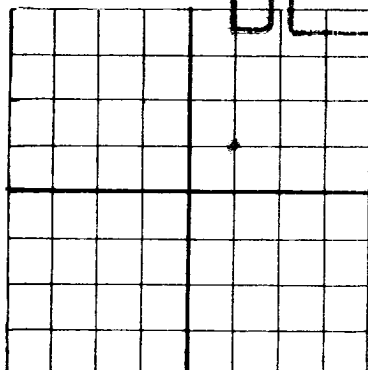



DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Sam Weiner

Box 297, Wink, Texas

Company or Operator

Address

Wentz State

Well No. #1

SW.SW.NE.

16

T. 20

Lease

R. 32

N. M. P. M.

Halfway

Field,

Lea

County.

Well is 2310 feet south of the North line and 2310 feet west of the East line of Sec. 16-20-32

If State land the oil and gas lease is No. 1919 Assignment No. B-7887

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Leigh Taliaferro Address San Antonio, Texas

Drilling commenced May 30th 1940 Drilling was completed July 11th 1940

Name of drilling contractor Sam Weiner Address Wink, Texas

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2425 to 2510 No. 4, from to

No. 2, from 2556 to 2559 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 280 to 300 feet. 50 feet from top

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	32	8	L.W.	936	T.P.				
7"	24	8	S.S.	2367	T.P.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8-5/8"	936	50	Halliburton		
8	7"	2537	100	do		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 2559 feet, and from feet to feet

PRODUCTION

Put to producing July 12th 1940

The production of the first 24 hours was 360 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be. 26-1

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

L. A. Ash Driller Grover Parish Driller

H. R. Humphrey Driller J. L. Parr Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

day of July 1940

Margaret A. Wheeler
Notary Public

Winkler County, Texas

My Commission expires June 1st, 1941

Name Date

Position Production Supt.

Representing Sam Weiner

Company or Operator

Address Box 297, Wink, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15	15	Calechi
15	40	25	Red Sand
40	50	10	Sand & Gravel
50	200	150	Red Bed
200	240	40	Sand
240	360	120	Red Bed & Sand
360	400	40	Sandy Shale
400	500	100	Red Bed
500	530	30	Shale & Gyp
530	565	35	Red Rock & Red Bed
565	910	345	Anhydrite
910	920	10	Shale & Salt
920	1080	160	Salt & Anhydrite
1080	1110	30	Anhydrite & Potash
1110	2294	1184	Salt & Anhydrite
2294	2332	38	Anhydrite
2332	2394	62	Lime (Show of Gas at 2338)
2394	2405	11	Brown Lime
2405	2444	39	Lime
2444	2467	23	Gray Sandy Lime
2467	2482	15	Brown Lime
2482	2495	13	Brown & Gray Lime
2495	2520	25	Lime - Show of Oil
2520	2530	10	Broken Lime
2530	2556	26	Hard Gray Lime
2556	2559	3	Soft Lime - Hole filled with Oil
	2559		TOTAL DEPTH