


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

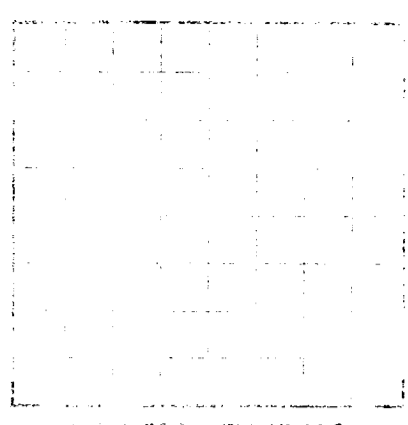

LOG OF OIL OR GAS WELL

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

This well was originally drilled as the Ritchie & Reeves #1
 stote & other Federal to a total depth of 3605', and plugged and
 abandoned on 1-1-62. Subsequently, Oscar Bourg Drilling Company
 reentered this test on December 30, 1962, cleaned out plugs and
 progressed to penetrate and test the Queen sandstone at a total depth
 of 4800'. However, on January 4, 1963, while drilling at a total depth
 of 4120', circulation was lost and after attempting to regain circu-
 lation for 48 hours it was determined that abandonment was necessary.
 URS, Hobbs, New Mexico, office was contacted and plugging instructions
 were received and complied with. The test was subsequently plugged
 and abandoned on January 6, 1963.

OIL OR GAS SANDS OR SLATES

HISTORY OF OIL OR GAS WELL

16-48094-2 U. S. GOVERNMENT PRINTING OFFICE

FROM-	TO-	TOTAL FEET	FORMATION
			FORMATION AND LITHOLOGICAL RECORD
			PLUGS AND BRIDGES
			HOLES AND TESTS
			LOGS AND SAMPLES
			DATA
			REMARKS
			FORMATION RECORDED