

HOBBS OFFICE COPY

(SUBMIT IN TRIPlicate)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Lead Office NEW MEXICO


Lead No. 10000

File No. 10000

RECEIVED

JUL 28 1958

U. S. GEOL.  
HOBBS, NEW MEXICO

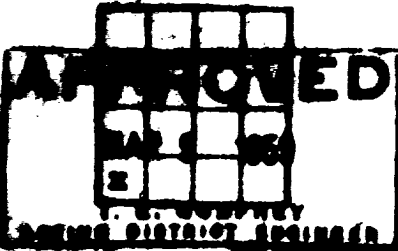

SUNDRY NOTICES AND REPORTS ON WELLS

REPORT OF INVENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
REPORT OF INVENTION TO CHANGE PLANT.....	SUBSEQUENT REPORT OF SINKINGS OR ACIDING.....
REPORT OF INVENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
REPORT OF INVENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
REPORT OF INVENTION TO SHUT OR ACIDIFY.....	SUBSEQUENT REPORT OF ABANDONMENT.....
REPORT OF INVENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
REPORT OF INVENTION TO ABANDON WELL.....	

(RECORDS ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 25, 1958

Phillips Federal

Well No. 1 is located 660 ft. from S line and 660 ft. from W line of sec. 15

20 34 100 NEW MEXICO  
(County or Sub-Division) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

Show names of and expected depths to objectives, depths, weights, and lengths of proposed casings; indicate casing jobs, cementing points, and all other important proposed work.

In accordance with telephone conversation Mr. [Name] of July 23rd. Rigged cement plug from 2975 to 3025. Spooled off 1/2" casing @ 1025'. Put 15 cas casing plug from 295 to 2975'. Set marker at surface in 10 cas plug. Survey shows top of cement on outside of 1/2" to be at 2975'.

3-6-59 for OK Marker OK See about pit 300' east of well  
7 ok

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company MINER & MINER  
Address 302 GUYER BUILDING  
ALBUQUERQUE, NEW MEXICO

By [Signature]  
Title Partner