

USGS - 5
MSSCG - 2
File


Form 9-831a
(Feb. 1951)

Budget Bureau No. 42-R:58.4.
Approval expires 12-31-60

(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office **Santa Fe**
Lease No. **10-066126-1**
Unit **Crosses No. 4**

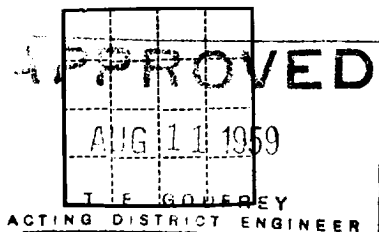

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 6, 1959

Well No. 4 is located 330 ft. from N line and 2316 ft. from E line of sec. 26
SE/4 SE/4 Sec. 26 20-S 34-E
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Lynch Los Alamos New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3743 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Cemented 4-1/2" ID 9.5# casing at 3750' with 472 sacks (1975 cu. ft.) regular 40# ID (395 sacks ID) followed by 190 sacks regular cement. Pumped plug to 3798'. Cement circulated. WOC 21 hours. Tested casing with 1500# for 30 minutes, no pressure loss.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Phillips Petroleum Company

Address Box 2105, Hobbs, New Mexico

By T. F. Godfrey

Title District Chief Clerk