


**SCOUT REPORT**  
**NEW MEXICO OIL CONSERVATION COMMISSION**

**MONUMENT-PADDOCK**

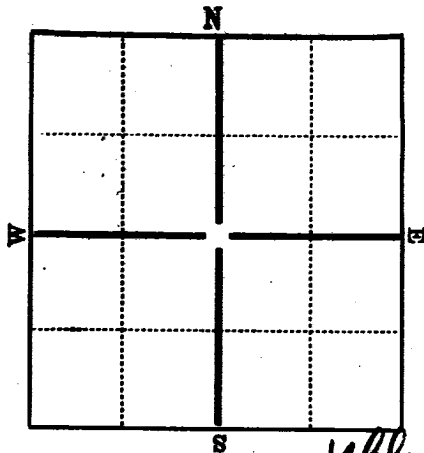

Company Amerada Pet. Corp.  
 Farm Name State D Well No. 5  
 Sec. 1 Twp. 20 Range 36 County Lea  
 Feet from Line: 766 N. S. E. 1874 W.  
 Elevation 3586 Method   
 Contractor Stab  
 Spudded 3-17-48 Completed 4-30-48

**AMOUNT  
CASING & CEMENTING RECORD**

| Size   | Feet | Inches | Sax Cement |
|--------|------|--------|------------|
| 13 3/8 | 190  |        | 200        |
| 8"     | 2796 |        | 1550       |
| 5 1/2" | 5215 |        | 500        |
|        |      |        |            |
|        |      |        |            |

**TUBING RECORD**

~~2~~ 5104  
5200  
 PACKER X 5091

**ACID RECORD**

Gals.

500 (21)  
 Top Pay 5160

|                |                |
|----------------|----------------|
| TA <u>940</u>  | TG             |
| TX <u>1050</u> | SA <u>5100</u> |
| TCA            | TGI            |
| BX <u>2220</u> | TYo            |
| TY <u>2390</u> | TABo           |
| TSR            | TPenn          |
| TQ             | TOrd           |

**SHOOTING RECORD**

| No. of Quarts | From | To |
|---------------|------|----|
| S/            | S/   | S/ |
| S/            | S/   | S/ |
| S/            | S/   | S/ |

| Date   |                                      | Date   |                               |
|--------|--------------------------------------|--------|-------------------------------|
| 3-24   | Drig. @ 2550, Lime & Anhydrite.      |        |                               |
| MAR 31 | <u>3346 L.</u>                       |        | <u>Prof 5150-60-40' hole</u>  |
| APR 7  | <u>4244 L.</u>                       |        | <u>Drig</u>                   |
| APR 14 | <u>5090 L.</u>                       | APR 28 | <u>TD 5220 L. Down</u>        |
| APR 21 | <u>TD 5215' DO 5213</u> <u>Awby.</u> |        | <u>flo &amp; tap - higher</u> |
|        | <u>Cave 5115-65-40' hole.</u>        |        | <u>No re. well found</u>      |
|        | <u>10' Sandy Dolo - Green</u>        |        | <u>At bottom 5212</u>         |
|        | <u>15' Dolo - 5/4 tan + Por.</u>     |        | <u>lg. 5 and DO 5205</u>      |
|        | <u>15' self Dolo good Por + tan</u>  |        | <u>Prof. 5150-65-40' hole</u> |
|        | <u>Cave 2- 5167-5215-48'</u>         |        | <u>At 5090-14-5200</u>        |
|        | <u>Por + Med stain</u>               |        | <u>cut 32.50 @ 5215</u>       |
|        |                                      |        | <u>1/4" ch</u>                |

fl. 203 Bfl. - 24 hrs.  
44" ch. - 590 BSt  
Parker 5155  
Ref. 5193 - 5207 - 56 shots  
tot. - 500 AIX - 4558 Bfl. - 3 hrs.  
cut 6% BStW - 3 131 Bfl. - 15 hrs.  
cut 7.5% W - GOR 4373,  
39.8° - F - 181 Bfl. - 24 hrs.  
cut 7.3% W - GOR 6375.  
39.8° -

MAY 5 TD 5220 L.  
IPF 109 BOPD nat