


RECEIVED
JAN 24 1938
REGISTRAR
HOBBS OFFICE

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

WELL RECORD

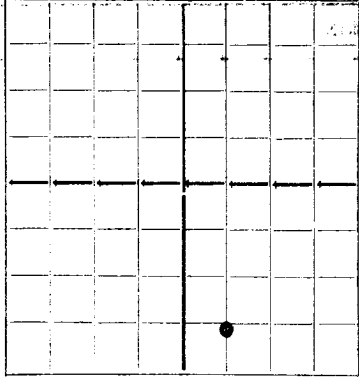

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation **Tulsa, Oklahoma**
Company or Operator Address

C. H. Kyte Well No. **2** in **SW SE** of Sec. **7**, T. **19S**
Lease

R. **37E**, N. M. P. M., **Monument** Field, **Lea** County.
 Well is **1980** feet south of the North line and **1980** feet west of the East line of **SW SE**

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is _____ Address _____

If Government land the permittee is _____ Address _____

The Lessee is **Gulf Oil Corporation** Address **Tulsa, Oklahoma**

Drilling commenced **11-29-** 19 **37** Drilling was completed **12-28-** 19 **37**

Name of drilling contractor **Loffland Brothers** Address **Tulsa, Oklahoma**

Elevation above sea level at top of casing **3708** feet.

The information given is to be kept confidential until **?** 19 _____

OIL SANDS OR ZONES

No. 1, from **3760'** to **4033'** No. 4, from _____ to _____
 No. 2, from **Pay 3920'** to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **Rotary hole** to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	32.75	8	SC LW	285'				
7-5/8	26.4	8	SC LW	1345				
5-1/2	17	10	**	3839				
** 59 jts. or 1396'6" of SC LW on bottom.					79 jts. or 2431'7" National Seamless Grade "D" on top.			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4"	10-3/4	285'	200	Halliburton	Used 400# of calcium chloride	
9-7/8	7-5/8	1345	350	Halliburton		
6-3/4	5-1/2	3839	275	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydrochloric Acid	2000 gal.	12-26-37	4033'	
		Hydrochloric Acid	5000 gal.	12-28-37	4033	

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0'** feet to **4033'** feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **January 1,** 19 **38**
 The production of the first 24 hours was **199** barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours **505,000** Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller
 _____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20 Tulsa, Oklahoma January 19, 1938
 day of January, 1938 Name [Signature]
 Position General Superintendent

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	50'		Caliche & shells
	95		Caliche
	110		Sand
	150		Red bed & shells
	260		Red rock
	293		Red bed
	330		Red rock
	380		Red bed
	420		Red rock
	763		Red bed & shells
	780		Red bed
	1298		Red rock & shells
	1318		Red rock
	1440		Anhydrite
	2635		Anhydrite & salt
	2718		Anhydrite
	2745		Anhydrite & lime
Total depth	4033		Lime
			Anhydrite 1318'
			Salt Base 2600
			Pay 3920