

N MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico
Place

6/18/37
Date


OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as _____

Tide Water Associated Oil Company. State "J" Well No. 3 in NW

of Sec. 17, T. 19, R. 37, N. M. P. M., Monument Field, Lea County.

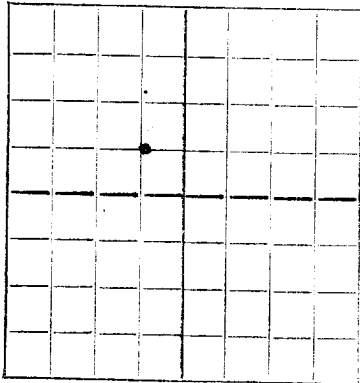

The well is 1980 feet [] [S.] of the North line and 1980 feet [E.] [] of the West line of Section 17-19-37

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____ Assignment No. 4487-1

If patented land the owner is _____

Address _____

If government land the permittee is _____

Address _____

The lessee is Tide Water Associated Oil Company

Address Box 731-Tulsa, Okla.

We propose to drill well with drilling equipment as follows: Rotary

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water carries blanket bond of \$10,000 w/United States Fidelity and Gauranty Co. as Security.

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	13"OD	40	New	225'	Cemented	250
12"	9-5/8"OD	36	New	1250'	Cemented	550
8-3/4"	7"OD	24	New	3900'	Cemented	300

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3900' feet.

Additional information: 13"OD Casing will be cemented w/sufficient cement to reach back to surface. 9-5/8"OD Casing will be set at top of salt and will be cemented at least 10' above bottom of 13"OD Casing. 7"OD Casing will be cemented with 150% of the calculated amount of cement to cement back to base of the salt.

Approved: _____ 19____
except as follows:

Sincerely yours,

Tide Water Associated Oil Company
Company or Operator

By F. Schneider - J. L.

Position Prod. Sup't.

Send communication regarding well to

Name F. Schneider

Address Drawer KK Hobbs, N New Mexico

OIL CONSERVATION COMMISSION,

By _____

Title _____