

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

July 19, 1937

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Place

Date

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

**Tide Water Associated Oil Company. State "J"** Well No. **4** in **NM**

Company or Operator Lease of Sec. **17**, T. **19**, R. **37**, N. M. P. M., **Monument** Field, **Lea** County.

N.

The well is **660** feet ~~xx~~ [S.] of the **North** line and **1980** feet

[E.] ~~xx~~ of the **West** line of **Section 17-19-37**

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. \_\_\_\_\_ Assignment No. **4487-1**

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_


If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is **Tide Water Associated Oil Company**

Address **Box 731-Tulsa, Okla.**

We propose to drill well with drilling equipment as follows: **Rotary**

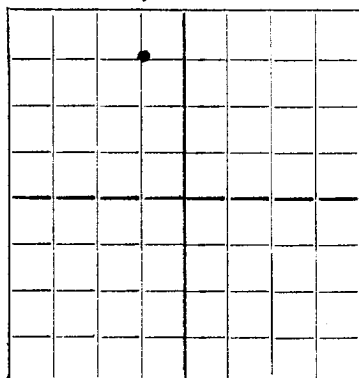

AREA 640 ACRES  
LOCATE WELL CORRECTLY

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission

is as follows: **Tide Water carries blanket bond of \$10,000 W/United States Fidelity and Caution Co. as Security.**

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	13"OD	40	SH	225'	Cemented	250
12"	9-5/8"OD	36	New	1250'	Cemented	550
8-3/4"	7"OD	24	New	3900'	Cemented	300

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about **3900'** feet.

Additional information: **13"OD Casing will be cemented w/sufficient cement to reach back to surface. 9-5/8"OD Casing will be set at top of salt and will be cemented at least 10' above bottom of 13"OD Casing. 7"OD Casing will be cemented with 150% of the calculated amount of cement to cement back to base of salt.**

Approved \_\_\_\_\_  
except as follows:

**AUG 3 - 1937** 19 \_\_\_\_\_

Sincerely yours,

**Tide Water Associated Oil Company**

Company or Operator

By

*F. Schneider - P.E.*

Position **Prod. Sup't.**

Send communication regarding well to

Name **F. Schneider**

Address **Drawer KK Hobbs, N.M.**

OIL CONSERVATION COMMISSION,

By

Title **Oil & Gas Inspector**

**DUPLICATE**