

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico3/26/36OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Place

Date

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Tide Water Oil CompanyState FWell No. 1 in NW 1/4of Sec. 20, T. 19, R. 37, N. M. P. M., Monument Field, Lea County.

Company or Operator

Lease

N.

The well is 660' feet [N.] [S.] of the North line and 660' feet[E.] [W.] of the West line of Section 20-19-37

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

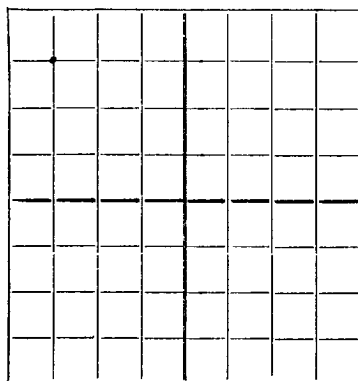
If state land the oil and gas lease is No. B-1651 Assignment No. 50169

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Tide Water Oil CompanyAddress Box 731, Tulsa, OklaAREA 640 ACRES  
LOCATE WELL CORRECTLYWe propose to drill well with drilling equipment as follows: Rotary

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water carries blanket bond of \$10,000 with US Fidelity and Gauranty Co. as Security.

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	12 1/2"	50	SH	220'	Cemented	250
11-3/4"	9-5/8" OD	36	New	1350'	"	600
8-3/4"	6-5/8" OD	24	New	3800'	"	350

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3900' feet.

Additional information:

12 1/2" Surface Casing will be set at about 220' and cemented to the top

9-5/8" OD Casing will be set at top of salt and 150% cement used to cement to top.

6-5/8" OD Casing will be set at top of pay and 150% cement used to fill up to base of salt.

Approved \_\_\_\_\_, 19\_\_\_\_  
except as follows: MAR 30 1936

Sincerely yours,

Tide Water Oil Company

Company or Operator

By F. Schneider - S.P.Position Prod. Sup't

Send communication regarding well to

Name F. SchneiderAddress Drawer "KK" Hobbs N.M.

Subject to special regulations for drilling and casing wells in this area

OIL CONSERVATION COMMISSION,

By [Signature]Title Oil & Gas Inspector

DUPLICATE