

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

5/27/36

Place

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Tide Water Oil Company State **F** Well No. **2** in **Wet**

Company or Operator

Lease

of Sec. **20**, T. **19S**, R. **37E**, N. M. P. M., **Monument** Field, **Lea** County.

N.

The well is **660** feet **N.** (S.) of the **North** line and **1980** feet

(E.) (**X**.) of the **West** line of **Section 20-19S-37E**

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. **B-1651** Assignment No. **50169**

If patented land the owner is

Address


If government land the permittee is

Address

The lessee is **Tide Water Oil Company**

Address **Box 731, Tulsa, Okla**

We propose to drill well with drilling equipment as follows: **Rotary**

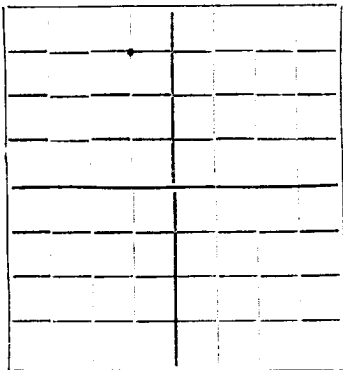

AREA 640 ACRES
LOCATE WELL CORRECTLY

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: **Tide Water carries blanket bond of \$10,000 with US Fidelity and Guaranty Co. as Security.**

We propose to use the following strings of casing and to land or cement them as indicated:

| Size of Hole | Size of Casing | Weight Per Foot | New or Second Hand | Depth | Landed or Cemented | Sacks Cement |
|--------------|----------------|-----------------|--------------------|-------|--------------------|--------------|
| 17" | 13"OD | 45 | New | 220' | Cemented | 250 |
| 12-3/4" | 9-5/8"OD | 36 | New | 1350' | " | 600 |
| 8-3/4" | 6-5/8"OD | 24 | New | 3800' | " | 350 |

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about **3900'** feet.

Additional information: **13"OD Surface Casing will be set at about 220' and cemented to the top. 9-5/8"OD Casing will be set at top of salt and 150% cement used to cement to top. 6-5/8"OD Casing will be set at top of pay and 150% cement used to fill up to base of salt.**

Approved **MAY 30 1936**, 19.....
except as follows:

Sincerely yours,

Subject to special regulations for drilling and casing wells in this area

Tide Water Oil Company
Company or Operator

By **F. Schneider - P.S.**

Position **Prod. Sup't**

Send communication regarding well to

Name **F. Schneider**

Address **Drawer EK, Hobbs, New Mexico**

OIL CONSERVATION COMMISSION,

By **[Signature]**

Title **Oil & Gas Inspector**

REPORT OF INVESTIGATION

TO DIRECTOR, FBI (100-442610) FROM SAC, NEW YORK (100-100000) (P) (NY 100-100000-100000)

RE: [Illegible]

[Illegible text]

[Illegible text]

| NAME | ADDRESS | DATE | INITIALS |
|-------------|-------------|-------------|-------------|
| [Illegible] | [Illegible] | [Illegible] | [Illegible] |
| [Illegible] | [Illegible] | [Illegible] | [Illegible] |
| [Illegible] | [Illegible] | [Illegible] | [Illegible] |

[Illegible text]

NY 100-100000-100000

