

HOBBS

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


Budget Bureau No. 42-R358.4
Approval Expires 12-31-50

Land Office 30675 (a)

Lease No. _____

Unit _____

Form 9-331a
(Feb. 1951)

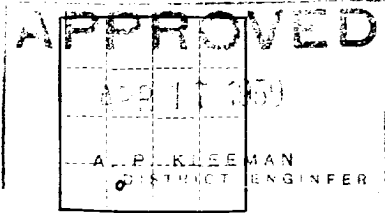

APR 17 1950

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	_____
NOTICE OF INTENTION TO CHANGE PLANS	_____	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	_____
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	_____	SUBSEQUENT REPORT OF ALTERING CASING	_____
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	_____	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	_____
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	_____	SUBSEQUENT REPORT OF ABANDONMENT	_____
NOTICE OF INTENTION TO PULL OR ALTER CASING	_____	SUPPLEMENTARY WELL HISTORY	_____
NOTICE OF INTENTION TO ABANDON WELL	_____		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. 2 is located 600 ft. from N line and 1000 ft. from E line of sec. 21
SW/4 of SW/4 Sec 21 19-3 37-3 21-3
Uniontown (Twp.) Lea (Range) 21-3 (Meridian) 21-3 21-3
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We propose to drill to 375' and set 3 1/2" API seamless 28 pound casing at that depth (375' of casing) with about 150 to 200 sacks of cement (enough cement to circulate to surface). We will then let cement set and later test the casing and cement for leaks before drilling ahead. After the casing and cement has been found to hold without leak under pressure test we will drill ahead to about 3900 feet and set 3870 feet of 4 1/2" 9 1/2 pound API seamless casing above the pay. After cement sets we will test the casing for leaks, and then, when no leaks are in evidence, we will drill the plug and complete from the top rayburn pay sand at about 3875-3895'. The casing set for production (4 1/2") will be cemented with about 900 sacks of cement which will be sufficient to cement all formations from the bottom of the 4 1/2" casing at about 3870' up to about 1600 feet above that point.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company 5 Zell Uniontown

Address Uniontown, Texas

By [Signature]

Title _____

COPY TO O. C. G.

HOBBS

(SUBMIT IN TRIPLICATE)


Budget Bureau No. 42-R358.4
Approval expires 12-31-50

Land Office **030673 (a)**

Lease No. _____

Unit _____

Form 9-331a
(Feb. 1951)

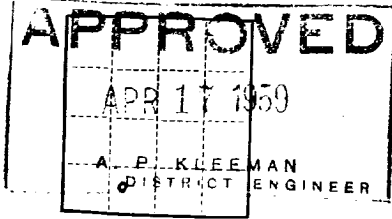

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APR 17 1959

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Sinclair-Federal April 16 1959

Well No. **2** is located **660** ft. from **N** line and **1650** ft. from **E** line of sec. **21**
SE/4 of SW/4 Sec 21 19-S **37-E** **19-S**

Unice-Monument (Twp.) **Lea** (Range) **New Mexico** (Merid.)

(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

We propose to drill to 300' and set 5 5/8" API seamless 28 pound casing at that depth (300' of casing) with about 150 to 200 sacks of cement (enough cement to circulate to surface). We will then let cement set and later test the casing and cement for leaks before drilling ahead. After the casing and cement has been found to hold without leak under pressure test we will drill ahead to about 3900 feet and set 3870 feet of 4 1/2" 9 1/4 pound API seamless casing above the pay. After cement sets we will test the casing for leaks, and then, when no leaks are in evidence, we will drill the plug and complete from the top Grayburg pay sand at about 3875-3895'. The casing set for production (4 1/2") will be cemented with about 900 sacks of cement which will be sufficient to cement all formations from the bottom of the 4 1/2" casing at about 3870' up to about 1600 feet above that point.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

C. E. Long
 Company **5 Bnell Building**
 Address **Midland, Texas**

By *C. E. Long*
 Owner
 Title _____

HOBBS

Budget Bureau No. 42-R358.4
Approval expires 12-31-60


Form 9-331a
(Feb. 1951)

(SUBMIT IN TRIPLICATE)

Land Office **030678 (a)**

Lease No. _____

Unit _____

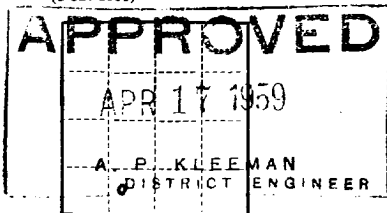

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APR 17 1959

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

April 16 1959

Well No. **2** is located **660** ft. from **N** line and **1650** ft. from **E** line of sec. **21**
SE/4 of SW/4 Sec 21 19-S **37-T** **NMDN**

Unice-Monument (Field) **Lea** (County or Subdivision) **New Mexico** (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

We propose to drill to 300' and set 8 5/8" API seamless 28 pound casing at that depth (300' of casing) with about 150 to 200 sacks of cement (enough cement to circulate to surface). We will then let cement set and later test the casing and cement for leaks before drilling ahead. After the casing and cement has been found to hold without leak under pressure test we will drill ahead to about 3900 feet and set 3870 feet of 4 1/2" 9 1/2 pound API seamless casing above the pay. After cement sets we will test the casing for leaks, and then, when no leaks are in evidence, we will drill the plug and complete from the top Grayburg pay sand at about 3875-3895'. The casing set for production (4 1/2") will be cemented with about 900 sacks of cement which will be sufficient to cement all formations from the bottom of the 4 1/2" casing at about 3870' up to about 1600 feet above that point.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

C. E. Long

Company **5 Esell Building**

Address **Midland, Texas**

By *C. E. Long*
(owner)

Title _____

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

FORM C-128
 Revised 5/1, 57

SEE INSTRUCTIONS FOR COMPLETING THIS FORM ON THE REVERSE SIDE

SECTION A


Operator C. E. Long		Lease Sinclair Federal 17 01		Well No. 2
Unit Letter N	Section 21	Township 19 South	Range 37 East	County Lea
Actual Footage Location of Well: 660 feet from the South line and 1650 feet from the West line				
Ground Level Elev. 3674.3	Producing Formation Grayburg		Pool Eunice-Monument	Dedicated Acreage. 40 Acres

1. Is the Operator the only owner in the dedicated acreage outlined on the plat below? YES NO . ("Owner" means the person who has the right to drill into and to produce from any pool, and to appropriate the production either for himself or for himself and another. (65-3-29 (e) NMSA 1935 Comp.)
2. If the answer to question one is "no," have the interests of all the owners been consolidated by communitization agreement or otherwise? YES NO . If answer is "yes," Type of Consolidation _____
3. If the answer to question two is "no," list all the owners and their respective interests below:

Owner	Land Description

APR 17 1959
 U. S. GEOLOGICAL SURVEY
 MOORE, NEW MEXICO

SECTION B

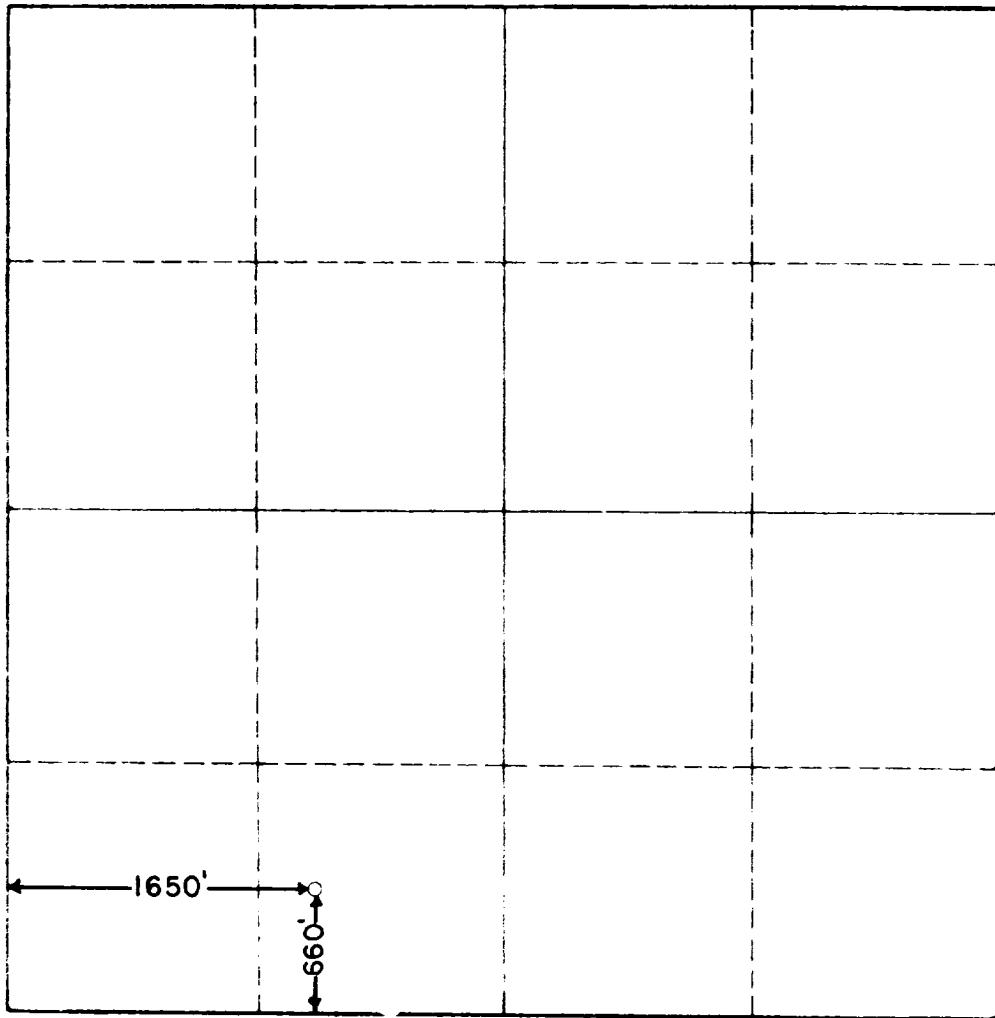

CERTIFICATION

I hereby certify that the information in SECTION A above is true and complete to the best of my knowledge and belief.

Name <i>C. E. Long</i>
Position Owner
Company C. E. Long
Date April 16, 1959

I hereby certify that the well location shown on the plat in SECTION B was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed 4-15-59
Registered Professional Engineer and or Land Surveyor, JOHN W. WEST
<i>John W. West</i>
Certificate No. N. M. - P. E. & L. S. NO. 676

0 330 660 990 1320 1650 1980 2310 2640 2000 1500 1000 500 0