


N.

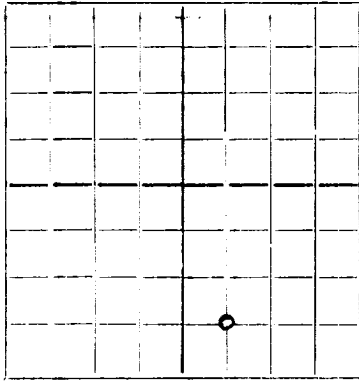

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Company or Operator STATE ELLIOTT Well No. 3 in SW 1/4 of Sec. 30, T. 19 S., R. 37 E., N. M. P. M., MONUMENT Field, LEA County.

Well is 330 feet North of the South line and 2310 feet west of the East line of SW 1/4 Sec. 30

If State land the oil and gas lease is No. A-3918 Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_, Address \_\_\_\_\_

If Government land the permittee is \_\_\_\_\_, Address \_\_\_\_\_

The Lessee is \_\_\_\_\_, Address \_\_\_\_\_

Drilling commenced 5-17 1936 Drilling was completed \_\_\_\_\_ 1936

Name of drilling contractor NOBLE DRILLING CO., Address TULSA, OKLAHOMA.

Elevation above sea level at top of casing 3607 feet.

The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_.

OIL SANDS OR ZONES

No. 1, from 3820 to 3925 No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ feet.

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.

No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>12 1/2</u>	<u>50</u>			<u>155</u>	<u>Reg.</u>				
<u>9-5/8</u>	<u>36</u>			<u>1235</u>	<u>Float</u>				
<u>7</u>	<u>24</u>			<u>3778</u>	<u>"</u>				
<u>2 1/2</u>	<u>6.5</u>			<u>3904</u>					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>13-3/4</u>	<u>12 1/2</u>	<u>155</u>	<u>150</u>	<u>Falliburton</u>	<u>Water</u>	
<u>12 1/2</u>	<u>9-5/8</u>	<u>1235</u>	<u>500</u>	<u>"</u>		
<u>9-3/4</u>	<u>7</u>	<u>3778</u>	<u>400</u>	<u>"</u>		

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_

Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		<u>Dowell XX</u>	<u>3000</u>	<u>6-20-36</u>	<u>3935</u>	

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	155	155	R. B. Sand & shells
155	165	10	Red Rock
165	361	196	R. R. & shells
361	451	90	Red Beds
451	551	100	Red Beds Hard shells
551	751	200	R. R. & shells
751	890	139	Red beds & R. R. & shells
890	1024	134	R. R. & shells
1024	1145	121	Shale & shells
1145	1295	150	Anhydrite
1295	1535	240	Salt, Anhydrite & shells
1535	1815	280	Potash, Anhydrite, shells & salt.
1815	2171	356	Salt, Anhydrite & shells
2171	2373	202	Salt.
2373	2390	17	Salt & Anhydrite.
2390	2436	46	Anhydrite
2436	2470	34	Salt & Anhydrite.
2470	2605	135	Anhydrite
2605	2646	41	Brown Lime.
2646	2704	58	B. lime, Anhydrite & shells.
2704	2847	143	Brown lime.
2847	2885	38	Brown lime & Gyp.
2885	2975	90	Brown Lime & anhydrite.
2975	3103	128	Brown lime.
3103	3153	50	Broken lime.
3153	3202	49	Brown lime broken.
3202	3243	41	Brown lime & Gyp.
3243	3274	31	Brown lime.
3274	3312	38	Broken lime.
3312	3332	20	Brown lime & Gyp.
3332	3459	127	Gray lime.
3459	3493	34	Gray lime, Broken.
3493	3571	78	Gray lime.
3571	3581	10	Gray lime & Gyp.
3581	3730	149	Gray lime.
3730	3740	10	Brown lime.
3740	3765	25	Broken lime, (gas)
3765	3790	25	Gray lime.
3790	3800	10	Lime.
3800	3855	55	Brown lime, carry O & G.
3855	3887	32	Broken lime.
3887	3897	10	B. lime, carry O & G.
3897	3925	28	Brown lime.
3925	3935	10	Blue lime.