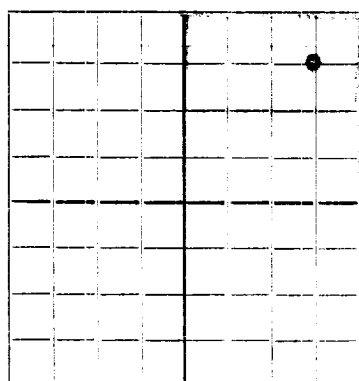


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

J. R. Phillips

Company or Operator

Lease

Well No. **2** in **NE NE** of Sec. **51**, T. **19S**R. **37E**, N. M. P. M., **Monument** Field, **Lea** County.Well is **660** feet south of the North line and **660** feet west of the East line of **NE NE**If State land the oil and gas lease is No. ***** Assignment No. _____

If patented land the owner is _____ Address _____

If Government land the permittee is _____ Address _____

The Lessee is **Gulf Oil Corporation** Address **Tulsa, Oklahoma.**Drilling commenced **7-30-36** 19____ Drilling was completed **8-25-36** 19____Name of drilling contractor **McQueen & Clevenger** Address **Fort Worth, Texas**Elevation above sea level at top of casing **3595** feet.The information given is to be kept confidential until **?** 19____

OIL SANDS OR ZONES

No. 1, from **5825** to **3925** No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **rotary hole** to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED TO	PURPOSE
10-3/4	32	8	Lapweld	227				
7-5/8	22	8	"	1289				
5-1/2	17	10	"	3785				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-5/4	227	235	Halliburton		
9-7/8	7-5/8	1289	300	"		
8-3/4	5-1/2	3785	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydrochloric	8-22-36	2000 gallons		
		Acid	8-24-36	5000 gallons		

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3925** feet, and from _____ feet to _____ feet

Cable toops were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **Sept. 1st, 1936** 19____The production of the first 24 hours was **648** barrels of fluid of which _____ % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours **603,000** Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller

_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **30th**day of **October**, 19 **36**

Notary Public

Tulsa, Oklahoma. October 30th, 1936

Place Date

Name **R. H. Darden**Position **General Superintendent**Representing **Gulf Oil Corporation**

Company or Operator

Address **Tulsa, Oklahoma.**My Commission expires **11/1/37**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	185'		Caliche and sand
	450		Red rock
	892		Red rock and shale
	1196		Red rock
	1540		Anhydrite
	1618		Salt and shells
	2220		Salt, Anhydrite and shells
	2255		Anhydrite
	2385		Salt, anhydrite and shells
	2410		Anhydrite
	2758		Anhydrite and Gyp
	2940		Anhydrite and lime
	2953		Gas sand
	2972		Lime and Anhydrite
	3613		Lime
	3633		Hard grey lime
	3933		lime