


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

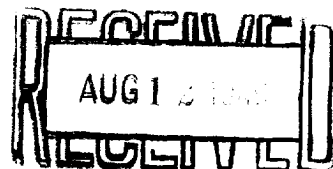

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes must be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

August 12, 1949

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico,

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as
Nolen & Lane J. H. Williams Well No. 1 in Sec. 34

of Sec. 34, T. 13S, R. 37E, N. M. P. M., Monument Field, Lea County.

The well is 330 feet (N.) (X) of the South line and 1980 feet
(E) (W.) of the East line of Sec. 34 - 13S - 37E

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. J. H. Williams Assignment No.

If patented land the owner is Monument, New Mexico

Address


If government land the permittee is

Address

The lessee is Nolen & Lane

Address Box 326; Hobbs, New Mexico

We propose to drill well with drilling equipment as follows: Cable Tools

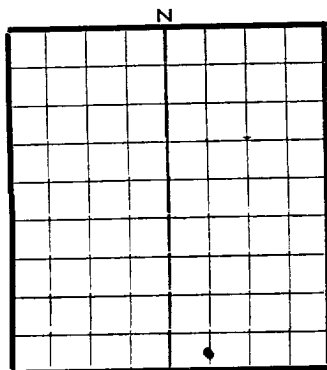

AREA 640 ACRES
LOCATE WELL CORRECTLY

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Blanket Bond

We propose to use the following strings of casing and to land or cement them as indicated:

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	NEW OR SECOND HAND	DEPTH	LANDED OR CEMENTED	SACKS CEMENT
13"	13"	70 lb.	Second	200	Cemented	100
15"	13"	50 lb.	" "	500	Landed	None
10 1/2"	10 3/4"	40 lb.	" "	800	"	"
10"	8 5/8"	30 lb.	" "	1300	"	"
8 "	5 1/2"	15 lb.	New	3700	Cemented	500 350

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3875 feet.

Additional information: Two stage tool will be run in 5 1/2" in anhydrite at top of salt.
200 sacks cement will be run at casing seat and 150 sacks through
two stage cementing tool.

Approved AUG 12 1949, 1949
Except as follows:

Sincerely yours,

Nolen & Lane

COMPANY OR OPERATOR

By B. H. NolenPosition Co Owner

Send communications regarding well to

Name Nolen & LaneAddress Box 326; Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By H. M. SeeveryTitle Engineer