


PROPOSED PLUG AND ABANDONMENT

7/9/99

Elev. = 3594' G.L. +10' K.B.

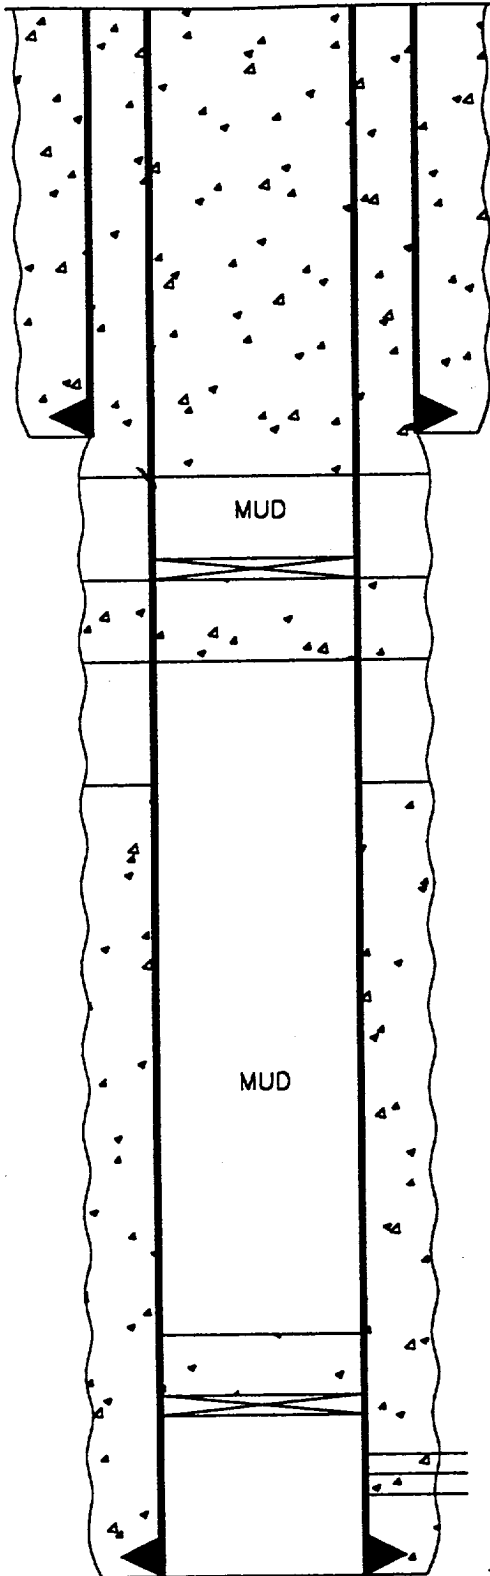

CIRCULATE 100 SXS CEMENT THRU PERFS
AT 375' TO SURFACE

324' - 8 5/8" Casing. Cemented w/250 sxs. Circulated to Surface
PERFORATE 5 1/2" CSG. AT 375'

SET A CEMENT RETAINER AT 1300'
SQUEEZE 40 SXS CEMENT THRU PERFS
PERFORATE 5 1/2" CSG. AT 1400'

T.O.C. @ 1550' (Temp. Survey)

SPOT 35' CEMENT ON TOP OF C.I.B.P.

C.I.B.P. @ 3450'

Perfs 3500'-3790'

3799' - 5 1/2", 14# Casing. Cemented w/1056 sxs

T.D. @ 3800'

CONOCO, INC.

State A-3 Gas Com. #1

1980' FSL & 660' FEL

Sec. 3, T-20S, R-37E

Lea County, NM