


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

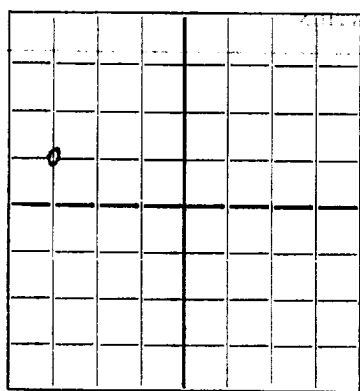

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

DUPLICATE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Ohio Oil Company, Hobbs, New Mexico
Company or Operator

Bertha Barber
Lease

Well No. 8 in ~~Block~~ of Sec. 5, T. 20 S.

R. 37 E, N. M. P. M., Monument Field, Lea County.

Well is 1980 feet south of the North line and 660 feet from west line of Sec. 5

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is Bertha J. Barber, Address Abilene, Oklahoma

If Government land the permittee is _____, Address _____

The Lessee is _____, Address _____

Drilling commenced Dec. 30th, 1936. Drilling was completed Feb. 11, 1937

Name of drilling contractor Noble Drilling Company, Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3558 feet.

The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 3830 to 3900 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/8"	40			136'10"	Reg			
9 5/8"	36			1125'8"	Float			
7"	24			3800'	Float			
2 1/2"	6.5			3880'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/8"	12 1/8"	136'10"	500	Halliburton	10	40
11	9 5/8"	1125'8"	500	Halliburton	10	40
8 3/4	7"	3800'	400	Halliburton	10	40

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3900 feet, and from _____ feet to _____ feet

Cable toops were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing Feb. 16, 1937

The production of the first 24 hours was 35 barrels of fluid of which 35% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

G.R. Lewis, Driller Bruce Harp, Driller
Red Davis, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3 day of _____, 1937

Notary Public

Hobbs, New Mexico 2/17/37 Date

Name _____ Position Sup't

Representing The Ohio Oil Company

My Commission expires _____ Address Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	90	90	Caliche & sand
90	135	45	Red bed
135	348	213	Red bed & shells
348	469	121	Red bed
469	615	146	Red bed & red rock
615	809	194	Red bed shells
809	975	166	Red rock shells
975	1075	100	Red rock
1075	1164	89	Red rock & Anhy
1164	1304	140	Anhy-Potash
1304	1362	58	Salt-Anhy
1362	1434	72	Anhy-Shells-salt
1434	1530	96	Salt-Potash-shells
1530	1745	215	Salt-Pot-Anhy
1745	1917	172	Salt-shells
1917	2151	234	Salt-shells-anhy
2151	2240	89	Salt
2240	2278	38	Anhy
2278	2295	17	Anhy-salt
2295	2319	24	Anhy-Gyp
2319	2399	80	Anhy
2399	2422	23	Anhy-Gyp
2422	2450	28	Anhy
2450	2527	77	Anhy-Gyp
2527	2558	31	Anhy-Lime streaks
2558	2575	17	Lime-Anhy
2575	2578	3	Gas
2578	2580	2	Lime
2580	2609	29	Anhy-brown lime
2609	2623	14	Anhy
2623	2638	15	Lime
2638	2658	20	Lime-Anhy
2658	2688	30	Lime
2688	2701	13	Lime-Gyp
2701	2724	23	Lime
2724	2754	30	Lime-anhy
2754	2774	20	Lime-gyp
2774	2834	60	Lime-anhy
2834	2860	26	Lime-showing of gas
2860	2915	55	Broken lime-anhy
2915	2935	20	Lime
2935	2968	33	Lime-anhy
2968	2996	28	Lime
2996	3010	14	Lime-gyp
3010	3077	67	Lime
3077	3103	26	Lime-anhy
3103	3125	22	Lime
3125	3140	15	Broken lime
3140	3180	40	Lime
3180	3231	51	Brown lime
3231	3288	57	Lime
3288	3334	46	Brown lime
3334	3375	41	Lime
3375	3426	51	Brown lime
3426	3870	444	Lime
3870	3899	29	Brown lime-brown & gray, odor of oil
3899	3900	1	Lime