

**DISTRICT I**  
P.O. Box 1980, Hobbs, NM 88241

**DISTRICT II**  
P.O. Box Drawer DD, Artesia, NM 88210

**DISTRICT III**  
1000 Rio Brazos Rd., Aztec, NM 87410

**OIL CONSERVATION DIVISION**  
2040 Pacheco St.  
Santa Fe, NM 87505

WELL API NO. 30-025-05919
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil / Gas Lease No.
7. Lease Name or Unit Agreement Name North Monument G/SA Unit Blk. 21
8. Well No. 2
9. Pool Name or Wildcat Eunice Monument G/SA
10. Elevation (Show whether DF, RKB, RT,GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well  
OIL WELL  GAS WELL  OTHER

2. Name of Operator  
Amerada Hess Corporation

3. Address of Operator  
P.O. Box 840, Seminole, TX 79360


4. Well Location  
Unit Letter B 660 Feet From The North Line and 1980 Feet From The East Line  
Section 5 Township 20S Range 37E NMPM Lea COUNTY

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

<b>NOTICE OF INTENTION TO:</b>		<b>SUBSEQUENT REPORT OF:</b>	
PERFORM REMEDIAL WORK <input checked="" type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPERATIONS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>		CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: _____ <input type="checkbox"/>		OTHER: _____ <input type="checkbox"/>	

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Plan to MIRU pulling unit & TOH w/rods & pump. Remove wellhead, install BOP & TOH w/tbg. TIH w/6-1/4" bit & drill out retainer at 3734', cement, retainer at 3745', & cement to 3890'. Run GR/CCL/CAL/CNL/DEN. Spot 10-15 sx. Cement plug to 3858'. Acidize perms. fr. 3702' - 3727' & O.H. fr. 3750' - 3858'. Re-run prod. eqpt. & cont. prod. well.

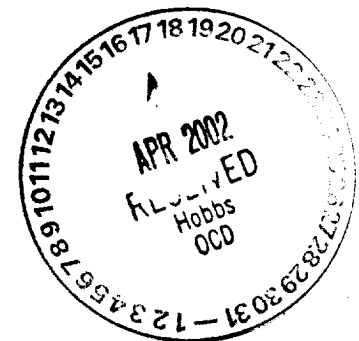

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Roy L. Wheeler, Jr. TITLE Bus. Svc. Spec. II DATE 04/15/2002

TYPE OR PRINT NAME Roy L. Wheeler, Jr. TELEPHONE NO. 915-758-6778

(This space for State Use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_

ORIGINAL SIGNED BY  
PAUL F. JAMES  
PETROLEUM ENGINEER

APR 18 2002

DeSoto 2000 1.0

54