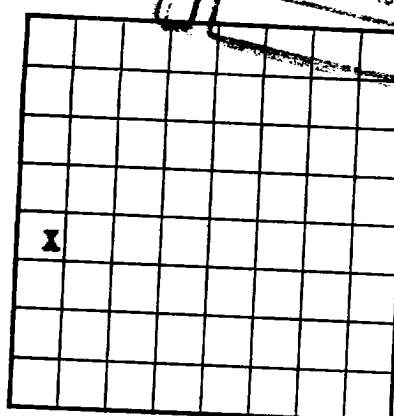


U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 031621 (a)
LEASE OR PERMIT TO PROSPECT LeaseRECEIVED
MAR 28 1951OIL CONSERVATION COMMISSION
HOBBBS STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOCATE WELL CORRECTLY

LOG OF OIL OR GAS WELL

Company Continental Oil Company Address Box CC, Hobbs, New Mexico
Lessor or Tract M. M. Britt A-6 Field Monument-Paddock State New Mexico
Well No. 4 Sec. 6 T. 20S R. 37E Meridian NMPH County New Mexico
Location 2130 ft. [N] of S. Line and 510 ft. [E] of W. Line of Section 6 Elevation 3574
(Denote floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date March 27, 1951Signed [Signature]
Title Asst. District Superintendent

The summary on this page is for the condition of the well at above date.

Commenced drilling October 20, 19 50 Finished drilling November 20, 19 50

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 2580 to 2650 (G) No. 4, from _____ to _____
No. 2, from 4020 to 4150 No. 5, from _____ to _____
No. 3, from 5184 to 5276 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10 3/4"	40#	8R	1-4	299'	Guide				
7 5/8"	24#	8R	2-40	2500'	Guide & Float Collar				
5 1/2"	14#	8R	1-58	211'					
5 1/2"	15.5#	8R	2-55	4561'					
5 1/2"	17#	8R	1-55	28'	Guide & Float Collar	(See History)			

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10 3/4"	345	250	Pump & plug		
7 5/8"	2580	677	Pump & plug		
5 1/2"	5279	382	Pump & plug		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from 0 feet to 5280 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19____ Put to producing January 1, 19 51
The production for the first 24 hours was 106 barrels of fluid of which 64 % was oil; _____ %
emulsion; 36 % water; and _____ % sediment. Gravity, °Bé. 38°
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

E. L. Wilborn, Driller E. L. Reid, Driller
D. E. Wilborn, Driller Nichols, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	1010	1010	Red Bed
1010	2160	1150	Salt & Anhydrite
2160	2300	140	Salt
2300	2350	50	Anhydrite, Shale & Salt
2350	2400	50	Anhydrite & Shale
2400	2450	50	Anhydrite
2450	2480	30	Anhydrite & Shale
2480	2490	10	Anhydrite
2490	2600	110	Anhydrite & Dolomite
2600	3900	1300	No Samples
3900	4400	500	Dolomite
4400	4500	20	No Samples
4500	5130	630	Dolomite
5130	5280	150	Dolomite

LOCATE WELL CORRECTLY

..... bougie

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED

$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{x}} \right) = \frac{\partial L}{\partial x}$

Journal of Interpersonal Violence 26(10) 1978-1994
© The Author(s) 2011
Reprints and permissions: <http://www.sagepub.com/journalsPermissions.nav>

CONCLUSIONS The results of this study indicate that the use of a single, low-dose, short-acting benzodiazepine, such as lorazepam, is an effective and safe method of sedation for the conscious, cooperative, and nonventilated patient. The use of a single, low-dose, short-acting benzodiazepine, such as lorazepam, is an effective and safe method of sedation for the conscious, cooperative, and nonventilated patient.

shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results.

HISTORY OF OIL OR GAS WELL

U. S. GOVERNMENT PRINTING OFFICE 16-43094-1

FORMATION RECORD—Continued