


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

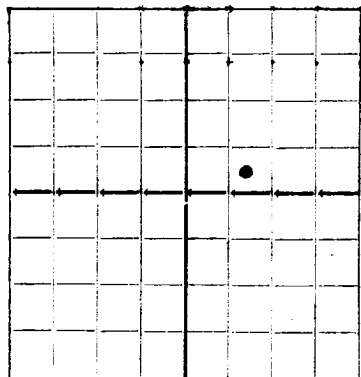

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Anderson-Prichard Production Corp., Hobbs, New Mexico.
Company or Operator Address

H.M. Britt Well No. 3 in C SE SW NE Sec. 7, T. 20S
Lease

R. 37E, N. M. P. M., Monument 2 Field, Lea County.

Well is 2310 feet south of the North line and 990 feet west of the East line of Sec 7-20S-37E

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is H.M. Britt Address

The Lessee is Address

Drilling commenced 6-5 19 36. Drilling was completed 7-21 19 36.

Name of drilling contractor Olson Drilling Co. Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3559 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3801 to 3802 G No. 4, from to

No. 2, from 3830 to 3885 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	LW	245	None			
9-5/8"	40#	8	Smls	2467	Baker			
7"	24#	10	Smls	3800	HOWCCo			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"	245	250	HOWCCo	10# gal	Hole full
12"	9-5/8"	2467	762	do	do	do
8 1/2"	7"	3800	335	do	do	do

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3885 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 7-25 19 36

The production of the first 24 hours was 183 barrels of fluid of which 100 % was oil; 0 % emulsion; 0 % water; and 0 % sediment. Gravity, Be. 32.0

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

E.H. Hailes Driller Herman Schweer Driller

Pete Green Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of 19

Notary Public

My Commission expires

Hobbs, N.M. 6 10 37
Place Date

Name Frank Green
Position Supt

Representing Anderson-Prichard Prod. Corp.
Company or Operator

Address Box 1697, Hobbs, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	38	38	Sand and caliche
38	75	37	Sand
75	268	193	Sand, water, gravel and thin lime shells
268	496	228	Redrock and sand
496	720	224	Redrock, redbeds and lime shells
720	837	117	Redrock and lime shells
837	941	104	Redrock, gyp and hard sand
941	1000	59	Redrock and lime
1000	1087	87	Anhydrite
1087	1125	38	Anhydrite and lime
1125	1227	102	Redrock and lime shells
1227	1370	143	Salt
1370	1405	35	Salt and anhydrite
1405	1552	147	Salt, anhydrite and shale
1552	1692	140	Salt, anhydrite and shells
1692	1725	33	Salt and anhydrite shells
1725	1743	18	Lime, potash and anhydrite
1743	2096	353	Salt
2096	2110	14	Gyp and anhydrite
2110	2232	122	Salt and potash
2232	2256	24	potash, shale and salt
2256	2322	66	Anhydrite and potash
2322	2475	153	Anhydrite
2475	2747	272	Anhydrite and lime
2747	2765	18	Lime
2765	2782	17	Sas sand - strong show of gas
2782	2792	10	Anhydrite
2792	2835	43	Anhydrite and lime
2835	2883	48	Brown lime
2883	2960	77	Brown lime and anhydrite
2960	3007	47	Lime
3007	3108	101	Lime and anhydrite
3108	3178	70	Lime
3178	3318	140	Lime and anhydrite
3318	3416	98	Lime
3416	3452	36	Brown and gray lime
3452	3496	44	Lime
3496	3515	19	Gray lime
3515	3625	110	Lime
3625	3725	100	Gray lime
3725	3777	52	Groken lime
3777	3885	108	Lime
3885			Total Depth