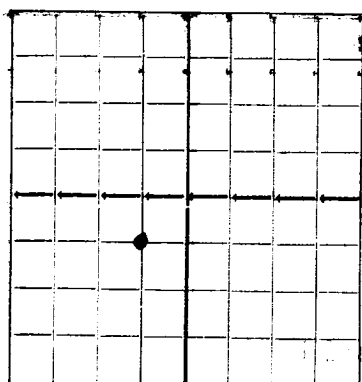


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Anderson-Prichard Oil Corporation

Hobbs, New Mexico

Company or Operator

Address

H.M. Britt

Well No. 5

in NE SW

of Sec. 7

T. 20S

Lease

R.37E

N. M. P. M., Monument

Field,

Lea

County.

Well is 3300 feet south of the North line and 3300 feet west of the East line of Sec 7-20S-37E

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is H.M. Britt Address

The Lessee is Address

Drilling commenced 11-14 19 36 Drilling was completed 12-20 19 36

Name of drilling contractor Olson Drilling Co. Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3548 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3355 to 3360 G No. 4, from to

No. 2, from 3780 to 3857 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	Ygstr	246	none			
9-5/8"	40#	8	"	2469	HOWCCO			
7"	24#	10	"	3766	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"	246	225	Halliburton	11# gal	circulated
12"	9-5/8"	2469	700	"	"	"
8 1/4"	7"	3766	300	"	"	"

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3857 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 12-21 19 36

The production of the first 12 hours was 528 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be 32 API

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Pete Green Driller E.A. Hailes Driller

H.L. Iske Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of 19

Notary Public

My Commission expires

Hobbs, N.M. 6-20-37

Name Frank Gray

Position Supt

Representing Anderson-Prichard Oil Corp

Company or Operator

Address Box 1697, Hobbs, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	70	70	Caliche and sand
70	100	30	Caliche
100	300	200	Sand and redbeds
300	940	640	Redrock and shells
940	972	32	Redrock and shale
972	1065	93	Anhydrite
1065	1098	33	Anhydrite and shale
1098	1240	142	Anhydrite, shale and salt
1240	1280	40	Shale
1280	1295	15	Anhydrite and lime
1295	1369	74	Shale, salt and lime shells
1369	1460	91	Anhydrite, salt and potash
1460	1535	75	Shale and salt
1535	1668	133	Salt and anhydrite
1668	1883	215	Anhydrite, potash and salt
1883	2110	227	Salt and anhydrite
2110	2125	15	Anhydrite
2125	2230	105	Salt and potash
2230	2285	55	Anhydrite and salt
2285	2418	133	Anhydrite
2418	2465	47	Anhydrite and lime
2465	2477	12	Anhydrite
2477	2482	5	Lime
2482	2557	75	Anhydrite
2557	2588	31	Anhydrite and lime
2588	2654	66	Lime
2654	2761	107	Lime and anhydrite
2761	2810	49	Lime
2810	2935	125	Brown lime and anhydrite
2935	2985	50	Lime
2985	3116	131	Lime and anhydrite
3116	3181	65	Lime
3181	3243	62	Lime and anhydrite
3243	3330	87	Broken lime with streaks anhydrite & gyp
3330	3857	527	Lime - show gas 3355' to 3360' - Oil from 3780' to 3857'
3857			TOTAL DEPTH