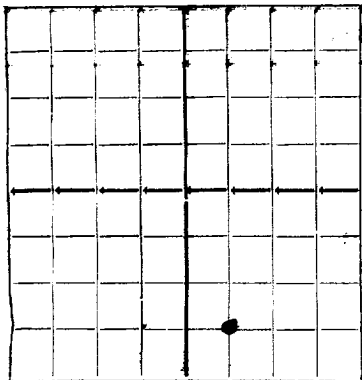


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Anderson-Prichard Oil Corporation Box 1697, Hobbs, New Mexico

Harry M. Britt Company or Operator Address  
Well No. 8 in C SW SE of Sec. 7, T. 20S

R. 37E N. M. P. M., Monument Field, Lea County.

Well is 4620 feet south of the North line and 1980 feet west of the East line of Sec 7-20S-37E

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is H.M. Britt Address

The Lessee is Address

Drilling commenced 1-17 1937 Drilling was completed 2-27 1937

Name of drilling contractor Olson Drilling Co. Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3545 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 2562 to 2588 G No. 4, from 3809 to 3865

No. 2, from 2600 to 2630 G No. 5, from to

No. 3, from 3762 to 3804 G No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	50&40#	8 & 10	LW	246	none			
9-5/8"	40#	8	Smls	2420	HOWCCo			
7"	24#	10	"	3809	"			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"	246	300	HOWCCo	1.32	circulated
12"	9-5/8"	2420	600	"	"	"
8 1/2"	7"	3809	300	"	"	"

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3865 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing 2-27 1927

The production of the first 24 hours was 160 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be 32.0

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

E.A. Hailes Driller J.D. Whatley Driller

Pete Green Driller Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Place

Date

Name

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	160	160	Caliche and sand
160	220	60	Sand and shells
220	265	45	Redbeds
265	728	463	Redbeds and shells
728	815	87	Redbeds and lime shells
815	873	58	Redbeds
873	1007	134	Redbeds and redrock
1007	1078	63	Anhydrite
1070	1180	110	Broken anhydrite
1180	1320	140	Anhydrite and shale
1320	1430	110	Anhydrite, shale and potash
1430	1467	37	Salt, shale, potash and streaks anhydrite
1467	1651	184	Salt, potash, anhydrite shells
1651	2100	449	Anhydrite, salt and potash
2100	2283	183	Salt, potash and anhydrite shells
2283	2540	257	Anhydrite
2540	2562	22	Brown lime and broken anhydrite
2562	2588	26	Broken lime - show gas
2588	2600	12	Broken lime
2600	2630	30	Anhydrite and lime - show gas
2630	2686	56	Anhydrite and lime
2686	2714	28	Brown lime and anhydrite
2714	2725	11	Brown lime
2725	2766	41	Brown lime and anhydrite
2766	3195	429	Anhydrite and lime
3193	3210	15	Anhydrite
3210	3250	40	Broken sandy lime
3250	3280	30	Brown lime
3280	3312	32	Brown and gray lime
3312	3333	21	Hard gray lime
3333	3448	115	Gray lime
3448	3479	31	Brown and gray lime
3479	3555	76	Gray lime
3555	3570	15	Gray lime, hard
3570	3617	47	Brown and gray lime
3617	3643	26	Gray lime
3643	3708	65	Gray and brown lime - broken
3708	3740	32	Lime
3740	3804	64	Gray lime
3804	3865	61	Brown and gray lime
3865			TOTAL DEPTH