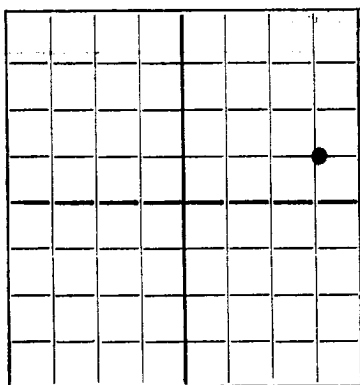



N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

WELL RECORD

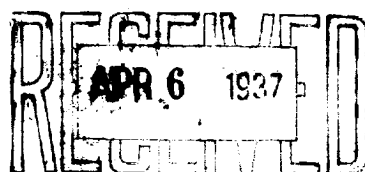

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (X). SUBMIT IN TRIPLICATE.

DUPLICATE

Gulf Oil Corporation

Bertie Whitacre

Company or Operator

Lease

Well No. 4 in SE NE of Sec. 8, T. 20S

R. 37 E, N. M. P. M., Monument Field, Lee County.

Well is 660 feet south of the North line and 400 feet west of the East line of SE NE

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced 2-5-37 19 Drilling was completed 2-26-37 19

Name of drilling contractor McQueen &amp; Clevenger Address Fort Worth, Texas

Elevation above sea level at top of casing 3556 feet.

The information given is to be kept confidential until 1 19

## OIL SANDS OR ZONES

No. 1, from 3765' to 3881' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-5/4"	32.75	8	SC LS	207'				
7-5/8"	22	8	"	2580'				
5-1/2"	17	10	"	3812'				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4"	10-5/4"	207'	150	Halliburton		
9-7/8"	7-5/8"	2580'	250	"		
6-3/4"	5-1/2"	3812'	475	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3881' feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing 3-1-37 19

The production of the first 24 hours was 1208 barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 1,404,000 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

, Driller , Driller

, Driller , Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 31st

day of March, 19 37

Tulsa, Oklahoma

3-31-37

Name

Position General Superintendent

Representing Gulf Oil Corporation

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	1050'		Caliche
	1050		Red bed
	1138		Anhydrite
	1178		Salt & anhydrite
	1485		"
	2288		Salt, anhydrite, shells
	2710		Anhydrite
	2764		Sandy lime
	3881		Lime
			TOPS
	1085'		Anhydrite
	1200		Salt <del>base</del> top
	2515		Salt base
	2640		Brown lime