


Orig: & cc: OCC
cc: VDA

DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

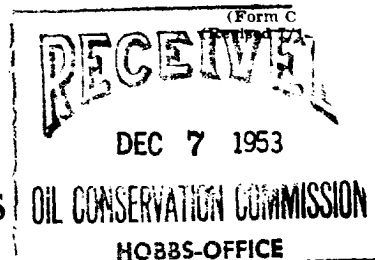

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

December 5, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company

(Company or Operator)

Bertha J. Barber

(Lease)

Milhean Drig. Co.

(Contractor)

, Well No. **11** in the **NW** $\frac{1}{4}$ **SW** $\frac{1}{4}$ of Sec. **8**

T **20 S**, R **37 E**, NMPM, **Monument Blinbry** Pool, **Lea** County.

The Dates of this work were as follows: **11-30-53**

Notice of intention to do the work (~~was~~) (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

- TD 5688** - Set 5 1/2" OD casing @ 5687 and cemented with 330 sacks of cement. Let set 72 hours and tested with 750# pump pressure. No decrease in pressure for 30 minute period. Temperature survey was ran and found top of cement behind 5 1/2" casing @ 3180 from surface.
- PB 5686** - Perforated 5 1/2" casing from 5636 to 5686 with four jet shots per foot. Ran 5645' of 2" UE tubing, swabbed 75 barrels of new oil in 6 hours natural. Acidized with 500 gallons of mud acid thru perforations 5636 to 5686. Well flowed 495 barrels of new oil in 11 hours, thru 3/4" choke.

Witnessed by **Homer E. McIntyre**
(Name)

Sinclair Oil & Gas Co.
(Company)

Asst. Foreman
(Title)

Approved: **OIL CONSERVATION COMMISSION**

S. J. Stanley
(Name)

Engineer District 1

(Title)

DEC 7 1953

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name *E. C. Carter*

Position **Dist. Supt.**

Representing **Sinclair Oil & Gas Co.**

Address **Box 1927 Hobbs, New Mexico**