


NEW MEXICO OIL CONSERVATION COMMISSION

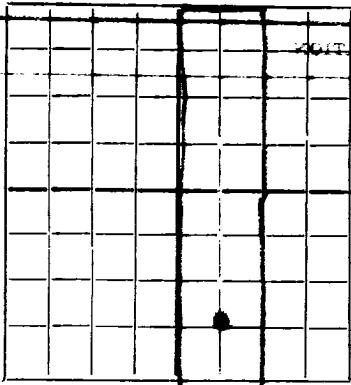

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Graham State Co

Company or Operator

Lease

Well No. 548

of Sec. 24

100

R. 348, N. M. P. M., Monument

Lea

County.

Well is 600 feet south of the North line and 600 feet west of the East line of 348

If State land the oil and gas lease is No. A-1548 Assignment No.

If patented land the owner is - Address

If Government land the permittee is - Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma.

Drilling commenced 5-7-36 19 Drilling was completed 6-2-36 19

Name of drilling contractor Loffland Bros. Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 5708 feet.

The information given is to be kept confidential until ? 19

OIL SANDS OR ZONES

No. 1, from 3035 to 4017 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to feet.

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4	32.75	8	Lapw.	267'					
7-5/8	28	8	Lapw.	1227'					
5-1/2	17	10	Lapw.	5845'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10-3/4	10-3/4	267'	200	Halliburton		
7-5/8	7-5/8	1227'	200	"		
6-3/4	5-1/2	5845'	200	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydrochloric A.	1000 gal.	6-1-36		
		"	2000 Gal.	6-2-36		

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4017 feet, and from feet to feet

Cable tools were used from - feet to - feet, and from feet to feet

PRODUCTION

Put to producing June 16th, 19 36

The production of the first 24 hours was 912 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

? Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27th

Tulsa, Oklahoma. July 27th, 1936

day of July, 19 36

Name

J. L. Boyer
Notary Public.

Position General Superintendent

Representing Gulf Oil Corporation

My Commission expires June 26, 1939

Address Tulsa, Oklahoma.

