

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instruction
verse side)Form approved.
Budget Bureau No. 43-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 0631

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Federal Lea

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Lea Bone Springs

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 11 T-20-S, R-34E

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1.

OIL
WELL☐GAS
WELL☐

OTHER

Oil well which was P & A 9-22-70

2. NAME OF OPERATOR

Edwin Foster Blair

3. ADDRESS OF OPERATOR

2215 Wilco Bldg., Midland, Texas 79701

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)
At surface

1900' FSL, 2060' FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3653' KB

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

☐
☐
☐
☐

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

Replug well

☐
☐
☐
☐
☒

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

☐
☐
☐

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

☐
☐
☐(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The following replugging procedure is proposed:

- 1) Re-enter well and drill out cement plugs to 8 5/8" casing shoe at 5429'.
- 2) Spot 50 sx cement plug 5429'-5249' (180') at 8 5/8" casing shoe.
- 3) Spot 30 sx cement plug 3600'-3708' (108') at 8 5/8" DV tool.
- 4) Spot 75 sx cement plug 1565'-1700' (135') at top of salt section.
- 5) Spot 75 sx cement plug 708' - 815' (107') at 13 3/8" casing shoe.
- 6) Spot 10 sx cement plug 0-10' (10') at surface.

If unable to get inside 8 5/8" stub at 2535', the following replugging procedure is proposed:

- 1) Re-enter well and drill out cement plugs to 8 5/8" casing stub 2535'.
- 2) Spot 75 sx cement plug 2400'-2535' (135') at 8 5/8" casing stub.
- 3) Spot 75 sx cement plug 1565'-1700' (135') at top of salt section.
- 4) Spot 75 sx cement plug 708'-815' (107') at 13 3/8" casing shoe.
- 5) Spot 10 sx cement plug 0-10' (10') at surface.

AMENDMENT: Conditions encountered during plugging operations may necessitate changes in proposed plugging procedure.

18. I hereby certify that the foregoing is true and correct

SIGNED

B. J. Johnson

TITLE

Agent

DATE


September 2, 1975

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

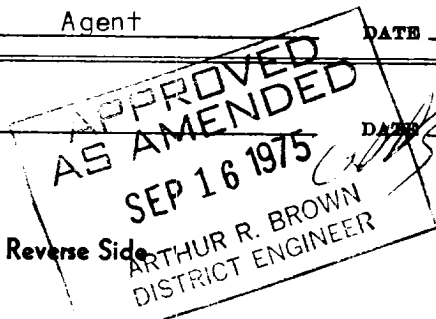

*See Instructions on Reverse Side