

State of New Mexico
Energy, Minerals and Natural ResourcesOIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505FORM C-103
Revised March 25, 1999

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-06347
1. Type of Well: <input checked="" type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER		5. Indicate Type of Lease <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE
2. Name of Operator Apache Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 2000 Post Oak Blvd., Ste. 100, Houston, Texas 77056-4400		7. Lease Name or Unit Agreement Name Northeast Drinkard Unit
4. Well Location Unit Letter <u>F</u> : <u>1973</u> Feet From The <u>North</u> Line and <u>1650</u> Feet From The <u>West</u> Line Section <u>2</u> Township <u>21S</u> Range <u>37E</u> NMPM <u>Lea</u> County		8. Well No. 118
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3503' GR		9. Pool name or Wildcat Eunice N., Blinbry-Tubb-Drinkard

11.

NOTICE OF INTENTION TO:

- ☐ Perform Remedial Work ☒ Plug and Abandon
☐ Temporarily Abandon ☐ Change Plans
☐ Pull or Alter Casing
☐ Other


SUBSEQUENT REPORT OF:

- ☐ Remedial Work ☐ Altering Casing
☐ Commence Drilling Operations ☐ Plug and Abandonment
☐ Casing Test and Cement Job
☐ Other

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- Set CIBP @ 5650' and cap w/ 35' cement
PERF @ 2605'/50' ~~CEMENT OUT + 50' IN TAG @ 2505'~~
- ~~Spot cement plug 2500' - 2600' w/ 50 sx~~
1470' - 1370'
- Spot cement plug 920' - 1020' w/ 50 sx ~~Tag top of plug~~
- Perforate 4-1/2" casing @ 375'. Set cement retainer @ 350'. Cement squeeze behind 4-1/2" casing circulating to surface inside and outside casing
- Install P&A marker

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Sr. Engineering Technician

DATE

2/20/2002

TYPE OR PRINT NAME

Debra J. Anderson

TELEPHONE NO.

713-296-6338

(This space for State Use)

APPROVED BY

ORIGINAL SIGNED BY

DATE

CONDITIONS OF APPROVAL, IF ANY:

OC FIELD REPRESENTATIVE II/STAFF MANAGER

FEB 22 2002


ms

WELL:
POOL:
LOCATION:
COUNTY/STATE:

Northeast Drinkard Unit No. 118
Eunice N., Blinebry-Tubb-Drinkard
1973' FNL & 1650' FWL
Unit F, Sec 2, T-21S, R-37E
Lea County, New Mexico

API No. 30-025-06347

Current Completion

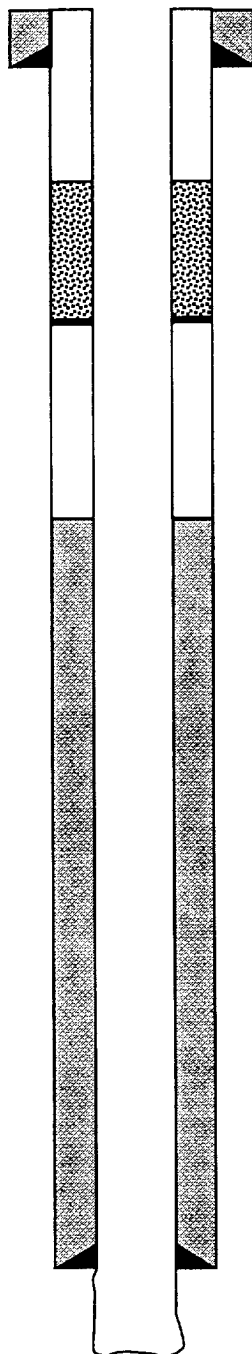

17-1/4" Hole
13-3/8" 48# J-55 CSA 326'
Cement w / 335 sx
Circulated to Surface


Perforate 4-1/2" @ 1480'
Cement squeeze behind casing w/ 400 sx
TOC @ 970' (Temperature Survey)

Open Hole:
Paddock 5682' – 5780'
Blinebry 5780' – 6150'

7-7/8" Hole
4-1/2" 9.5/11.6# J-55/N-80 CSA 5682'
Cement w / 570 sx
TOC @ 2560' (Temperature Survey)

TD @ 6150'

P&A Proposal

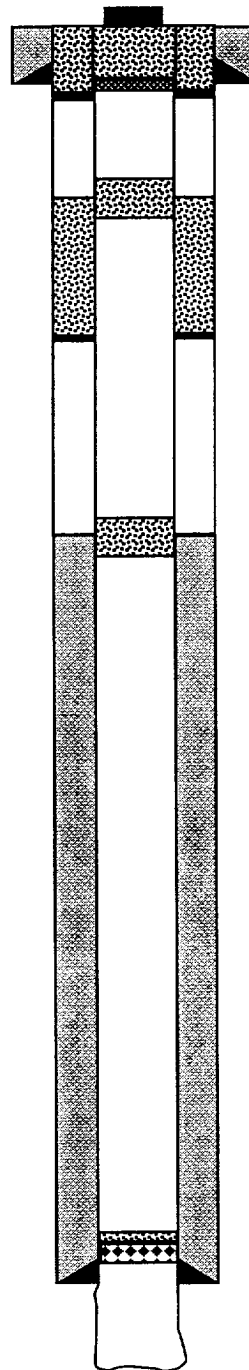

Install P&A Marker
Surface Plug – Perforate
4-1/2" casing @ 375' / Set
CICR @ 350' – Squeeze
behind casing w/ 300 sx
circulating to surface inside
and outside casing

Cement Plug 920' – 1020'
w/ 50 sx – Tag top of plug

Cement Plug 2500' – 2600'
w/ 50 sx



CIBP @ 5650'
w/ 35' cement