

6-USGS-Roswell
1-File
1-CM-Foreman

N. M. OIL CONS. COMMISSION
P. O. BOX 1980
HOBBS, NEW MEXICO 88240
1-Engr-RH
1-Fluor-Midland

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Getty Oil Company

3. ADDRESS OF OPERATOR
P.O. Box 730; Hobbs, New Mexico 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: Unit Ltr. J, 2180' FSL & 1980'
AT TOP PROD. INTERVAL: FEL
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF
- FRACTURE TREAT
- SHOOT OR ACIDIZE
- REPAIR WELL
- PULL OR ALTER CASING
- MULTIPLE COMPLETE
- CHANGE ZONES
- ABANDON*
- (other) Move in Rotary

SUBSEQUENT REPORT OF:

-
-
-
-
-
-
-
-

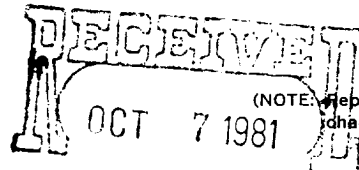

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

5. LEASE	NM-22809
6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
7. UNIT AGREEMENT NAME	
8. FARM OR LEASE NAME	North Bilbrey 7 Federal
9. WELL NO.	1
10. FIELD OR WILDCAT NAME	North Bilbrey Prospect
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	Sec. 7, T-21-S, R-32-E
12. COUNTY OR PARISH	Lea
13. STATE	NM
14. API NO.	
15. ELEVATIONS (SHOW DF, KDB, AND WD)	3640.2 GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 8 1/2" hole to 80' w/cable tool. Rigged up Rotary (Empire Drilling Company), 9-18-81, @ 3:00 A.M. Drilled 12 1/4" hole to 520'. Ran and set 13 Jts. (500') 13 3/8" OD, H-40, 48#, 8rd, ST&C R-3 casing and set @ 520'. Western Co. cemented 13 3/8" w/550 sxs. Class "C" cement w/2% CaCl. Circulated 135 sxs. WOC 38 hrs. Pressured up to 600# on casing for 30 Min. O.K.

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Walter A. Chappelt TITLE _____ DATE October 5, 1981

(This space for Federal or State office use)

APPROVED BY OCT 15 1981 TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO