

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

4/15/36

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico.

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

**Tide Water Oil Company. Anna Walden**

Well No. **1** in **SE 1/4**

Company or Operator Lease

of Sec. **21**, T. **22S**, R. **37E**, N. M. P. M., **South Eunice** Field, **Lea** County.

N.

The well is **1980** feet (N.) (X) of the **South** line and **660** feet

(W.) of the **East** line of **Sec 21-22S-37E**

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. Assignment No.

If patented land the owner is **Anna Walden**


Address **Amburst, Texas**

If government land the permittee is

Address

The lessee is **Tide Water Oil Company**

Address **Box 731, Tulsa, Okla**

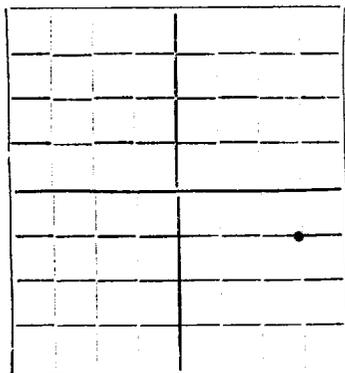

AREA 640 ACRES  
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: **Cable Tools**

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission

is as follows: **Tide Water carries blanket bond of \$10,000 with US Fidelity and Security**

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
19 1/2	15 1/2	70	SH	140	Cemented	25
15	12 1/2	50	SH	380	Landed	
12 1/4	10-3/4	40	SH	650	Landed	
10	8 1/2	32	SH	1400	Cemented	30
8	6-5/8" OD	24	New	3350	Cemented	150

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about **3500** feet.

Additional information **15 1/2" Casing will be set at about 140' or at least 15' in the red bed formation and cemented to the surface. 8 1/2" casing will be set in top of salt & cemented w/80-sacks, which will bring cement back close to bottom of 10-3/4" at 650'. 6-5/8" OD casing will be set at about 3350' and cemented w/150' of the calculated amount of cement to fill back to base of salt.**

Approved except as follows:

APR 16 1936

Sincerely yours,

**12 1/2, 10-3/4" casing will be pulled after cementing 8 1/2" casing.**

Subject to special regulations for drilling and casing wells in this area

OIL CONSERVATION COMMISSION,

By

Title **Oil & Gas Inspector**

Company or Operator **Tide Water Oil Company**

By **F. Schneider**

Position **Prod. Sup't**

Send communication regarding well to

Name **F. Schneider**

Address **Drawer KK Hobbs, N.M.**

