

Submit to Appropriate
 District Office
 State Lease-6 copies
 Fee Lease-6 copies

State of New Mexico
 Energy, Minerals and Natural Resources Department

Form C-101
 Revised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088
 Santa Fe, New Mexico 87504-2088

DISTRICT I
 P.O. Box 1980, Hobbs, NM 88240
DISTRICT II
 P.O. Drawer Dd, Artesia, NM 88210
DISTRICT III
 1000 Rio Brazos Rd., Aztec, Nm 87410

API NO. (assigned by OCD on New Wells) <u>30-025-31740</u>
6. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. N/A

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OF PLUG BACK					
1a. Type of Work: DRILL <input checked="" type="checkbox"/> RE-ENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/>			7. Lease Name or Unit Agreement Name ARROWHEAD GRAYBURG UNIT		
b. Type of Well: OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER INJECTOR <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. Well No. 229		
2. Name of Operator CHEVRON U.S.A. INC.			9. Pool name or Wildcat ARROWHEAD GRAYBURG		
3. Address of Operator ROOM 3104 P.O. BOX 1150, MIDLAND, TX 79702 ATTN: P.R. MATTHEWS					
4. Well Location Unit Letter <u>G</u> : <u>2256</u> Feet From The <u>NORTH</u> Line an <u>2062</u> Feet From The <u>EAST</u> Line Section <u>18</u> Township <u>22S</u> Range <u>37E</u> NMPM <u>LEA</u> County					
		10. Proposed depth 4500		11. Formation GRAYBURG	12. Rotary or C.T. ROTARY
13. Elevation (Show DF, RT, GR, etc.) 3416 GE		14. Kind & Status Plug Bond BLANKET		15. Drig Contractor ROD-RIC	16. Date Work will start 10-15-92
17. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
12 1/4"	8 5/8"	23	1350'	800	SURFACE
7 7/8"	5 1/2"	15.5	4500'	900	SURFACE

MUD PROGRAM: 0-1350' FRESH WATER SPUD MUD, 9.0 PPG.
 1350'-4500' BRINE WATER AND STARCH SYSTEM, 10.0 PPG.

BOPE EQUIPMENT: 2000 PSI WORKING PRESSURE, SEE ATTACHED
 CHEVRON U.S.A. CLASS II DRAWING.

IN ABOVE SPACE DESCRIBE PROPOSED IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODDUTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE P.R. Matthews TITLE TECHNICAL ASSISTANT DATE 9-28-92

TYPE OR PRINT NAME P.R. MATTHEWS TELEPHONE NO. (915)687-7812

APPROVED BY DISTRICT I SUPERVISOR TITLE ORIGINAL SIGNED BY JERRY SEXTON DATE SEP 30 '92
 CONDITIONS OF APPROVAL, IF ANY:

Permit Expires 6 Months From Approval
 Date Unless Drilling Underway.

RECEIVED

SEP 29 1992

OCD HOBBS OFFICE

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410


WELL LOCATION AND ACREAGE DEDICATION PLAT

All Distances must be from the outer boundaries of the section


Operator CHEVRON U.S.A. INC.			Lease ARROWHEAD GRAYBURG UNIT			Well No. 229		
Unit Letter G	Section 18	Township 22 SOUTH	Range 37 EAST	NMPM		County LEA		
Actual Footage Location of Well: 2256 feet from the NORTH line and 2062 feet from the EAST line								
Ground Level Elev. 3416.2'		Producing Formation GRAYBURG			Pool ARROWHEAD /GB		Dedicated Acreage: 40 Acres	

- Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
 - If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
 - If more than one lease of different ownership is dedicated to the well, have the interest of all owners been consolidated by communitization, unitization, force-pooling, etc.?

Yes No If answer is "yes" type of consolidation _____
- If answer is "no" list of owners and tract descriptions which have actually been consolidated. (Use reverse side of this form necessary.)
No allowable will be assigned to the well unit all interests have been consolidated (by communitization, unitization, forced-pooling, otherwise) or until a non-standard unit, eliminating such interest, has been approved by the Division.

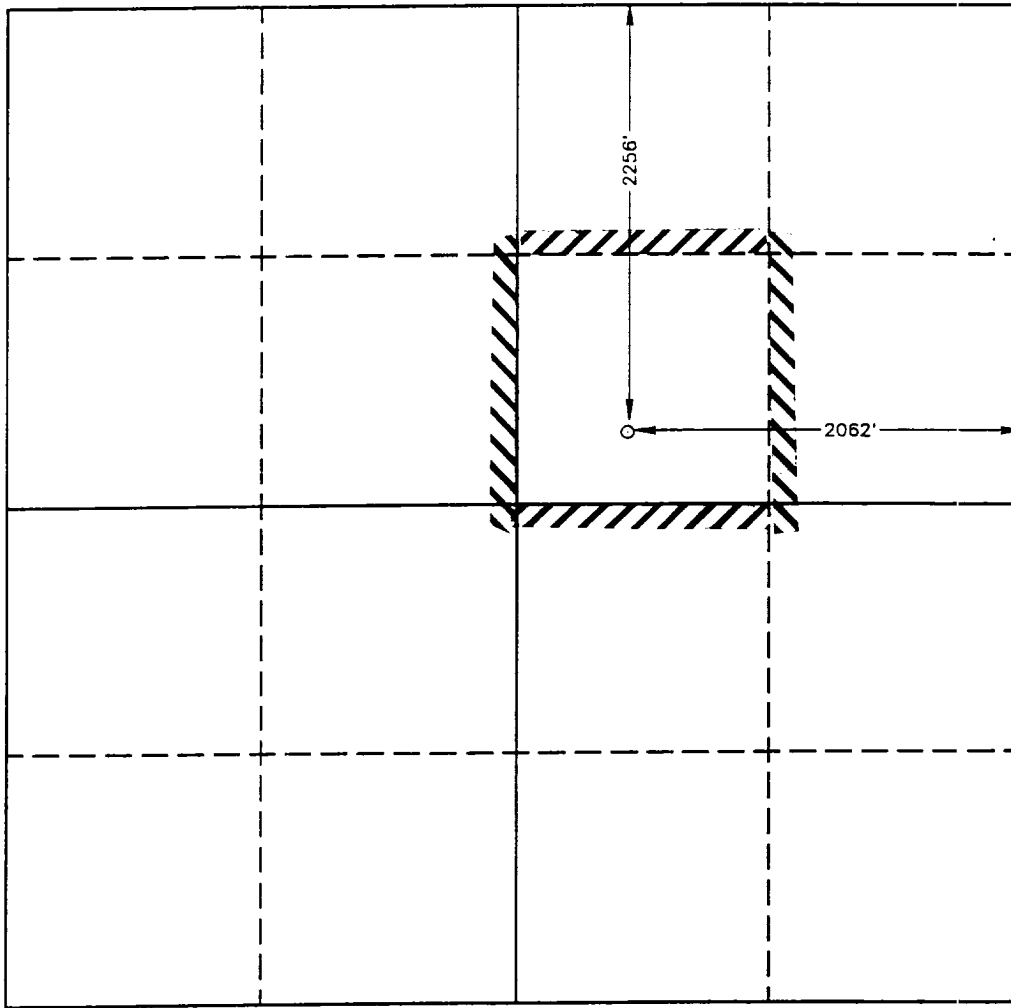


OPERATOR CERTIFICATION	
<i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</i>	
Signature	<i>P.R. Matthews</i>
Printed Name	P.R. MATTHEWS
Position	TECHNICAL ASSISTANT
Company	CHEVRON U.S.A. INC.
Date	9-28-92
SURVEYOR CERTIFICATION	
<i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.</i>	
Date Surveyed	SEPTEMBER 15, 1992
Signature & Seal of Professional Surveyor	



CHEVRON DRILLING REFERENCE SERIES
VOLUME ELEVEN
WELL CONTROL AND BLOWOUT PREVENTION

D. CLASS II-B BLOWOUT PREVENTER STACK:

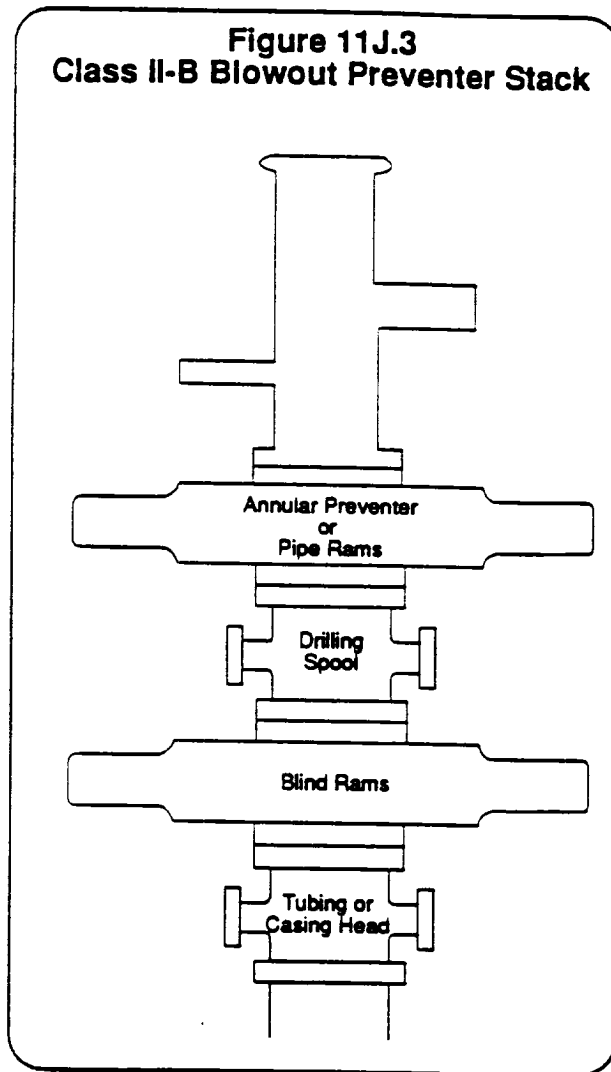


The Class II-B preventer stack is designed for drilling or workover operations. It is composed of a single hydraulically operated annular preventer on top, then a drilling spool, and a single blind ram preventer on bottom. In an alternate configuration, a single pipe ram preventer may be substituted for the annular preventer. The choke and kill lines are installed onto the drilling spool and must have a minimum internal diameter of 2". An emergency kill line may be installed on the wellhead. As the maximum anticipated surface pressure of this stack is less than 2000 psi, screwed connections may be used. All components must be of steel construction. The Class II-B blowout preventer stack is shown to the left in Figure 11J.3.

CHEVRON DRILLING REFERENCE SERIES
VOLUME ELEVEN
WELL CONTROL AND BLOWOUT PREVENTION

C. CLASS II CHOKE MANIFOLD

The Class II choke manifold is suitable for all Class II workovers and drilling operations. The Class II choke manifold is shown below in Figure 11J.7. Specific design features of the Class II choke manifold include:

1. The manifold is attached to the tubing/casing head when a Class II-A preventer stack is used. This hook-up is only recommended for Class II workover operations.
2. The manifold is attached to a drilling spool or top ram preventer side outlets when a Class II-B preventer stack is in use.
3. The minimum internal diameter is 2" (nominal) for outlets, flanges, valves and lines.
4. Includes two steel gate valves in the choke line at the wellhead/drilling spool outlet. The inside choke line valve may be remotely controlled (HCR).
5. Includes one manually adjustable choke which is installed on the side of the manifold cross. Steel isolation gate valves are installed between the choke and the cross, and downstream of the choke.
6. Includes one bleed line installed on the side of the manifold cross which is isolated by a steel gate valve.
7. Includes a pressure gauge suitable for drilling service which can display the casing pressure within view of the choke operator.
8. Screwed connections may be used in lieu of flanges or clamps.

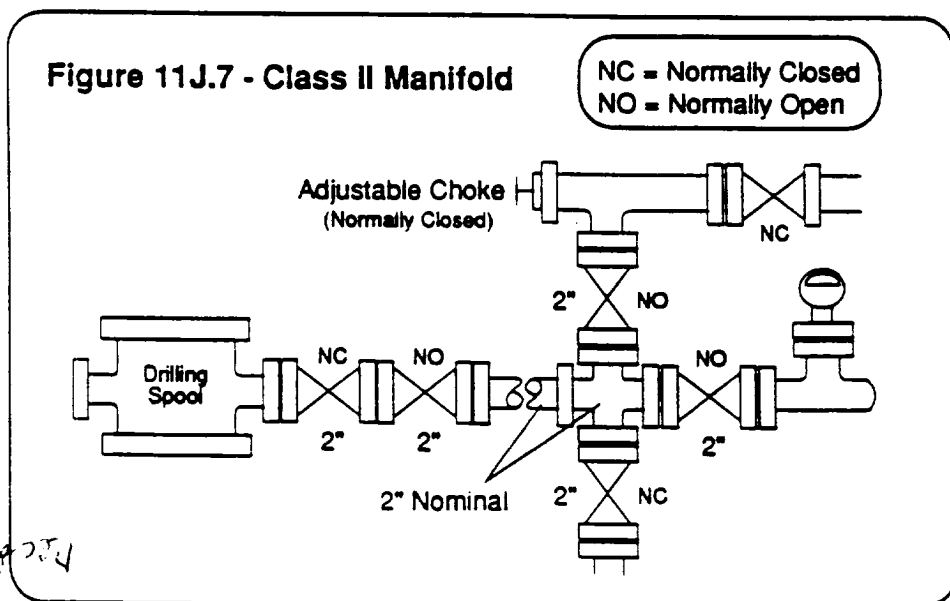

545-2874
11J

RECEIVED

SEP 29 1992

OOD HOBBS OFFICE