

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE

PROPERTY NO. 15704
CODE 59945
DATE 9-22-94
APPROVAL NO. 30-025-32676

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. Type of Work **DRILL** **DEEPEN**
 1b. Type of Well
 OIL WELL GAS WELL OTHER
 SINGLE ZONE
 MULTIPLE ZONE

2. Name of Operator **TEXACO EXPLORATION & PRODUCTION INC.**

3. Address and Telephone No. **P.O. Box 3109, Midland Texas 79702 688-4606**

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
 At Surface
 Unit Letter **D** : **660** Feet From The **NORTH** Line and **660** Feet From The **WEST** Line
 At proposed prod. zone
SAME

14. Distance In Miles and Direction from Nearest Town or Post Office*
23 MILES EAST OF LOVING, NM

15. Distance From Proposed* Location to Nearest Property or Lease Line, Ft. (also to nearest drlg. unit line, if any) **660'**

16. No. of Acres in Lease **1994.13**

17. No. of Acres Assigned To This Well **46.48**

18. Distance From Proposed Location* to Nearest Well, Drilling, Completed or Applied For, On This Lease, Ft. **1st WELL**

19. Proposed Depth **8700'**

20. Rotary or Cable Tools **R**

21. Elevations (Show whether DF, RT, GR, etc.)
GR-3559' **Controlled Geologic Basin**

22. Approx. Date Work Will Start*
9/15/94

23 **PROPOSED CASING AND CEMENT PROGRAM**

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
14 3/4	WC40, 11 3/4	42#	970'	550 SACKS CIRCULATE
11	WC50, 8 5/8	32#	4500'	1450 SACKS } SEE
7 7/8	J-55, 5 1/2	15.5# & 17	8700'	1600 SACKS } STIPS.

CEMENTING PROGRAM:

SURFACE CASING - 350 SACKS CLASS C W/ 4% GEL, 2% CACL2 (13.5 PPG, 1.74 CF/S, 9.11 GW/S). F/B 200 SACKS CLASS C W/ 2% CACL2 (14.8 PPG, 1.34 CF/S, 6.3 GW/S).

INTERMEDIATE CASING - 1300 SACKS 35/65 POZ CLASS H W/ 6% GEL, 5% SALT, 1/4# FLOCELE (12.8 PPG, 1.94 CF/S, 10.4 GW/S). F/B 150 SACKS CLASS H (15.6 PPG, 1.18 CF/S, 5.2 GW/S).

PRODUCTION CASING - 1ST STAGE - 750 SACKS 50/50 POZ CLASS H W/ 2% GEL, 5% SALT, 1/4# FLOCELE (14.2 PPG, 1.35 CF/S, 6.3 GW/S). DV TOOL @ 6300'. 2ND STAGE - 750 SACKS 35/65 POZ CLASS H W/ 6% GEL, 5% SALT, 1/4# FLOCELE (12.8 PPG, 1.94 CF/S, 10.4 GW/S). F/B 100 SACKS CLASS H (15.6 PPG, 1.18 CF/S, 5.2 GW/S).

THERE ARE NO OTHER OPERATORS IN THIS QUARTER QUARTER SECTION.

**Approval Subject to
General Requirements and
Special Conditions**

In Above Space Describe Proposed Program: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured true verticle depths. Give blowout preventer program, if any.

24. I hereby certify that the foregoing is true and correct.

SIGNATURE C.P. Basham/cwb TITLE Drilling Operations Mgr. DATE 8/8/94

TYPE OR PRINT NAME C. P. Basham

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to these rights in the subject lease which would entitle the applicant to conduct operations thereon.

APPROVED BY Tony J. Herald TITLE AREA MANAGER DATE SEP 26 1994

CONDITIONS OF APPROVAL, IF ANY:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I
P. O. Box 1980, Hobbs, NM 88240

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994

DISTRICT II
P. O. Drawer DD, Artesia, NM 88210

Instructions on back

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

Submit to Appropriate District Office

DISTRICT IV
P. O. Box 2088, Santa Fe, NM 87504-2088

State Lease-4 copies
Fee Lease-3 copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

AMENDED REPORT


¹ API Number		² Pool Code		³ Pool Name TRISTE DRAW WEST	
⁴ Property Code		⁵ Property Name SDE FEDERAL "31"			⁶ Well Number 1
⁷ GRID No. 22351		⁸ Operator Name TEXACO EXPLORATION & PRODUCTION, INC.			⁹ Elevation 3559'

¹⁰ Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	⁷ County
D	31	23-S	32-E		660'	North	660'	West	Lea

¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	⁷ County

¹² Dedicated Acres 46.48	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION.

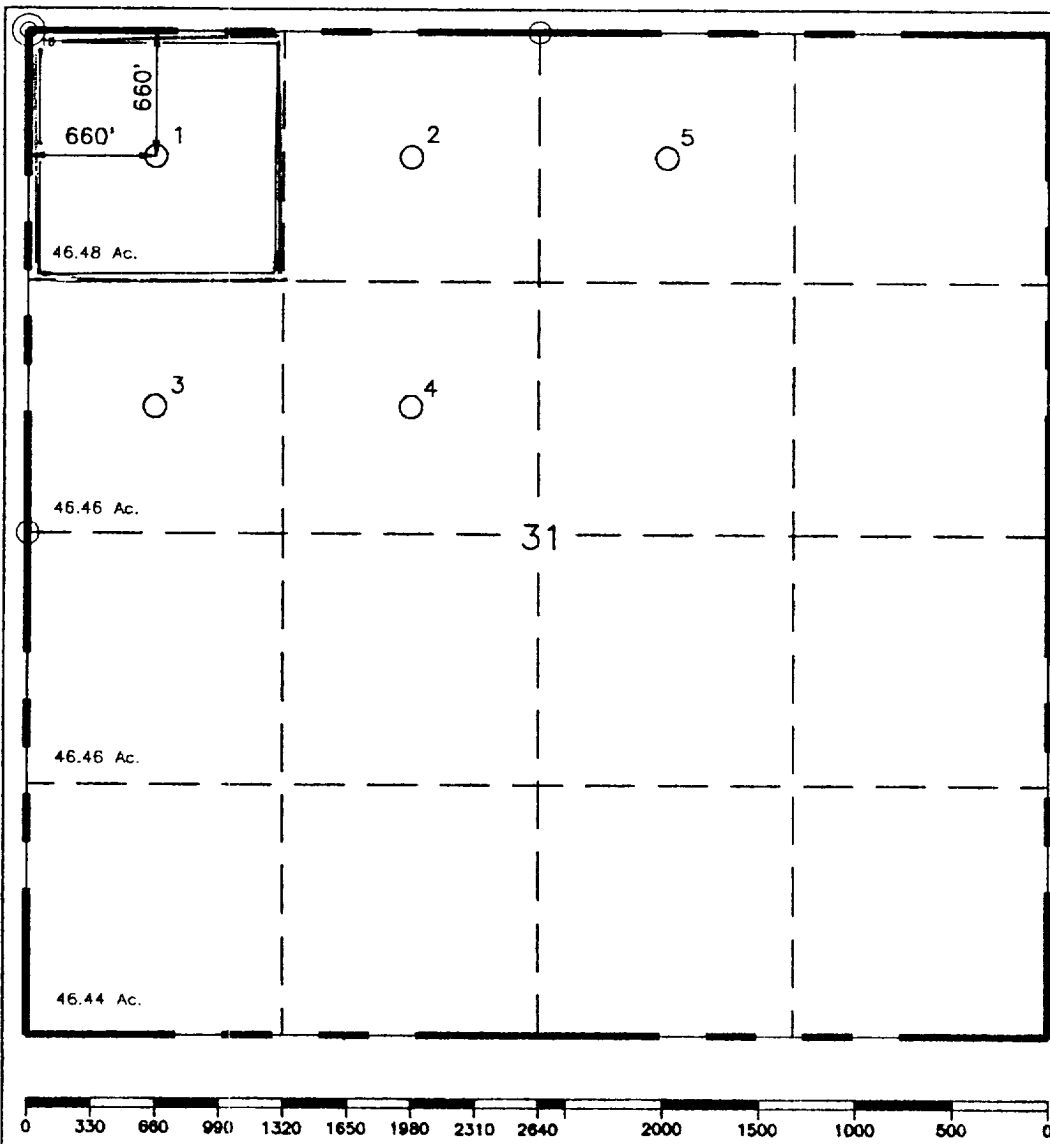

¹⁶OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Signature
Royce D. Mariott / cw#

Printed Name
Royce D. Mariott

Position
Division Surveyor

Company
Texaco Expl. & Prod. Inc.

Date
August 1, 1994

¹⁷SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
July 27, 1994

Signature & Seal of Professional Surveyor
John S. Piper

Certificate No.
7254 John S. Piper

○ = Staked Location ● = Producing Well ↗ = Injection Well ◇ = Water Supply Well ◆ = Plugged & Abandon Well
⊙ = Found Section Corner, 2 or 3" Iron Pipe & GLO B.C. ○ = Found 1/4 Section Corner, 1" Iron Pipe & GLO B.C.

DRILLING PROGRAM

SDE FEDERAL `31' WELL NO. 1

SURFACE DESCRIPTION:

The land surface in this area is relatively level with moderate sand dunes. Regionally, the land slopes to the West. Vegetation consists mainly of scrub oak, mesquite, and range grasses.

FORMATION TOPS: Estimated KB Elevation: 3569'

<u>Formation</u>	<u>Depth</u>	<u>Lithology</u>	<u>Fluid Content</u>
Rustler	955'	Anhydrite, Salt	----
Salado	1270'	Salt	----
Delaware Mtn Group	4640'	Sandstone, Shale	Oil/Gas
Cherry Canyon	5550'	Sandstone, Shale	Oil/Gas
Brushy Canyon- Pay	7200'	Sandstone, Shale	Oil/Gas
Lower Brushy Canyon- Pay	8240'	Sandstone, Shale	Oil/Gas
Bone Spring	8580'	Limestone	----

The base of the salt section is found around 4390'. No abnormal pressures or temperatures are anticipated to be encountered in this well. H₂S is possible in this well. H₂S RADIUS OF EXPOSURE: 100ppm = 23 feet, 500ppm = 11 feet, based on 800ppm and 115 mcf. (See attached H₂S Drilling Operations Plan. H₂S equipment to be operational prior to drilling out Surface Casing Shoe.)

PRESSURE CONTROL EQUIPMENT:

A 3000 psi Dual Ram type preventer with rotating head will be used. (See Exhibit C). We do not plan to have an annular preventer. We will be able to achieve full closure of the well with the double ram preventer. It will be installed after surface casing is set. BOP will be tested each time it is installed on a casing string and at least every 29 days, and operated at least once each 24-hour period during drilling.

A PVT system will not be installed. We will be drilling thru the reserve pit and will circulate the steel pits one hour each tour to check for gains and losses and will be noted on the driller's log, which is Texaco's policy.

We do not plan to run an automatic remote-controlled choke. We will have installed and tested two manual, H₂S trimmed, chokes.

CASING AND CEMENT PROGRAM:

The casing and cementing programs are detailed on Form 3160-3. All casing will be new.

Centralizer Program:

Surface Casing - Centralize the bottom 3 joints and every 4th to surface.

Intermediate Casing - Centralize the bottom 3 joints.

Production Casing - Centralize bottom 500' every other cplg. and above and below the DV tool.

MUD PROGRAM:

<u>Depth</u>	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>
0'-970'	Fresh Water	8.4	28
970'-4500'	Brine Water	10.0	29
4500'-6500'	Fresh Water	8.4	28
6500'-8700'	FW/Starch	8.4-8.7	29-33

LOGGING, TESTING:

GR-CAL-DSN-SDL and GR-CAL-DISFL surveys will be run.


A two-man Mud Logging Unit will be used from 4400' to 8700'.

No drill stem tests will be conducted.

No cores will be taken.

**DRILLING CONTROL
CONDITION II-B 3000 WP
FOR AIR DRILLING OR
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H₂S TRIM REQUIRED
YES X NO

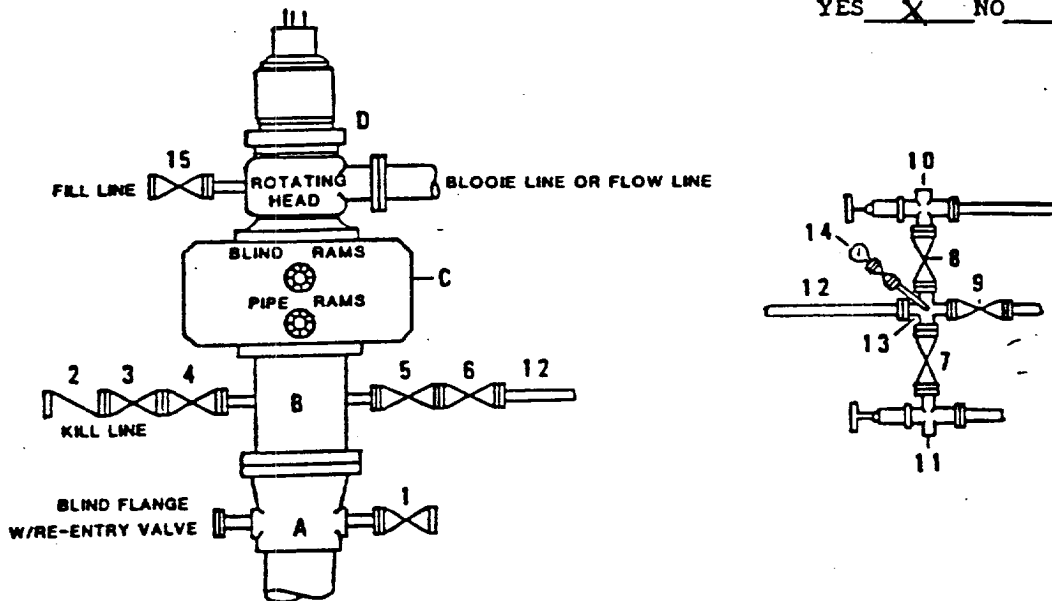

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B

- A Texaco Wellhead
- B 3000# W.P. drilling spool with a 2" minimum flanged outlet for Kill line and 3" minimum flanged outlet for choke line.
- C 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized).
- D Rotating Head with fill up outlet and extended Bloopis Line.
- 1,3,4, 7,8, 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 2 2" minimum 3000# W.P. back pressure valve.
- 5,6,9 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe.
- 13 2" minimum x 3" minimum 3000# W.P. flanged cross.
- 10,11 2" minimum 3000# W.P. adjustable choke bodies.
- 14 Cameron Mud Gauge or equivalent (location optional in choke line).
- 15 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE	DATE	EST. NO.	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT C