DUPLICATE

FORM C-105

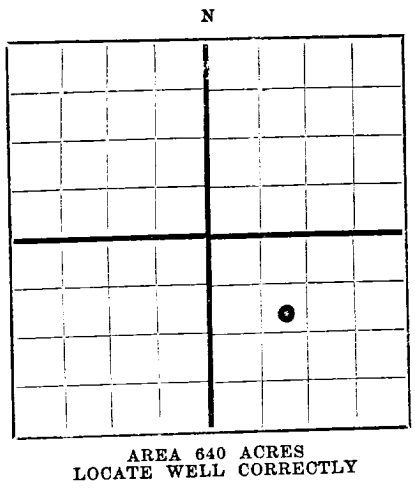

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Oil Well Remedial Service — Company or Operator — P. O. Box 511, Odessa, Texas — Address

Maggie Dunn — Lease — Well No. 3 in NW/4 of SE/4 of Sec. 13, T. 24 S

R. 36 E (5780), N. M. P. M., Langlie Mattix Field, Lea County.

Well is 3630 (650) feet south of the North line and 1650 feet west of the East line of Section 13

If State land the oil and gas lease is No. ..... Assignment No. .....

If patented land the owner is Fowler Heir (Surface), Address Jal, New Mexico

If Government land the permittee is ....., Address .....

The Lessee is ....., Address .....

Drilling commenced 8-15-50 19..... Drilling was completed 9-8-50 19.....

Name of drilling contractor Oil Well Remedial Service, Address Box 511, Odessa, Texas

Elevation above sea level at top of casing 3317 feet.

The information given is to be kept confidential until not confidential 19.....

OIL SANDS OR ZONES

No. 1, from 3035 to 3 055 No. 4, from 3150 to 3160

No. 2, from 3070 to 3090 No. 5, from ..... to .....

No. 3, from 3120 to 3130 No. 6, from ..... to .....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none to ..... feet.

No. 2, from ..... to ..... feet.

No. 3, from ..... to ..... feet.

No. 4, from ..... to ..... feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	PERFORATED TO	PURPOSE
8 5/8	28	8	SH	285	TP				
5½	15.5	8	New	3021	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8	285	100	Halliburton		
8"	5½	3021	400	Halliburton	- 200 sax at bottom - 2 stage tool did not work - perforated and squeezed 200 sax at 1260 feet	

PLUGS AND ADAPTERS

Heaving plug—Material ..... Length ..... Depth Set .....

Adapters — Material ..... Size .....

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NONE				

Results of shooting or chemical treatment .....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to TD feet, and from ..... feet to ..... feet

Cable tools were used from ..... feet to ..... feet, and from ..... feet to ..... feet

PRODUCTION

Put to producing 9-8-50, 19.....

The production of the first 24 hours was 52 barrels of fluid of which 100 % was oil; ..... %

emulsion; ..... % water; and ..... % sediment. Gravity, Be. 36

If gas well, cu. ft. per 24 hours ..... Gallons gasoline per 1,000 cu. ft. of gas .....

Rock pressure, lbs. per sq. in. .....

EMPLOYEES

Oil Well Remedial Service, Driller ....., Driller

....., Driller ....., Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14th day of September, 1950

Notary Public

Eotor County Texas

My Commission expires 6-1-51

Odessa, Texas (Place) 9-14-50 (Date)

Name .....

Position Managing Partner

Representing Oil Well Remedial Service (Company or Operator)

Address Box 511, Odessa, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	150	150	Sand, Caliche, gravel
150	250	100	Shale
250	700	450	Red and grey shale
700	900	200	Red shale
900	1160	260	Red rock
1160	1262	202	Anhydrite
1262	1342	80	Salt
1342	2836	1494	Salt with anhydrite streaks
2836	3000	164	Lime
3000	3035	35	Lime and sand
3035	3055	20	Sand
3055	3070	15	Lime
3070	3090	20	Sand
3090	3120	30	Lime and Shale
3120	3130	10	Sand
3130	3150	20	Lime & Shale
3150	3160	10	Sand
3160	3211	51	Shady lime and shale
3211 - TD			