

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87400
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

WELL API NO. 30-025-04408
5. Indicate Type of Lease STATE ☐ FEE ☐ Fed
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Bay Federal
8. Well Number 3
9. OGRID Number 14372
10. Pool name or Wildcat Eumont Y-Trvrs QN
11. Elevation (Show whether DR, RKB, RT, GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL OR TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator McDonnold Operating Inc.	
3. Address of Operator 505 N. Big Spring Suite 204 Midland Tx 79701	
4. Well Location Unit Letter D : 660 feet from the N line and 660 feet from the W line Section 35 Township 20S Range 36E NMPM Lea County Nm	
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:
REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD 4070'
Perfs 3855'-3969'
TOC 699'
8 5/8" @ 351' w/ 225 sx TOC surf.
5 1/2" @ 4070' TOC 699'
CIBP @ 3800' w/ 35' cmt on top.
Perfs 3087'-3407'

NU 3K BOP
MIRU P&A rig. POOH w/ PKR.
Set CIBP @ 3040'. Spot 25sx plug on top.
Circ hole w/ 12.5#/gal mud laden fluid.
Perf 502 holes @ 400' & fill 5 1/2" & 8 5/8"
CSG w/ cmt.

Accepted for Record Only

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Craig M. McDonnold TITLE **President**

DATE **6-2-11**

Type or print name

Craig M. McDonnold

E-mail address:

PHONE: **432-682-3499**

For State Use Only

APPROVED BY:

TITLE


DATE

Conditions of Approval (if any):

Bay Fed #3

30-025-04408

Wellbore Schematic as of 6/3/11

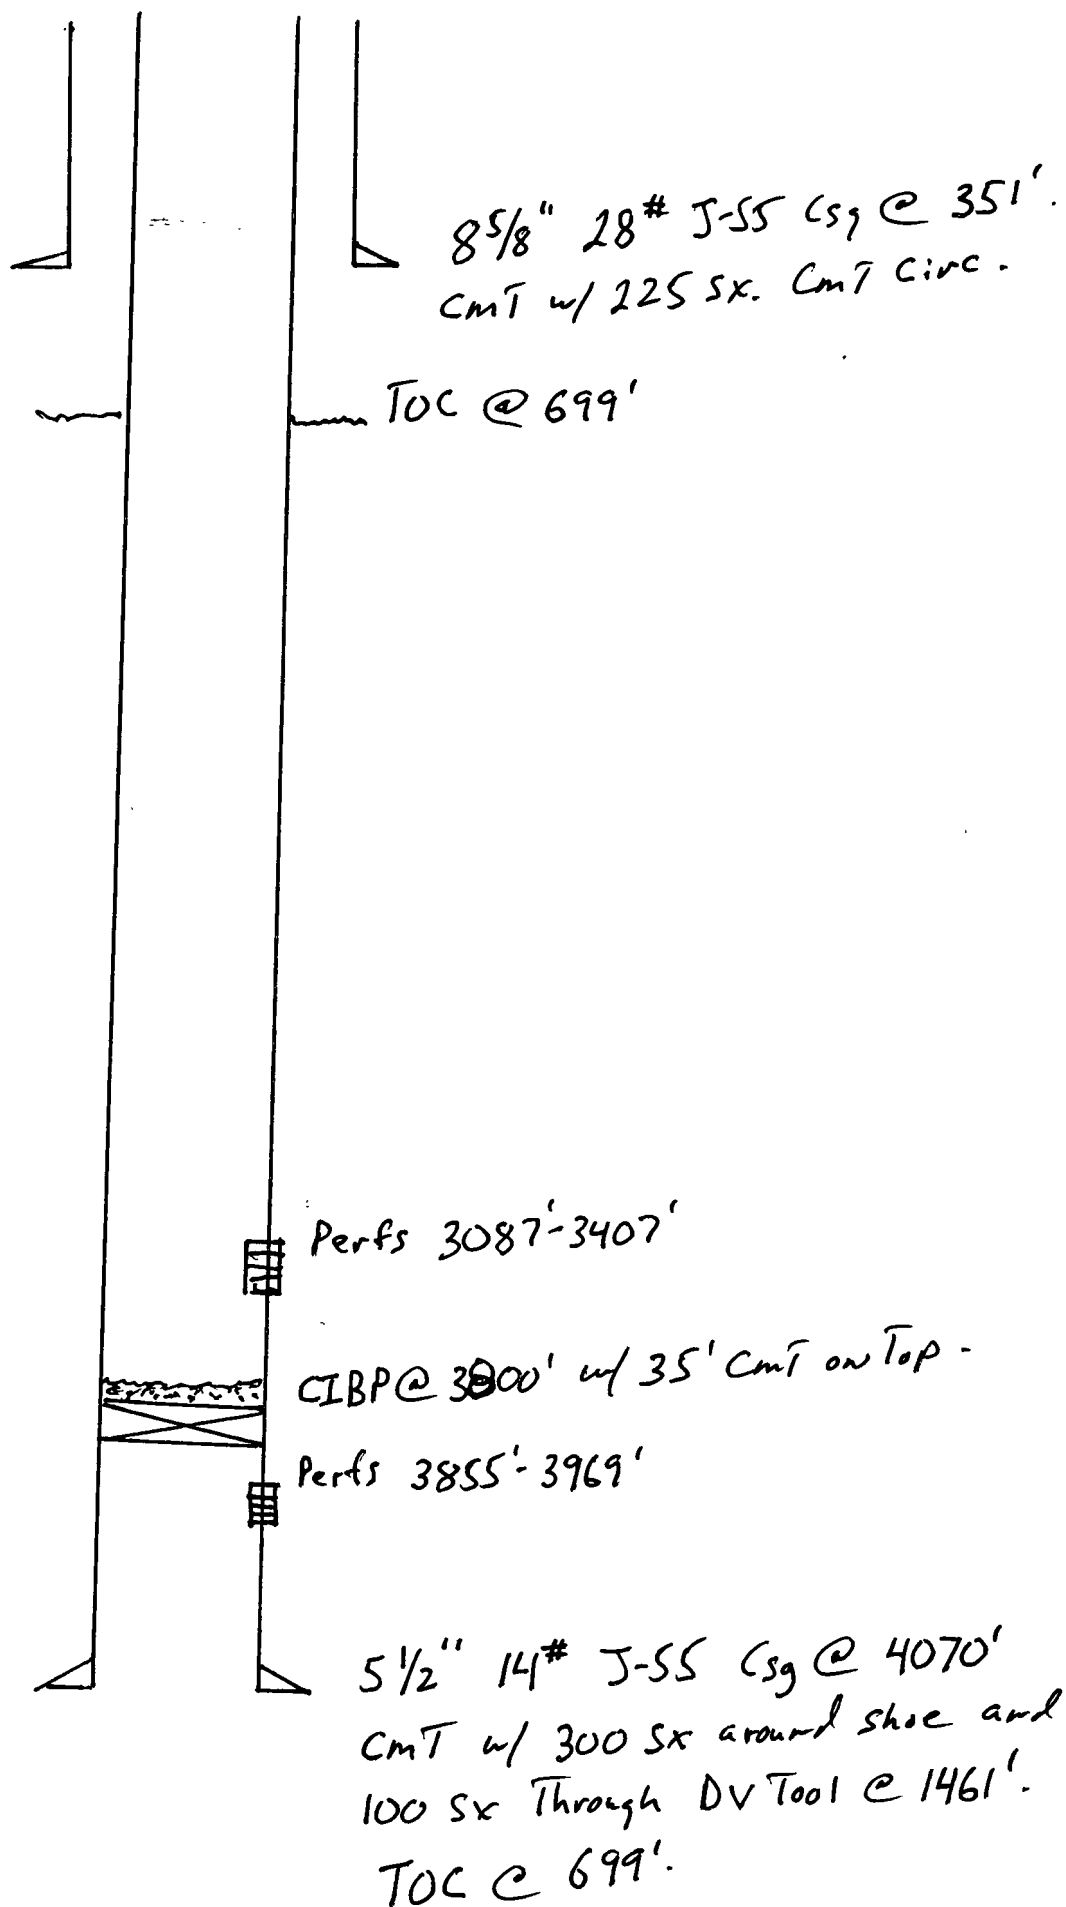

Bay Fed #3

30-025-04408

Proposed P&A.

Perf SQ2 holes @ 400'.
fill 8 5/8" + 5 1/2" CSG w/ cmT.

8 5/8" 28# J-SS CSG @ 351'.
cmT w/ 225 SX. cmT Circ.

TOC @ 699'

CIBP @ 3040'. SpOT 25 SX cmT on Top.

Perfs 3087'-3407'

CIBP @ 3800' w/ 35' cmT on Top.

Perfs 3855'-3969'

5 1/2" 14# J-SS CSG @ 4070'
cmT w/ 300 SX around shoe and
100 SX Through DV Tool @ 1461'.
TOC @ 699'.