

OCD - HOBBS
05/04/2020
RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No.
1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator [229137]		8. Lease Name and Well No. [39912]
3a. Address	3b. Phone No. (include area code)	9. API Well No. 30-025-47171
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		10. Field and Pool, or Exploratory [98094]
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)		12. County or Parish
16. No of acres in lease		13. State
17. Spacing Unit dedicated to this well		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.		
19. Proposed Depth		
20. BLM/BIA Bond No. in file		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)		
22. Approximate date work will start*		
23. Estimated duration		
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 05/04/2020
C-102 Rec 05/12/2020

SL

(Continued on page 2)

APPROVED WITH CONDITIONS
Approval Date: 04/30/2020

Kz
05/13/2020

*(Instructions on page 2)

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NENW / 220 FNL / 2010 FWL / TWSP: 26S / RANGE: 34E / SECTION: 5 / LAT: 32.07913 / LONG: -103.49398 (TVD: 0 feet, MD: 0 feet)

PPP: NENW / 100 FNL / 2310 FWL / TWSP: 26S / RANGE: 34E / SECTION: 5 / LAT: 32.079461 / LONG: -103.493012 (TVD: 12767 feet, MD: 12827 feet)

BHL: SESW / 50 FSL / 2310 FWL / TWSP: 26S / RANGE: 34E / SECTION: 8 / LAT: 32.050834 / LONG: -103.492989 (TVD: 12946 feet, MD: 23138 feet)

BLM Point of Contact

Name: Deborah Ham

Title: Legal Landlaw Examiner

Phone: (575) 234-5965

Email: dham@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

PECOS DISTRICT DRILLING OPERATIONS CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG Operating LLC
LEASE NO.:	NMNM124664
WELL NAME & NO.:	Gunner 8 Federal Com 703H
SURFACE HOLE FOOTAGE:	220' FNL & 2010' FWL
BOTTOM HOLE FOOTAGE:	50' FSL & 2310' FWL
LOCATION:	Section 5, T 26S, R 34E, NMPM
COUNTY:	Lea County, New Mexico

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

1. A Hydrogen Sulfide (H2S) Drilling Plan shall be activated **500 feet** prior to drilling into the **Wolfcamp** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4"** surface casing shall be set at approximately **1000'** (a minimum of 25' into the Rustler Anhydrite and above the salt) and cemented to surface.
 - a. **If cement does not circulate to surface**, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of **6 hours** after pumping cement, ideally between 8-10 hours after.
 - b. WOC time for a primary cement job will be a minimum of **8 hours** or **500 psi** compressive strength, whichever is greater. This is to include the lead cement.
 - c. If cement falls back, remedial cementing will be done prior to drilling out the shoe.
 - d. WOC time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 psi compressive strength, whichever is greater.

2. The **7-5/8"** intermediate casing shall be set cemented to surface.
 - a. **If cement does not circulate to surface**, see B.1.a, c & d.
3. The **5-1/2"** production casing shall be cemented with at least **500' tie-back** into the previous casing due to limited clearance within the intermediate string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **10,000 (10M) psi. Variance approved to use a 5M annular. This annular must be tested to 70% of its rated pressure (5000 psi)**.
3. High formation pressures anticipated while drilling through the Wolfcamp in this area. If heavier mud is needed, additional approval is not necessary as this well already requires a 10M BOP system.

D. SPECIAL REQUIREMENTS

1. Submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
 - a. The well sign on location shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

DR 4/24/2020

GENERAL REQUIREMENTS

1. The BLM is to be notified in advance for a representative to witness:
 - a. Spudding the well (minimum of 24 hours)
 - b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
 - c. BOP/BOPE tests (minimum of 4 hours)
 - ☒ Eddy County: Call the Carlsbad Field Office, (575) 361-2822
 - ☒ Lea County: Call the Hobbs Field Station, (575) 393-3612
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig:
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be available upon request. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the

following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well-specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On the portion of well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. If the operator has proposed a multi-bowl wellhead assembly in the APD, it must meet or exceed the pressure rating of the BOP system. Additionally, the following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in Onshore Order 2 III.A.2.i must be followed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the BOP/BOPE tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test which can be initiated immediately after bumping the plug (only applies to single-stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug. The results of the test shall be made available upon request.
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - e. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes. This test shall be performed prior

to the test at full stack pressure.

- f. BOP/BOPE must be tested within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

1. Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

1. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.
2. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

COG Operating, LLC - Gunner 8 Federal Com 703H

1. Geologic Formations

TVD of target	12,946' EOL	Pilot hole depth	NA
MD at TD:	23,138'	Deepest expected fresh water:	220'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	841	Water	
Top of Salt	1207	Salt	
Base of Salt	5048	Salt	
Lamar	5282	Salt Water	
Bell Canyon	5308	Salt Water	
Cherry Canyon	6369	Oil/Gas	
Brushy Canyon	7997	Oil/Gas	
Bone Spring Lime	9506	Oil/Gas	
1st Bone Spring Sand	10468	Oil/Gas	
2nd Bone Spring Sand	11071	Oil/Gas	
3rd Bone Spring Sand	12099	Oil/Gas	
Wolfcamp	12579	Oil/Gas	
Wolfcamp A Shale	12756	Target Oil/Gas	
Wolfcamp B	13056	Not Penetrated	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Coll	SF Burst	SF Body	SF Joint
	From	To								
14.75"	0'	1,000'	10.750"	45.50	L80	BTC	5.40	1.17	22.86	23.36
9.875"	0'	8,500'	7.625"	29.70	L80 HP	BTC	1.55	1.03	2.05	2.07
8.750"	8,500'	11,900'	7.625"	29.70	P110 HC	TL-FJ	1.25	1.06	9.31	6.52
6.75"	0'	11,700'	5.500"	23.00	P110 HC	CDC-HTQ	2.01	2.04	2.48	2.58
6.75"	11,700'	23,138'	5.500"	23.00	P110 CY	TL Wedge	1.73	2.04	28.91	28.15
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse.

Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

Production casing weight calculated through mid-point of curve.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h.

The 5" casing will be run back 200' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

COG Operating, LLC - Gunner 8 Federal Com 703H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary?	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

COG Operating, LLC - Gunner 8 Federal Com 703H

3. Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft3/ sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	350	13.5	1.73	9.21	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	315	14.8	1.35	6.52	8	Tail: Class C + 1% CaCl ₂
Int	820	10.3	3.49	21.55	-	Halliburton NeoCem w/ 2# kolseal & 3% HGS 4000
	260	16.4	1.08	4.51	11	Tail: Class H + additives
Prod	610	12.7	1.98	10.84	72	Lead: Halliburton EconoCem + additives
	940	14.5	1.22	5.56	19	Tail: Halliburton VersaCem + additives

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	78%
1 st Intermediate	0'	42%
Production	0'	22.5% in Lateral OH, 9% csg x csg

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	---

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
9-7/8"	13-5/8"	5M	Annular	x	2500psi
			Blind Ram	x	5000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		
6-3/4"	13-5/8"	10M	5M Annular	x	5000psi
			Blind Ram	x	10000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. N Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Brine Diesel Emulsion	8.4 - 9.1	28-34	N/C
7-5/8" Int shoe	Lateral TD	OBM	9.6 - 12.5	35-45	<20

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
N	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	8415 psi at 12946' TVD
Abnormal Temperature	NO 185 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other Facets of Operation

Y	Is it a walking operation?
Y	Is casing pre-set?

x	H ₂ S Plan.
x	BOP & Choke Schematics.
x	Directional Plan



Concho Resources, Inc.

**Lea County, NM (NAD 27 NME)
(Gunner 8 Federal) Sec-5_T-26-S_R-34-E
Gunner 8 Federal Com #703H**

OWB

Plan: Plan #1

Standard Planning Report

18 December, 2019



Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Project	Lea County, NM (NAD 27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E		
Site Position:		Northing:	393,478.40 usft
From:	Map	Easting:	760,090.20 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 4' 44.418 N
		Longitude:	103° 29' 36.998 W
		Grid Convergence:	0.45 °

Well	Gunner 8 Federal Com #703H		
Well Position	+N/-S	0.2 usft	Northing: 393,478.60 usft
	+E/-W	30.0 usft	Easting: 760,120.20 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	Latitude: 32° 4' 44.418 N
			Longitude: 103° 29' 36.650 W
			Ground Level: 3,339.7 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	2019/12/17	6.63	59.91	47,603.89542710

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	177.85

Plan Survey Tool Program	Date	2019/12/18		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	12,340.0 Plan #1 (OWB)	Standard Keeper 104	
			Standard Wireline Keeper v	
2	12,340.0	23,137.9 Plan #1 (OWB)	MWD+IFR1+FDIR	
			OWSG MWD + IFR1 + FDIF	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,636.0	2.72	59.00	5,635.9	1.7	2.8	2.00	2.00	0.00	59.00	
12,340.3	2.72	59.00	12,332.7	165.5	275.5	0.00	0.00	0.00	0.00	
13,252.5	89.84	179.52	12,919.0	-405.5	304.2	10.00	9.55	13.21	120.50	
23,138.3	89.84	179.52	12,946.0	-10,290.9	386.6	0.00	0.00	0.00	0.00	PBHL (Gunner 8 Fe

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
848.0	0.00	0.00	848.0	0.0	0.0	0.0	0.00	0.00	0.00
Rustler									
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,206.0	0.00	0.00	1,206.0	0.0	0.0	0.0	0.00	0.00	0.00
TOS									
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,040.0	0.00	0.00	5,040.0	0.0	0.0	0.0	0.00	0.00	0.00
BOS									
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00
5,278.0	0.00	0.00	5,278.0	0.0	0.0	0.0	0.00	0.00	0.00
LMAR (Top Delaware)									
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00
5,304.0	0.00	0.00	5,304.0	0.0	0.0	0.0	0.00	0.00	0.00
BLCN									
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
NUDGE - Build 2.00									
5,600.0	2.00	59.00	5,600.0	0.9	1.5	-0.8	2.00	2.00	0.00
5,636.0	2.72	59.00	5,635.9	1.7	2.8	-1.6	2.00	2.00	0.00
HOLD - 6704.3 at 5636.0 MD									
5,700.0	2.72	59.00	5,699.9	3.2	5.4	-3.0	0.00	0.00	0.00
5,800.0	2.72	59.00	5,799.8	5.7	9.4	-5.3	0.00	0.00	0.00
5,900.0	2.72	59.00	5,899.7	8.1	13.5	-7.6	0.00	0.00	0.00
6,000.0	2.72	59.00	5,999.5	10.6	17.6	-9.9	0.00	0.00	0.00
6,100.0	2.72	59.00	6,099.4	13.0	21.6	-12.2	0.00	0.00	0.00
6,200.0	2.72	59.00	6,199.3	15.4	25.7	-14.5	0.00	0.00	0.00
6,300.0	2.72	59.00	6,299.2	17.9	29.8	-16.8	0.00	0.00	0.00
6,365.9	2.72	59.00	6,365.0	19.5	32.5	-18.3	0.00	0.00	0.00
CYCN									
6,400.0	2.72	59.00	6,399.1	20.3	33.8	-19.1	0.00	0.00	0.00
6,500.0	2.72	59.00	6,499.0	22.8	37.9	-21.3	0.00	0.00	0.00
6,600.0	2.72	59.00	6,598.9	25.2	42.0	-23.6	0.00	0.00	0.00
6,700.0	2.72	59.00	6,698.8	27.7	46.0	-25.9	0.00	0.00	0.00
6,800.0	2.72	59.00	6,798.6	30.1	50.1	-28.2	0.00	0.00	0.00
6,900.0	2.72	59.00	6,898.5	32.6	54.2	-30.5	0.00	0.00	0.00
7,000.0	2.72	59.00	6,998.4	35.0	58.2	-32.8	0.00	0.00	0.00
7,100.0	2.72	59.00	7,098.3	37.4	62.3	-35.1	0.00	0.00	0.00
7,200.0	2.72	59.00	7,198.2	39.9	66.4	-37.4	0.00	0.00	0.00
7,300.0	2.72	59.00	7,298.1	42.3	70.5	-39.7	0.00	0.00	0.00
7,400.0	2.72	59.00	7,398.0	44.8	74.5	-41.9	0.00	0.00	0.00
7,500.0	2.72	59.00	7,497.8	47.2	78.6	-44.2	0.00	0.00	0.00
7,600.0	2.72	59.00	7,597.7	49.7	82.7	-46.5	0.00	0.00	0.00
7,700.0	2.72	59.00	7,697.6	52.1	86.7	-48.8	0.00	0.00	0.00
7,800.0	2.72	59.00	7,797.5	54.6	90.8	-51.1	0.00	0.00	0.00
7,900.0	2.72	59.00	7,897.4	57.0	94.9	-53.4	0.00	0.00	0.00
7,995.7	2.72	59.00	7,993.0	59.3	98.8	-55.6	0.00	0.00	0.00
BYCN									
8,000.0	2.72	59.00	7,997.3	59.4	98.9	-55.7	0.00	0.00	0.00
8,100.0	2.72	59.00	8,097.2	61.9	103.0	-58.0	0.00	0.00	0.00
8,200.0	2.72	59.00	8,197.1	64.3	107.1	-60.3	0.00	0.00	0.00
8,300.0	2.72	59.00	8,296.9	66.8	111.1	-62.6	0.00	0.00	0.00
8,400.0	2.72	59.00	8,396.8	69.2	115.2	-64.8	0.00	0.00	0.00
8,500.0	2.72	59.00	8,496.7	71.7	119.3	-67.1	0.00	0.00	0.00
8,600.0	2.72	59.00	8,596.6	74.1	123.3	-69.4	0.00	0.00	0.00
8,700.0	2.72	59.00	8,696.5	76.6	127.4	-71.7	0.00	0.00	0.00
8,800.0	2.72	59.00	8,796.4	79.0	131.5	-74.0	0.00	0.00	0.00

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,900.0	2.72	59.00	8,896.3	81.4	135.5	-76.3	0.00	0.00	0.00
9,000.0	2.72	59.00	8,996.2	83.9	139.6	-78.6	0.00	0.00	0.00
9,100.0	2.72	59.00	9,096.0	86.3	143.7	-80.9	0.00	0.00	0.00
9,200.0	2.72	59.00	9,195.9	88.8	147.7	-83.2	0.00	0.00	0.00
9,300.0	2.72	59.00	9,295.8	91.2	151.8	-85.5	0.00	0.00	0.00
9,400.0	2.72	59.00	9,395.7	93.7	155.9	-87.7	0.00	0.00	0.00
9,500.0	2.72	59.00	9,495.6	96.1	159.9	-90.0	0.00	0.00	0.00
9,506.4	2.72	59.00	9,502.0	96.3	160.2	-90.2	0.00	0.00	0.00
Bone Sprg (BSGL)									
9,600.0	2.72	59.00	9,595.5	98.5	164.0	-92.3	0.00	0.00	0.00
9,700.0	2.72	59.00	9,695.4	101.0	168.1	-94.6	0.00	0.00	0.00
9,800.0	2.72	59.00	9,795.3	103.4	172.1	-96.9	0.00	0.00	0.00
9,900.0	2.72	59.00	9,895.1	105.9	176.2	-99.2	0.00	0.00	0.00
10,000.0	2.72	59.00	9,995.0	108.3	180.3	-101.5	0.00	0.00	0.00
10,100.0	2.72	59.00	10,094.9	110.8	184.3	-103.8	0.00	0.00	0.00
10,200.0	2.72	59.00	10,194.8	113.2	188.4	-106.1	0.00	0.00	0.00
10,300.0	2.72	59.00	10,294.7	115.7	192.5	-108.3	0.00	0.00	0.00
10,400.0	2.72	59.00	10,394.6	118.1	196.6	-110.6	0.00	0.00	0.00
10,464.5	2.72	59.00	10,459.0	119.7	199.2	-112.1	0.00	0.00	0.00
FBSG_sand									
10,500.0	2.72	59.00	10,494.5	120.5	200.6	-112.9	0.00	0.00	0.00
10,600.0	2.72	59.00	10,594.4	123.0	204.7	-115.2	0.00	0.00	0.00
10,700.0	2.72	59.00	10,694.2	125.4	208.8	-117.5	0.00	0.00	0.00
10,800.0	2.72	59.00	10,794.1	127.9	212.8	-119.8	0.00	0.00	0.00
10,900.0	2.72	59.00	10,894.0	130.3	216.9	-122.1	0.00	0.00	0.00
11,000.0	2.72	59.00	10,993.9	132.8	221.0	-124.4	0.00	0.00	0.00
11,072.2	2.72	59.00	11,066.0	134.5	223.9	-126.0	0.00	0.00	0.00
SBSG_sand									
11,100.0	2.72	59.00	11,093.8	135.2	225.0	-126.7	0.00	0.00	0.00
11,200.0	2.72	59.00	11,193.7	137.7	229.1	-129.0	0.00	0.00	0.00
11,300.0	2.72	59.00	11,293.6	140.1	233.2	-131.2	0.00	0.00	0.00
11,400.0	2.72	59.00	11,393.5	142.5	237.2	-133.5	0.00	0.00	0.00
11,483.6	2.72	59.00	11,477.0	144.6	240.6	-135.5	0.00	0.00	0.00
SBSG_sand_Base									
11,500.0	2.72	59.00	11,493.3	145.0	241.3	-135.8	0.00	0.00	0.00
11,600.0	2.72	59.00	11,593.2	147.4	245.4	-138.1	0.00	0.00	0.00
11,700.0	2.72	59.00	11,693.1	149.9	249.4	-140.4	0.00	0.00	0.00
11,800.0	2.72	59.00	11,793.0	152.3	253.5	-142.7	0.00	0.00	0.00
11,900.0	2.72	59.00	11,892.9	154.8	257.6	-145.0	0.00	0.00	0.00
12,000.0	2.72	59.00	11,992.8	157.2	261.6	-147.3	0.00	0.00	0.00
12,097.3	2.72	59.00	12,090.0	159.6	265.6	-149.5	0.00	0.00	0.00
TBSG_sand									
12,100.0	2.72	59.00	12,092.7	159.7	265.7	-149.6	0.00	0.00	0.00
12,200.0	2.72	59.00	12,192.6	162.1	269.8	-151.9	0.00	0.00	0.00
12,300.0	2.72	59.00	12,292.4	164.5	273.8	-154.1	0.00	0.00	0.00
12,340.3	2.72	59.00	12,332.7	165.5	275.5	-155.1	0.00	0.00	0.00
KOP - DLS 10.00 TFO 120.50									
12,350.0	2.38	79.57	12,342.4	165.7	275.9	-155.2	10.00	-3.51	212.07
12,400.0	5.15	152.53	12,392.3	163.9	277.9	-153.3	10.00	5.54	145.92
12,450.0	9.87	165.92	12,441.9	157.7	280.0	-147.1	10.00	9.43	26.78
12,500.0	14.77	170.60	12,490.7	147.3	282.1	-136.6	10.00	9.81	9.36
12,550.0	19.72	172.97	12,538.4	132.6	284.2	-121.8	10.00	9.90	4.75
12,587.2	23.42	174.11	12,573.0	119.0	285.7	-108.2	10.00	9.94	3.05

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
WFMP									
12,600.0	24.69	174.42	12,584.7	113.8	286.2	-103.0	10.00	9.95	2.46
12,650.0	29.67	175.41	12,629.2	91.1	288.2	-80.2	10.00	9.96	1.97
12,700.0	34.66	176.14	12,671.5	64.5	290.2	-53.6	10.00	9.97	1.45
12,750.0	39.65	176.70	12,711.3	34.4	292.1	-23.4	10.00	9.98	1.13
12,798.1	44.44	177.14	12,747.0	2.3	293.8	8.8	10.00	9.98	0.91
WFMP A SHALE									
12,800.0	44.64	177.15	12,748.4	0.9	293.8	10.1	10.00	9.98	0.83
12,850.0	49.63	177.53	12,782.4	-35.7	295.5	46.7	10.00	9.98	0.76
12,900.0	54.62	177.86	12,813.1	-75.1	297.1	86.2	10.00	9.99	0.66
12,950.0	59.62	178.15	12,840.2	-117.1	298.6	128.2	10.00	9.99	0.58
13,000.0	64.61	178.42	12,863.6	-161.2	299.9	172.4	10.00	9.99	0.52
13,050.0	69.61	178.66	12,883.0	-207.2	301.1	218.4	10.00	9.99	0.48
13,100.0	74.60	178.88	12,898.4	-254.8	302.1	266.0	10.00	9.99	0.45
13,150.0	79.60	179.10	12,909.5	-303.5	302.9	314.7	10.00	9.99	0.43
13,200.0	84.59	179.31	12,916.4	-353.0	303.6	364.2	10.00	9.99	0.42
13,252.5	89.84	179.52	12,919.0	-405.5	304.2	416.6	10.00	9.99	0.41
EOC - 9885.8 hold at 13252.5 MD									
13,300.0	89.84	179.52	12,919.1	-452.9	304.6	464.1	0.00	0.00	0.00
13,400.0	89.84	179.52	12,919.4	-552.9	305.4	564.0	0.00	0.00	0.00
13,500.0	89.84	179.52	12,919.6	-652.9	306.2	664.0	0.00	0.00	0.00
13,600.0	89.84	179.52	12,919.9	-752.9	307.1	763.9	0.00	0.00	0.00
13,700.0	89.84	179.52	12,920.2	-852.9	307.9	863.9	0.00	0.00	0.00
13,800.0	89.84	179.52	12,920.5	-952.9	308.7	963.8	0.00	0.00	0.00
13,900.0	89.84	179.52	12,920.7	-1,052.9	309.6	1,063.8	0.00	0.00	0.00
14,000.0	89.84	179.52	12,921.0	-1,152.9	310.4	1,163.7	0.00	0.00	0.00
14,100.0	89.84	179.52	12,921.3	-1,252.9	311.2	1,263.7	0.00	0.00	0.00
14,200.0	89.84	179.52	12,921.6	-1,352.9	312.1	1,363.7	0.00	0.00	0.00
14,300.0	89.84	179.52	12,921.8	-1,452.9	312.9	1,463.6	0.00	0.00	0.00
14,400.0	89.84	179.52	12,922.1	-1,552.9	313.7	1,563.6	0.00	0.00	0.00
14,500.0	89.84	179.52	12,922.4	-1,652.9	314.6	1,663.5	0.00	0.00	0.00
14,600.0	89.84	179.52	12,922.7	-1,752.9	315.4	1,763.5	0.00	0.00	0.00
14,700.0	89.84	179.52	12,922.9	-1,852.9	316.2	1,863.4	0.00	0.00	0.00
14,800.0	89.84	179.52	12,923.2	-1,952.9	317.1	1,963.4	0.00	0.00	0.00
14,900.0	89.84	179.52	12,923.5	-2,052.9	317.9	2,063.4	0.00	0.00	0.00
15,000.0	89.84	179.52	12,923.7	-2,152.9	318.7	2,163.3	0.00	0.00	0.00
15,100.0	89.84	179.52	12,924.0	-2,252.9	319.6	2,263.3	0.00	0.00	0.00
15,200.0	89.84	179.52	12,924.3	-2,352.9	320.4	2,363.2	0.00	0.00	0.00
15,300.0	89.84	179.52	12,924.6	-2,452.9	321.2	2,463.2	0.00	0.00	0.00
15,400.0	89.84	179.52	12,924.8	-2,552.9	322.1	2,563.1	0.00	0.00	0.00
15,500.0	89.84	179.52	12,925.1	-2,652.9	322.9	2,663.1	0.00	0.00	0.00
15,600.0	89.84	179.52	12,925.4	-2,752.8	323.7	2,763.1	0.00	0.00	0.00
15,700.0	89.84	179.52	12,925.7	-2,852.8	324.6	2,863.0	0.00	0.00	0.00
15,800.0	89.84	179.52	12,925.9	-2,952.8	325.4	2,963.0	0.00	0.00	0.00
15,900.0	89.84	179.52	12,926.2	-3,052.8	326.2	3,062.9	0.00	0.00	0.00
16,000.0	89.84	179.52	12,926.5	-3,152.8	327.1	3,162.9	0.00	0.00	0.00
16,100.0	89.84	179.52	12,926.8	-3,252.8	327.9	3,262.8	0.00	0.00	0.00
16,200.0	89.84	179.52	12,927.0	-3,352.8	328.7	3,362.8	0.00	0.00	0.00
16,300.0	89.84	179.52	12,927.3	-3,452.8	329.6	3,462.8	0.00	0.00	0.00
16,400.0	89.84	179.52	12,927.6	-3,552.8	330.4	3,562.7	0.00	0.00	0.00
16,500.0	89.84	179.52	12,927.9	-3,652.8	331.2	3,662.7	0.00	0.00	0.00
16,600.0	89.84	179.52	12,928.1	-3,752.8	332.1	3,762.6	0.00	0.00	0.00
16,700.0	89.84	179.52	12,928.4	-3,852.8	332.9	3,862.6	0.00	0.00	0.00

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,800.0	89.84	179.52	12,928.7	-3,952.8	333.7	3,962.5	0.00	0.00	0.00
16,900.0	89.84	179.52	12,928.9	-4,052.8	334.6	4,062.5	0.00	0.00	0.00
17,000.0	89.84	179.52	12,929.2	-4,152.8	335.4	4,162.5	0.00	0.00	0.00
17,100.0	89.84	179.52	12,929.5	-4,252.8	336.2	4,262.4	0.00	0.00	0.00
17,200.0	89.84	179.52	12,929.8	-4,352.8	337.1	4,362.4	0.00	0.00	0.00
17,300.0	89.84	179.52	12,930.0	-4,452.8	337.9	4,462.3	0.00	0.00	0.00
17,400.0	89.84	179.52	12,930.3	-4,552.8	338.8	4,562.3	0.00	0.00	0.00
17,500.0	89.84	179.52	12,930.6	-4,652.8	339.6	4,662.2	0.00	0.00	0.00
17,600.0	89.84	179.52	12,930.9	-4,752.8	340.4	4,762.2	0.00	0.00	0.00
17,700.0	89.84	179.52	12,931.1	-4,852.8	341.3	4,862.2	0.00	0.00	0.00
17,800.0	89.84	179.52	12,931.4	-4,952.8	342.1	4,962.1	0.00	0.00	0.00
17,900.0	89.84	179.52	12,931.7	-5,052.8	342.9	5,062.1	0.00	0.00	0.00
18,000.0	89.84	179.52	12,932.0	-5,152.8	343.8	5,162.0	0.00	0.00	0.00
18,100.0	89.84	179.52	12,932.2	-5,252.8	344.6	5,262.0	0.00	0.00	0.00
18,200.0	89.84	179.52	12,932.5	-5,352.7	345.4	5,361.9	0.00	0.00	0.00
18,300.0	89.84	179.52	12,932.8	-5,452.7	346.3	5,461.9	0.00	0.00	0.00
18,400.0	89.84	179.52	12,933.0	-5,552.7	347.1	5,561.9	0.00	0.00	0.00
18,500.0	89.84	179.52	12,933.3	-5,652.7	347.9	5,661.8	0.00	0.00	0.00
18,600.0	89.84	179.52	12,933.6	-5,752.7	348.8	5,761.8	0.00	0.00	0.00
18,700.0	89.84	179.52	12,933.9	-5,852.7	349.6	5,861.7	0.00	0.00	0.00
18,800.0	89.84	179.52	12,934.1	-5,952.7	350.4	5,961.7	0.00	0.00	0.00
18,900.0	89.84	179.52	12,934.4	-6,052.7	351.3	6,061.6	0.00	0.00	0.00
19,000.0	89.84	179.52	12,934.7	-6,152.7	352.1	6,161.6	0.00	0.00	0.00
19,100.0	89.84	179.52	12,935.0	-6,252.7	352.9	6,261.6	0.00	0.00	0.00
19,200.0	89.84	179.52	12,935.2	-6,352.7	353.8	6,361.5	0.00	0.00	0.00
19,300.0	89.84	179.52	12,935.5	-6,452.7	354.6	6,461.5	0.00	0.00	0.00
19,400.0	89.84	179.52	12,935.8	-6,552.7	355.4	6,561.4	0.00	0.00	0.00
19,500.0	89.84	179.52	12,936.1	-6,652.7	356.3	6,661.4	0.00	0.00	0.00
19,600.0	89.84	179.52	12,936.3	-6,752.7	357.1	6,761.3	0.00	0.00	0.00
19,700.0	89.84	179.52	12,936.6	-6,852.7	357.9	6,861.3	0.00	0.00	0.00
19,800.0	89.84	179.52	12,936.9	-6,952.7	358.8	6,961.3	0.00	0.00	0.00
19,900.0	89.84	179.52	12,937.1	-7,052.7	359.6	7,061.2	0.00	0.00	0.00
20,000.0	89.84	179.52	12,937.4	-7,152.7	360.4	7,161.2	0.00	0.00	0.00
20,100.0	89.84	179.52	12,937.7	-7,252.7	361.3	7,261.1	0.00	0.00	0.00
20,200.0	89.84	179.52	12,938.0	-7,352.7	362.1	7,361.1	0.00	0.00	0.00
20,300.0	89.84	179.52	12,938.2	-7,452.7	362.9	7,461.0	0.00	0.00	0.00
20,400.0	89.84	179.52	12,938.5	-7,552.7	363.8	7,561.0	0.00	0.00	0.00
20,500.0	89.84	179.52	12,938.8	-7,652.7	364.6	7,661.0	0.00	0.00	0.00
20,600.0	89.84	179.52	12,939.1	-7,752.7	365.4	7,760.9	0.00	0.00	0.00
20,700.0	89.84	179.52	12,939.3	-7,852.7	366.3	7,860.9	0.00	0.00	0.00
20,800.0	89.84	179.52	12,939.6	-7,952.6	367.1	7,960.8	0.00	0.00	0.00
20,900.0	89.84	179.52	12,939.9	-8,052.6	367.9	8,060.8	0.00	0.00	0.00
21,000.0	89.84	179.52	12,940.2	-8,152.6	368.8	8,160.7	0.00	0.00	0.00
21,100.0	89.84	179.52	12,940.4	-8,252.6	369.6	8,260.7	0.00	0.00	0.00
21,200.0	89.84	179.52	12,940.7	-8,352.6	370.4	8,360.7	0.00	0.00	0.00
21,300.0	89.84	179.52	12,941.0	-8,452.6	371.3	8,460.6	0.00	0.00	0.00
21,400.0	89.84	179.52	12,941.2	-8,552.6	372.1	8,560.6	0.00	0.00	0.00
21,500.0	89.84	179.52	12,941.5	-8,652.6	372.9	8,660.5	0.00	0.00	0.00
21,600.0	89.84	179.52	12,941.8	-8,752.6	373.8	8,760.5	0.00	0.00	0.00
21,700.0	89.84	179.52	12,942.1	-8,852.6	374.6	8,860.4	0.00	0.00	0.00
21,800.0	89.84	179.52	12,942.3	-8,952.6	375.4	8,960.4	0.00	0.00	0.00
21,900.0	89.84	179.52	12,942.6	-9,052.6	376.3	9,060.3	0.00	0.00	0.00
22,000.0	89.84	179.52	12,942.9	-9,152.6	377.1	9,160.3	0.00	0.00	0.00
22,100.0	89.84	179.52	12,943.2	-9,252.6	377.9	9,260.3	0.00	0.00	0.00

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
22,200.0	89.84	179.52	12,943.4	-9,352.6	378.8	9,360.2	0.00	0.00	0.00	
22,300.0	89.84	179.52	12,943.7	-9,452.6	379.6	9,460.2	0.00	0.00	0.00	
22,400.0	89.84	179.52	12,944.0	-9,552.6	380.4	9,560.1	0.00	0.00	0.00	
22,500.0	89.84	179.52	12,944.3	-9,652.6	381.3	9,660.1	0.00	0.00	0.00	
22,600.0	89.84	179.52	12,944.5	-9,752.6	382.1	9,760.0	0.00	0.00	0.00	
22,700.0	89.84	179.52	12,944.8	-9,852.6	382.9	9,860.0	0.00	0.00	0.00	
22,800.0	89.84	179.52	12,945.1	-9,952.6	383.8	9,960.0	0.00	0.00	0.00	
22,900.0	89.84	179.52	12,945.3	-10,052.6	384.6	10,059.9	0.00	0.00	0.00	
23,000.0	89.84	179.52	12,945.6	-10,152.6	385.4	10,159.9	0.00	0.00	0.00	
23,100.0	89.84	179.52	12,945.9	-10,252.6	386.3	10,259.8	0.00	0.00	0.00	
23,138.3	89.84	179.52	12,946.0	-10,290.9	386.6	10,298.2	0.00	0.00	0.00	
TD at 23138.3										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
FTP (Gunner 8 Feder: - hit/miss target - Shape - Point	0.00	0.00	12,919.0	122.7	299.0	393,601.30	760,419.20	32° 4' 45.609 N	103° 29' 33.164 W	- plan misses target center by 207.4usft at 12827.1usft MD (12767.2 TVD, -18.5 N, 294.8 E)
PBHL (Gunner 8 Fedε - plan hits target center - Rectangle (sides W60.0 H10,414.0 D30.0)	0.16	179.52	12,946.0	-10,290.9	386.6	383,187.70	760,506.80	32° 3' 2.554 N	103° 29' 33.089 W	
LTP (Gunner 8 Feder: - plan misses target center by 0.1usft at 23088.3usft MD (12945.9 TVD, -10240.9 N, 386.2 E) - Point	0.00	0.00	12,946.0	-10,240.9	386.2	383,237.70	760,506.40	32° 3' 3.049 N	103° 29' 33.089 W	



Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
848.0	848.0	Rustler				
1,206.0	1,206.0	TOS				
5,040.0	5,040.0	BOS				
5,278.0	5,278.0	LMAR (Top Delaware)				
5,304.0	5,304.0	BLCN				
6,365.9	6,365.0	CYCN				
7,995.7	7,993.0	BYCN				
9,506.4	9,502.0	Bone Sprg (BSGL)				
10,464.5	10,459.0	FBSG_sand				
11,072.2	11,066.0	SBSG_sand				
11,483.6	11,477.0	SBSG_sand_Base				
12,097.3	12,090.0	TBSG_sand				
12,587.2	12,573.0	WFMP				
12,798.1	12,747.0	WFMP A SHALE				

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well Gunner 8 Federal Com #703H
Company:	Concho Resources, Inc.	TVD Reference:	KB @ 3370.7usft (Precision 106)
Project:	Lea County, NM (NAD 27 NME)	MD Reference:	KB @ 3370.7usft (Precision 106)
Site:	(Gunner 8 Federal) Sec-5_T-26-S_R-34-E	North Reference:	Grid
Well:	Gunner 8 Federal Com #703H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Plan #1		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,500.0	5,500.0	0.0	0.0	NUDGE - Build 2.00
5,636.0	5,635.9	1.7	2.8	HOLD - 6704.3 at 5636.0 MD
12,340.3	12,332.7	165.5	275.5	KOP - DLS 10.00 TFO 120.50
13,252.5	12,919.0	-405.5	304.2	EOC - 9885.8 hold at 13252.5 MD
23,138.3	12,946.0	-10,290.9	386.6	TD at 23138.3








Concho Resources, Inc.
Project: Lea County, NM (NAD 27 NME)
Site: (Gunner 8 Federal) Sec-5_T-26-S_R-34-E
Well: Gunner 8 Federal Com #703H
Wellbore: OWB
Design: Plan #1
Lat: 32° 4' 44.418 N
Long: 103° 29' 36.650 W
Pad GL: 3339.7
KB: KB @ 3370.7usft (Precision 106)

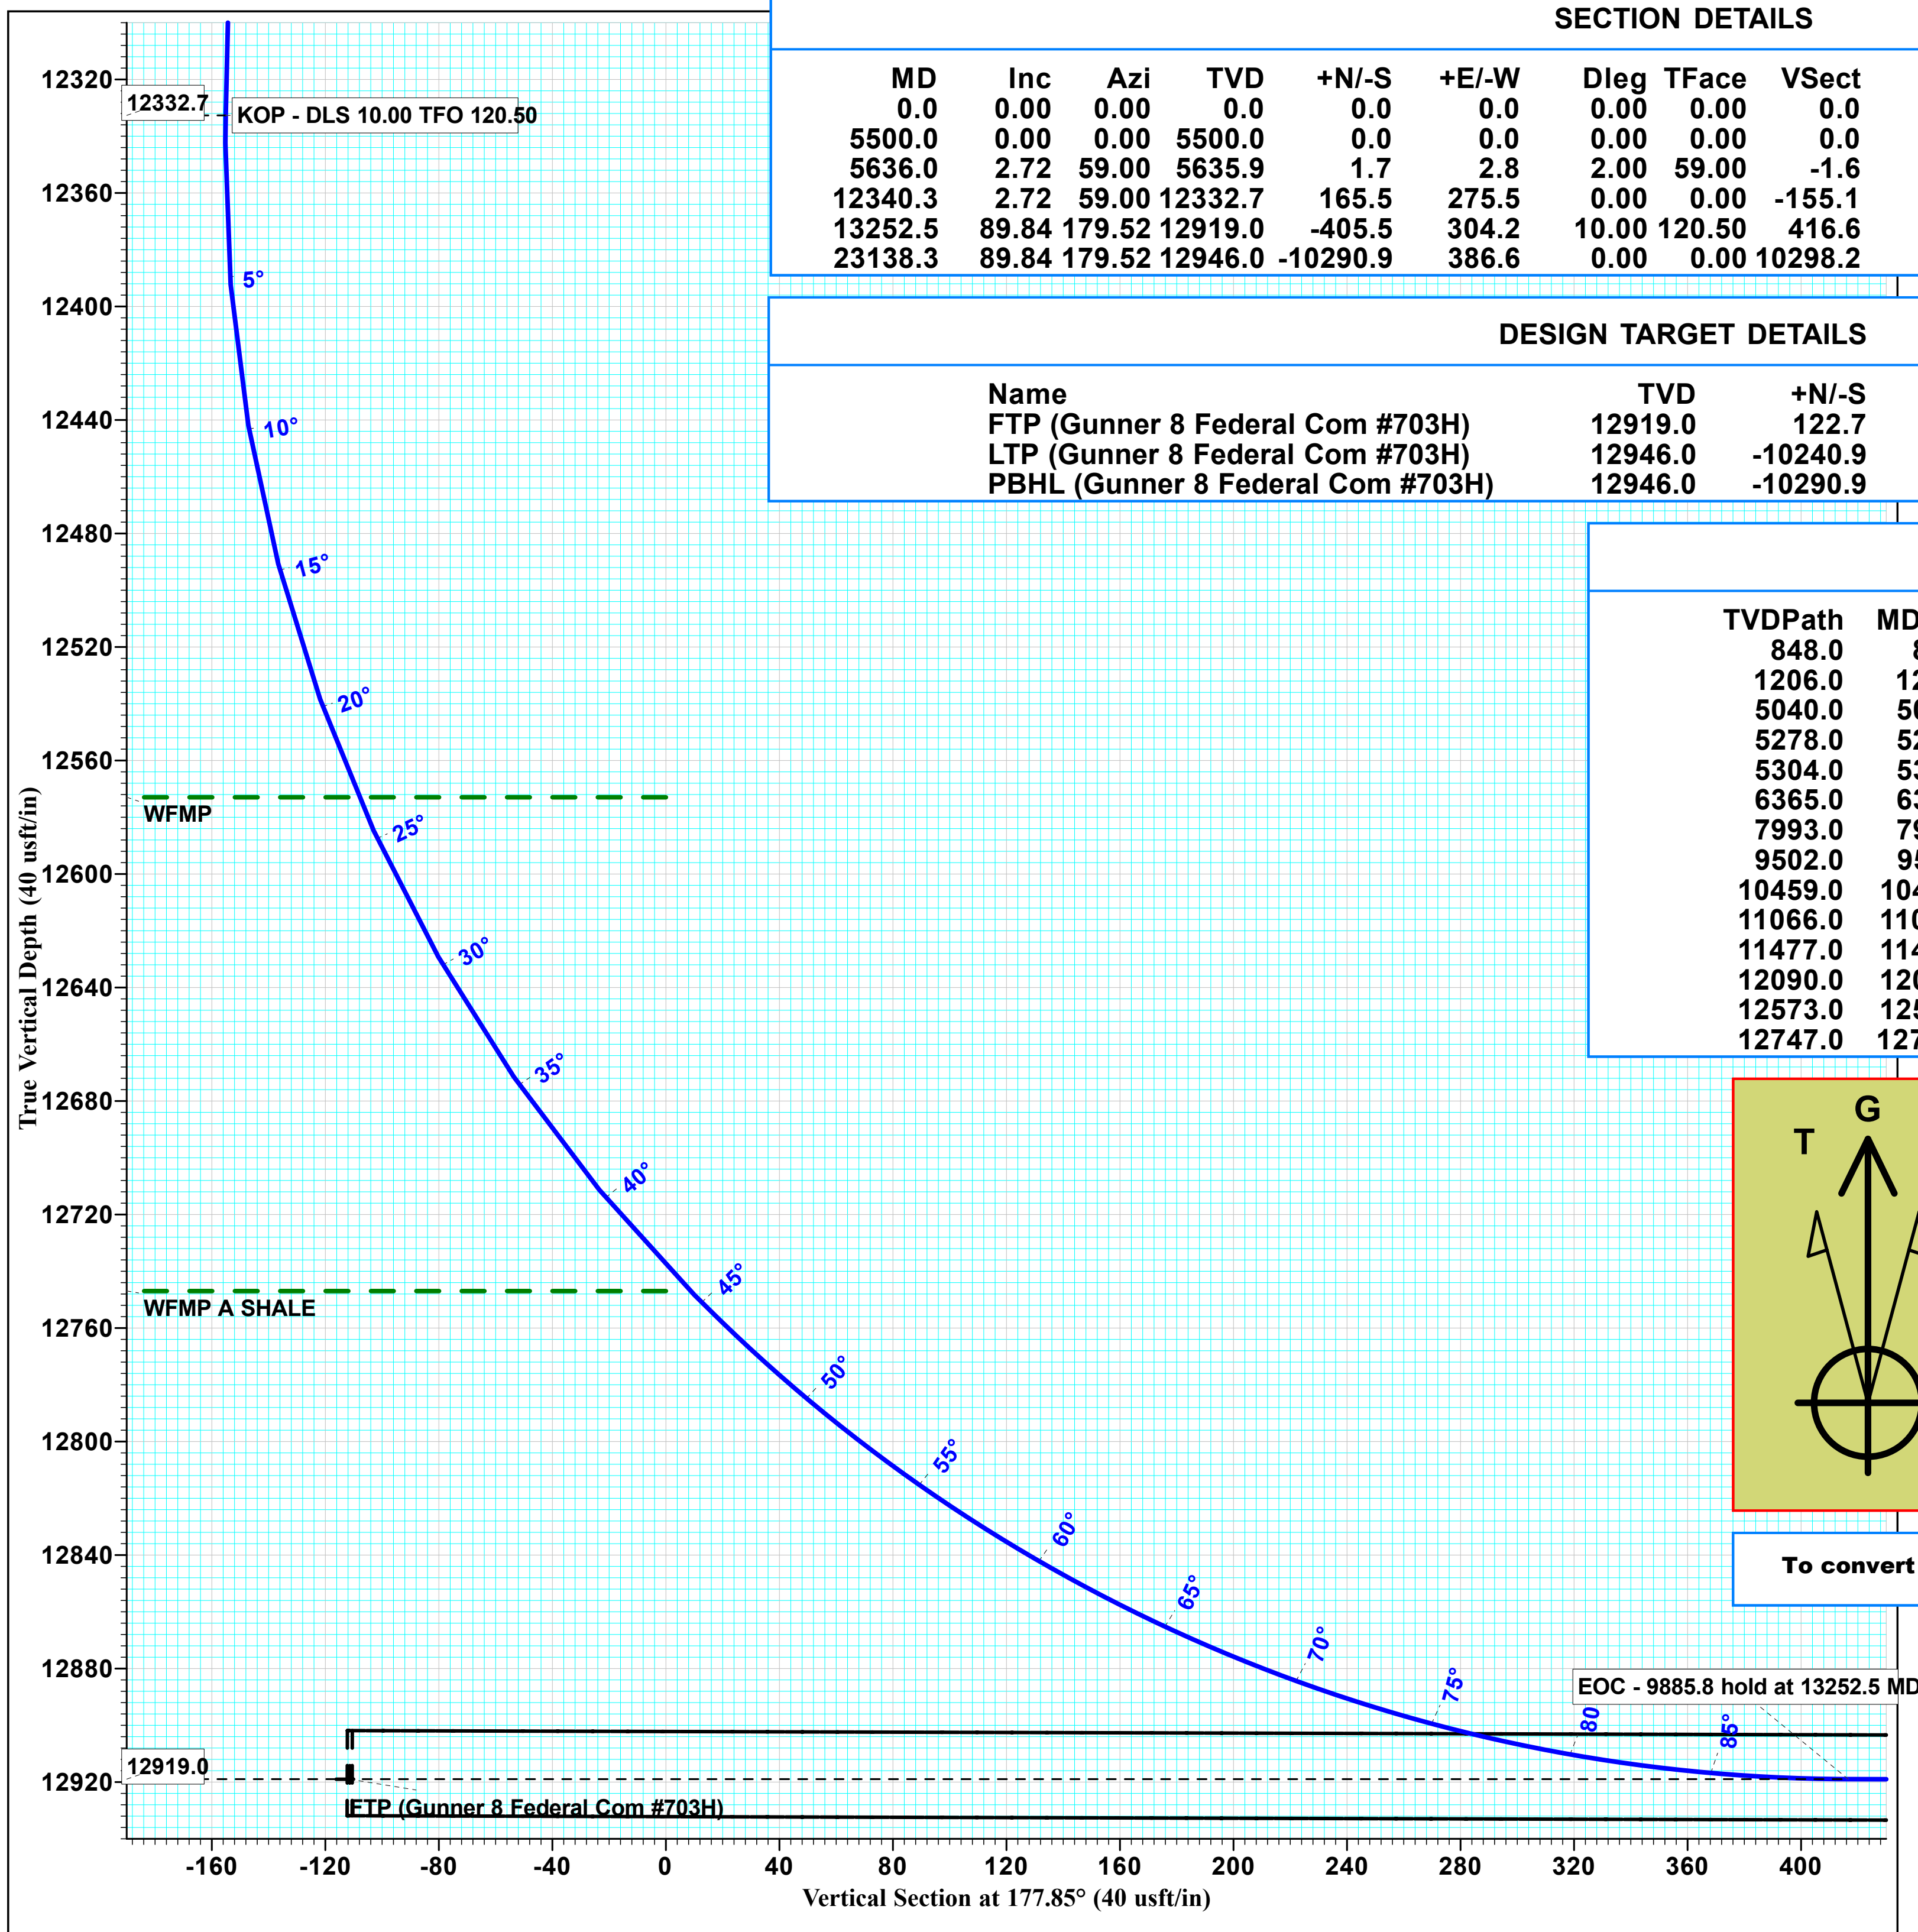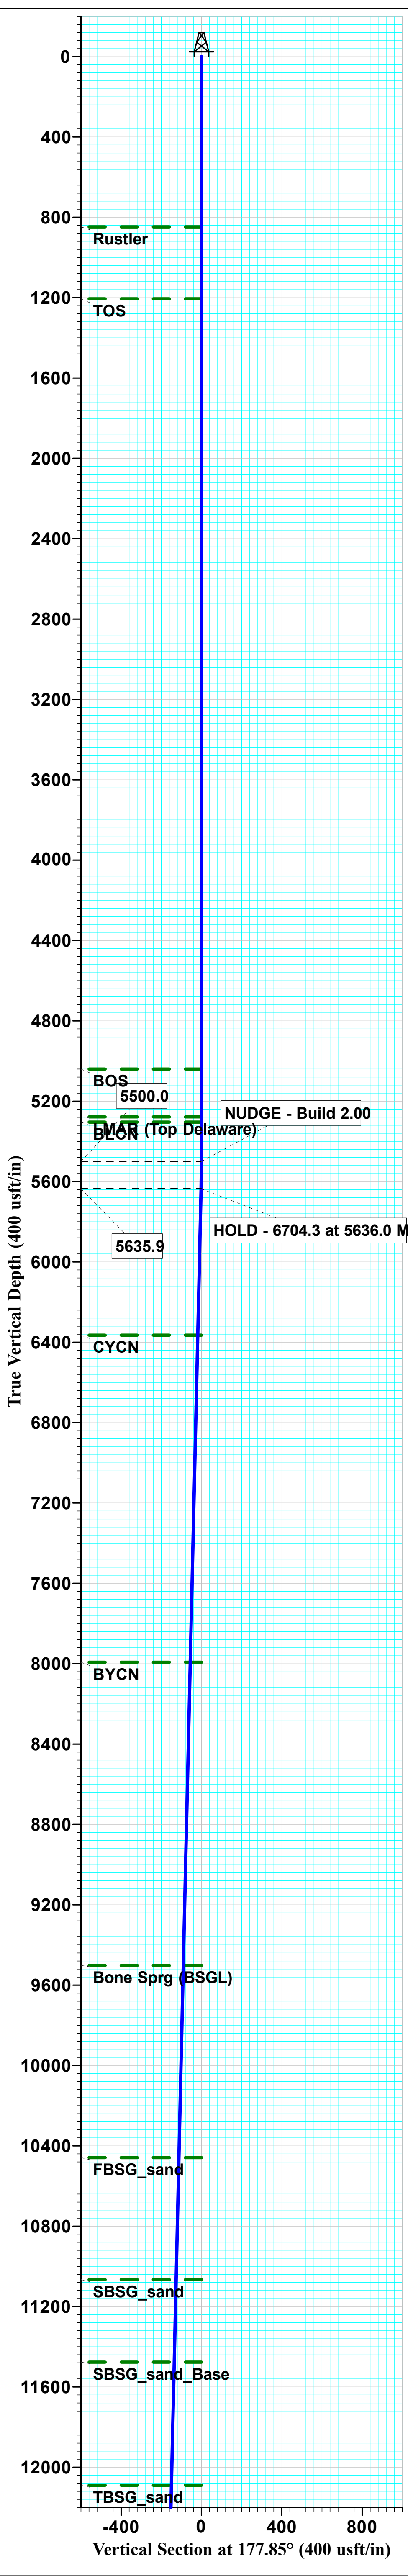

WELL DETAILS: Gunner 8 Federal Com #703H									
0.0	+N/-S	+E/-W	3339.7	3339.7	3339.7	3339.7	3339.7	3339.7	3339.7
0.0	0.0	0.0	393478.60	760120.20	32° 4' 44.418 N	103° 29' 36.650 W			
SECTION DETAILS									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
5500.0	0.00	0.00	5500.0	0.0	0.0	0.00	0.00	0.0	NUDGE - Build 2.00
5636.0	2.72	59.00	5635.9	1.7	2.8	2.00	59.00	-1.6	HOLD - 6704.3 at 5636.0 MD
12340.3	2.72	59.00	12332.7	165.5	275.5	0.00	0.00	-155.1	KOP - DLS 10.00 TFO 120.50
13252.5	89.84	179.52	12919.0	-405.5	304.2	10.00	120.50	416.6	EOC - 9885.8 hold at 13252.5 MD
23138.3	89.84	179.52	12946.0	-10290.9	386.6	0.00	0.00	10298.2	TD at 23138.3
DESIGN TARGET DETAILS									
Name	TVD	+N/-S	+E/-W	Northing	Easting				
FTP (Gunner 8 Federal Com #703H)	12919.0	122.7	299.0	393601.30	760419.20				
LTP (Gunner 8 Federal Com #703H)	12946.0	-10240.9	386.2	383237.70	760506.40				
PBHL (Gunner 8 Federal Com #703H)	12946.0	-10290.9	386.6	383187.70	760506.80				

FORMATIONS		
TVDPath	MDPath	Formation
848.0	848.0	Rustler
1206.0	1206.0	TOS
5040.0	5040.0	BOS
5278.0	5278.0	LMAR (Top Delaware)
5304.0	5304.0	BLCN
6365.0	6365.9	CYCN
7993.0	7995.7	BYCN
9502.0	9506.4	Bone Sprg (BSGL)
10459.0	10464.5	FBSG_sand
11066.0	11072.2	SBSG_sand
11477.0	11483.6	SBSG_sand_Base
12090.0	12097.3	TBSG_sand
12573.0	12587.2	WFMP
12747.0	12798.1	WFMP A SHALE

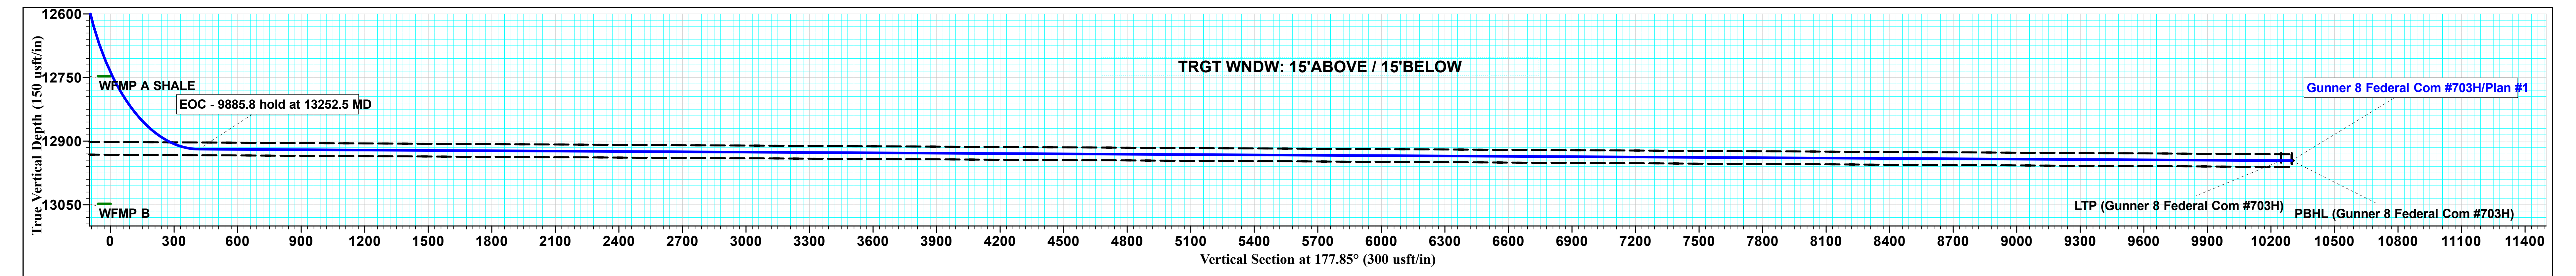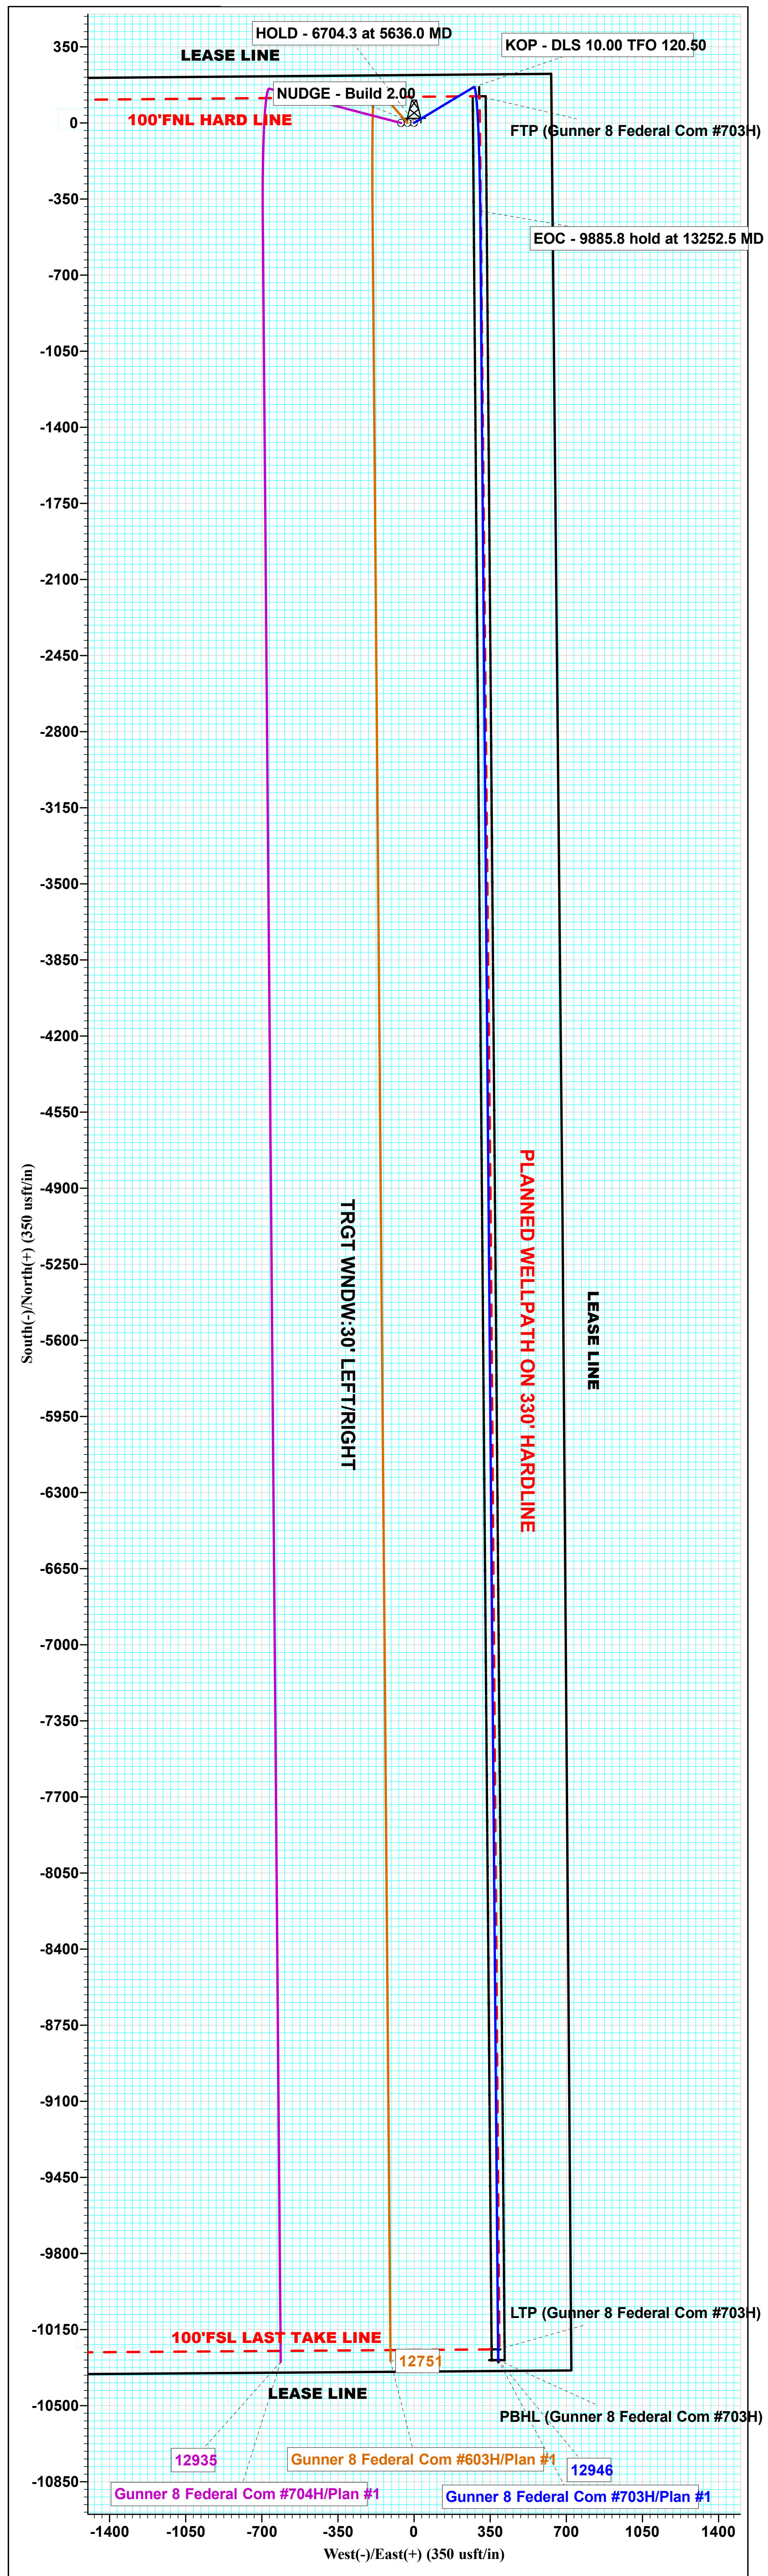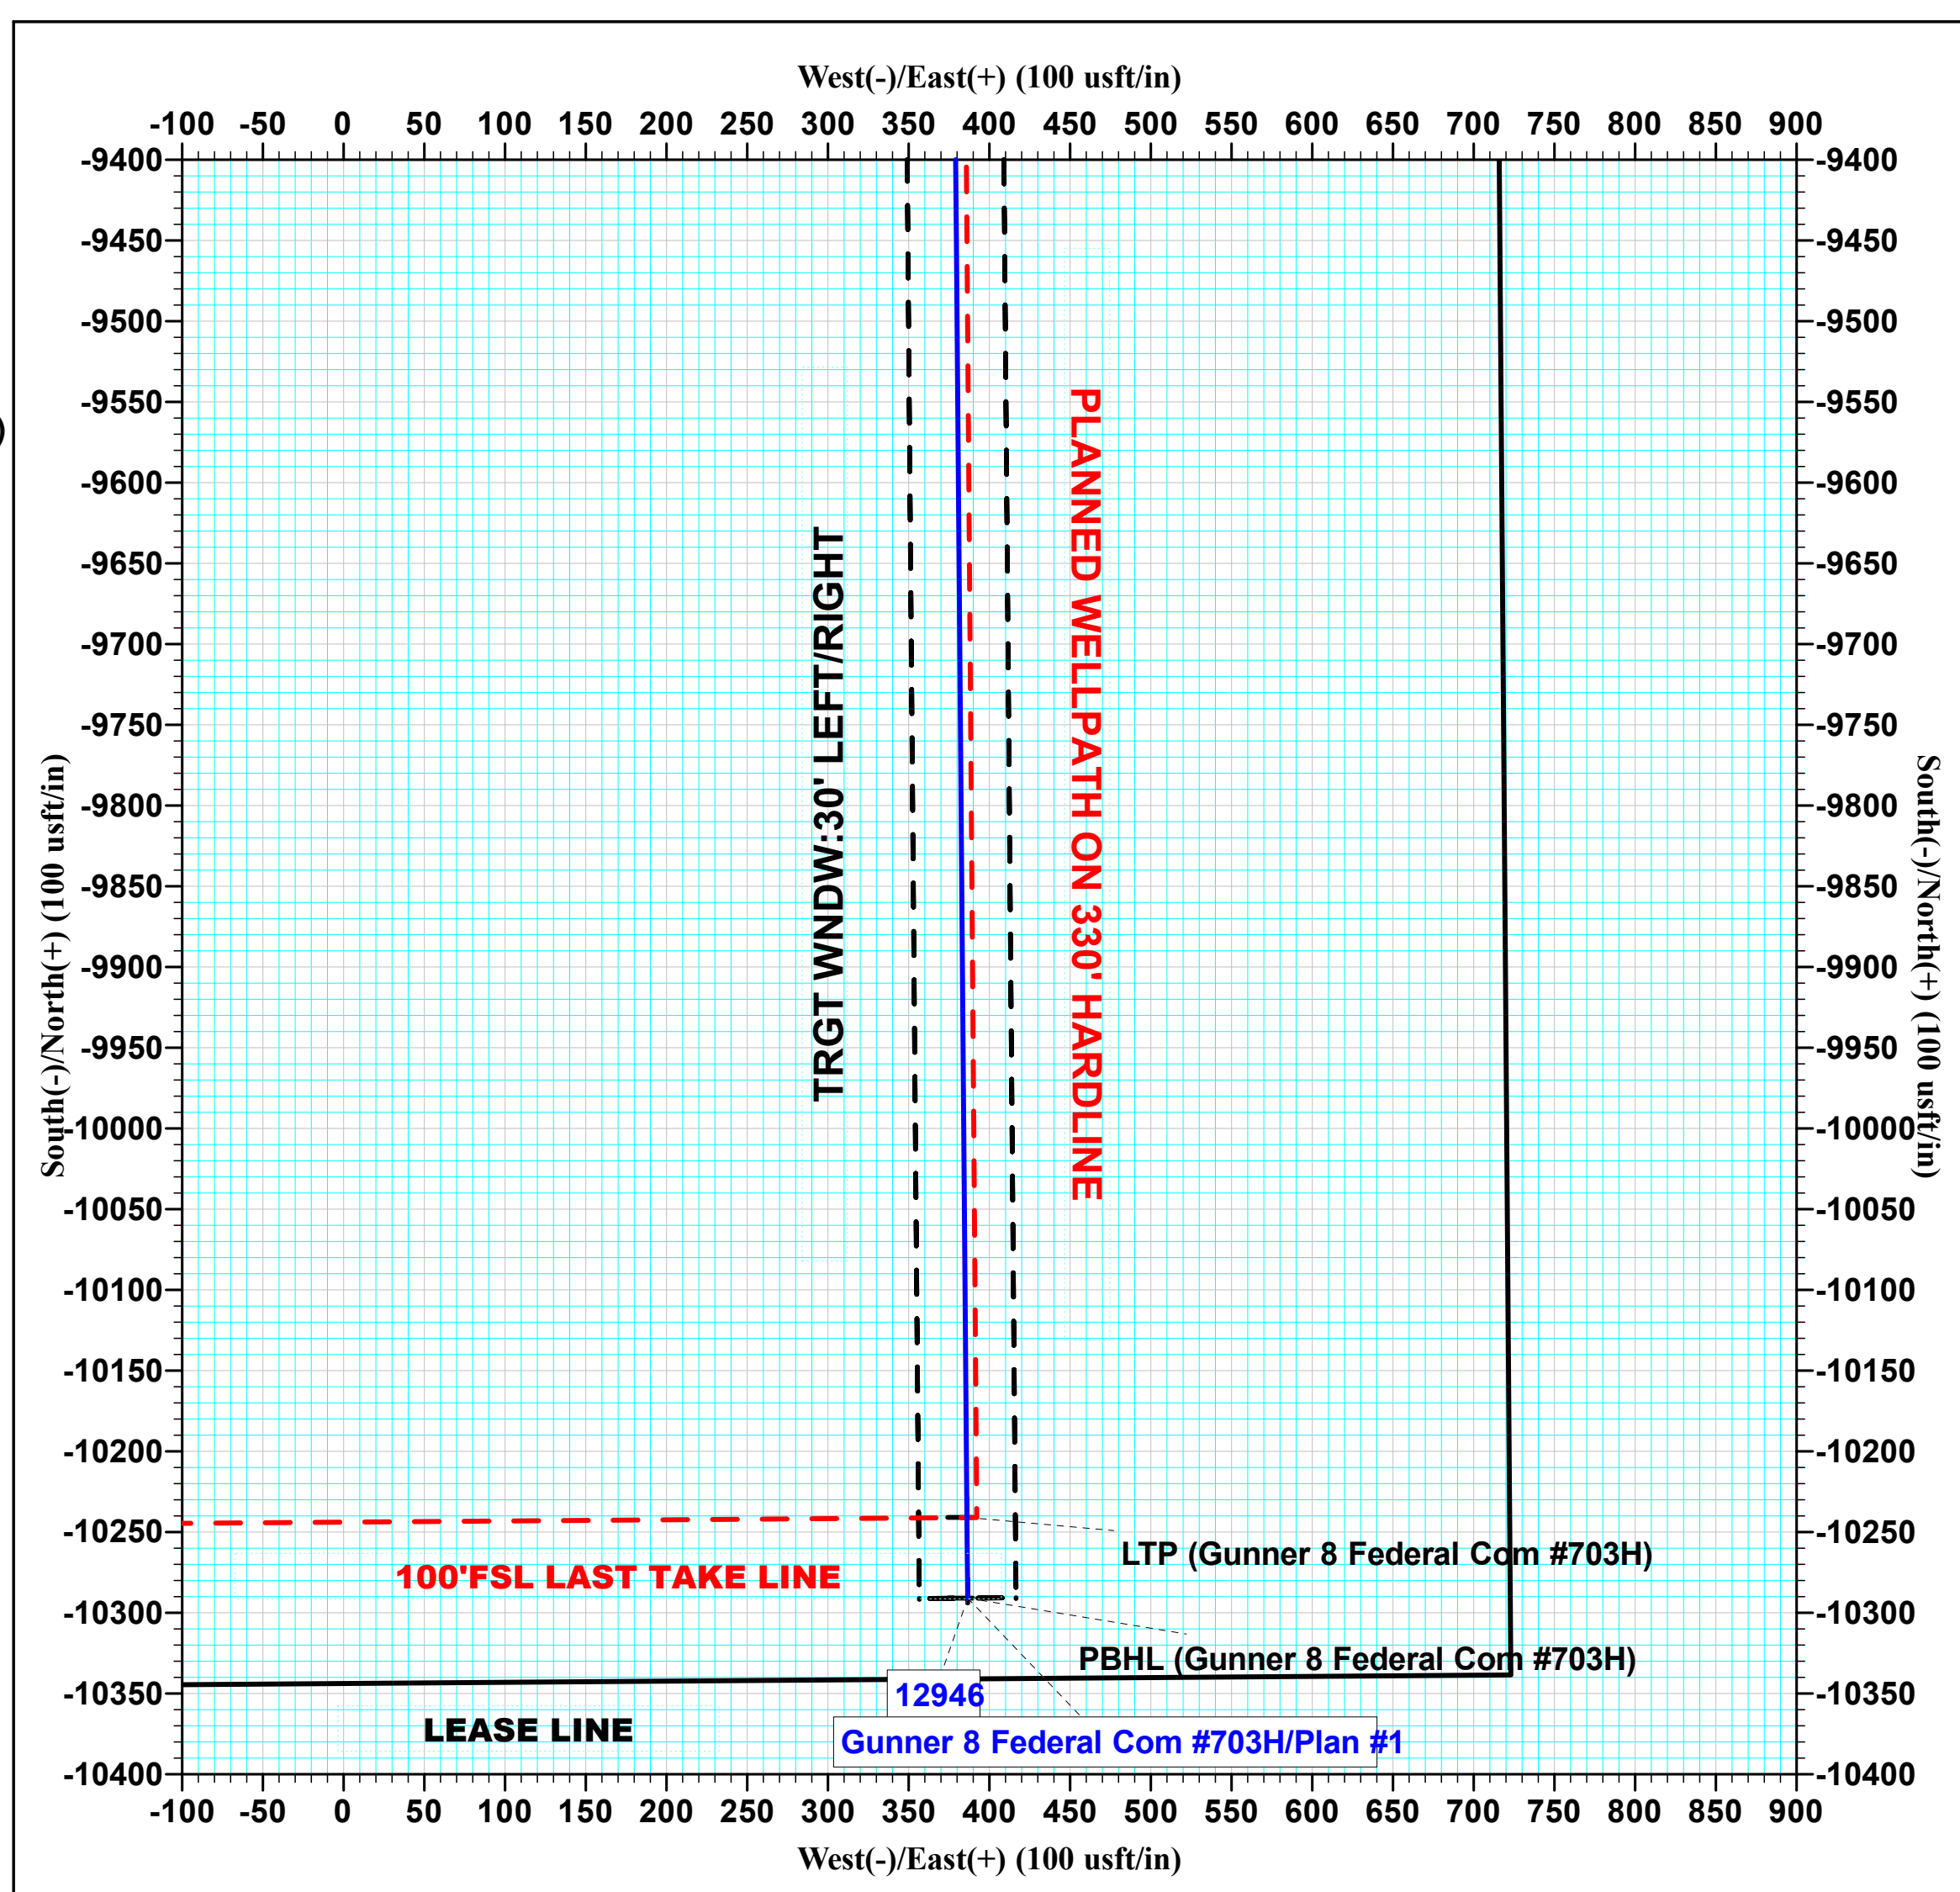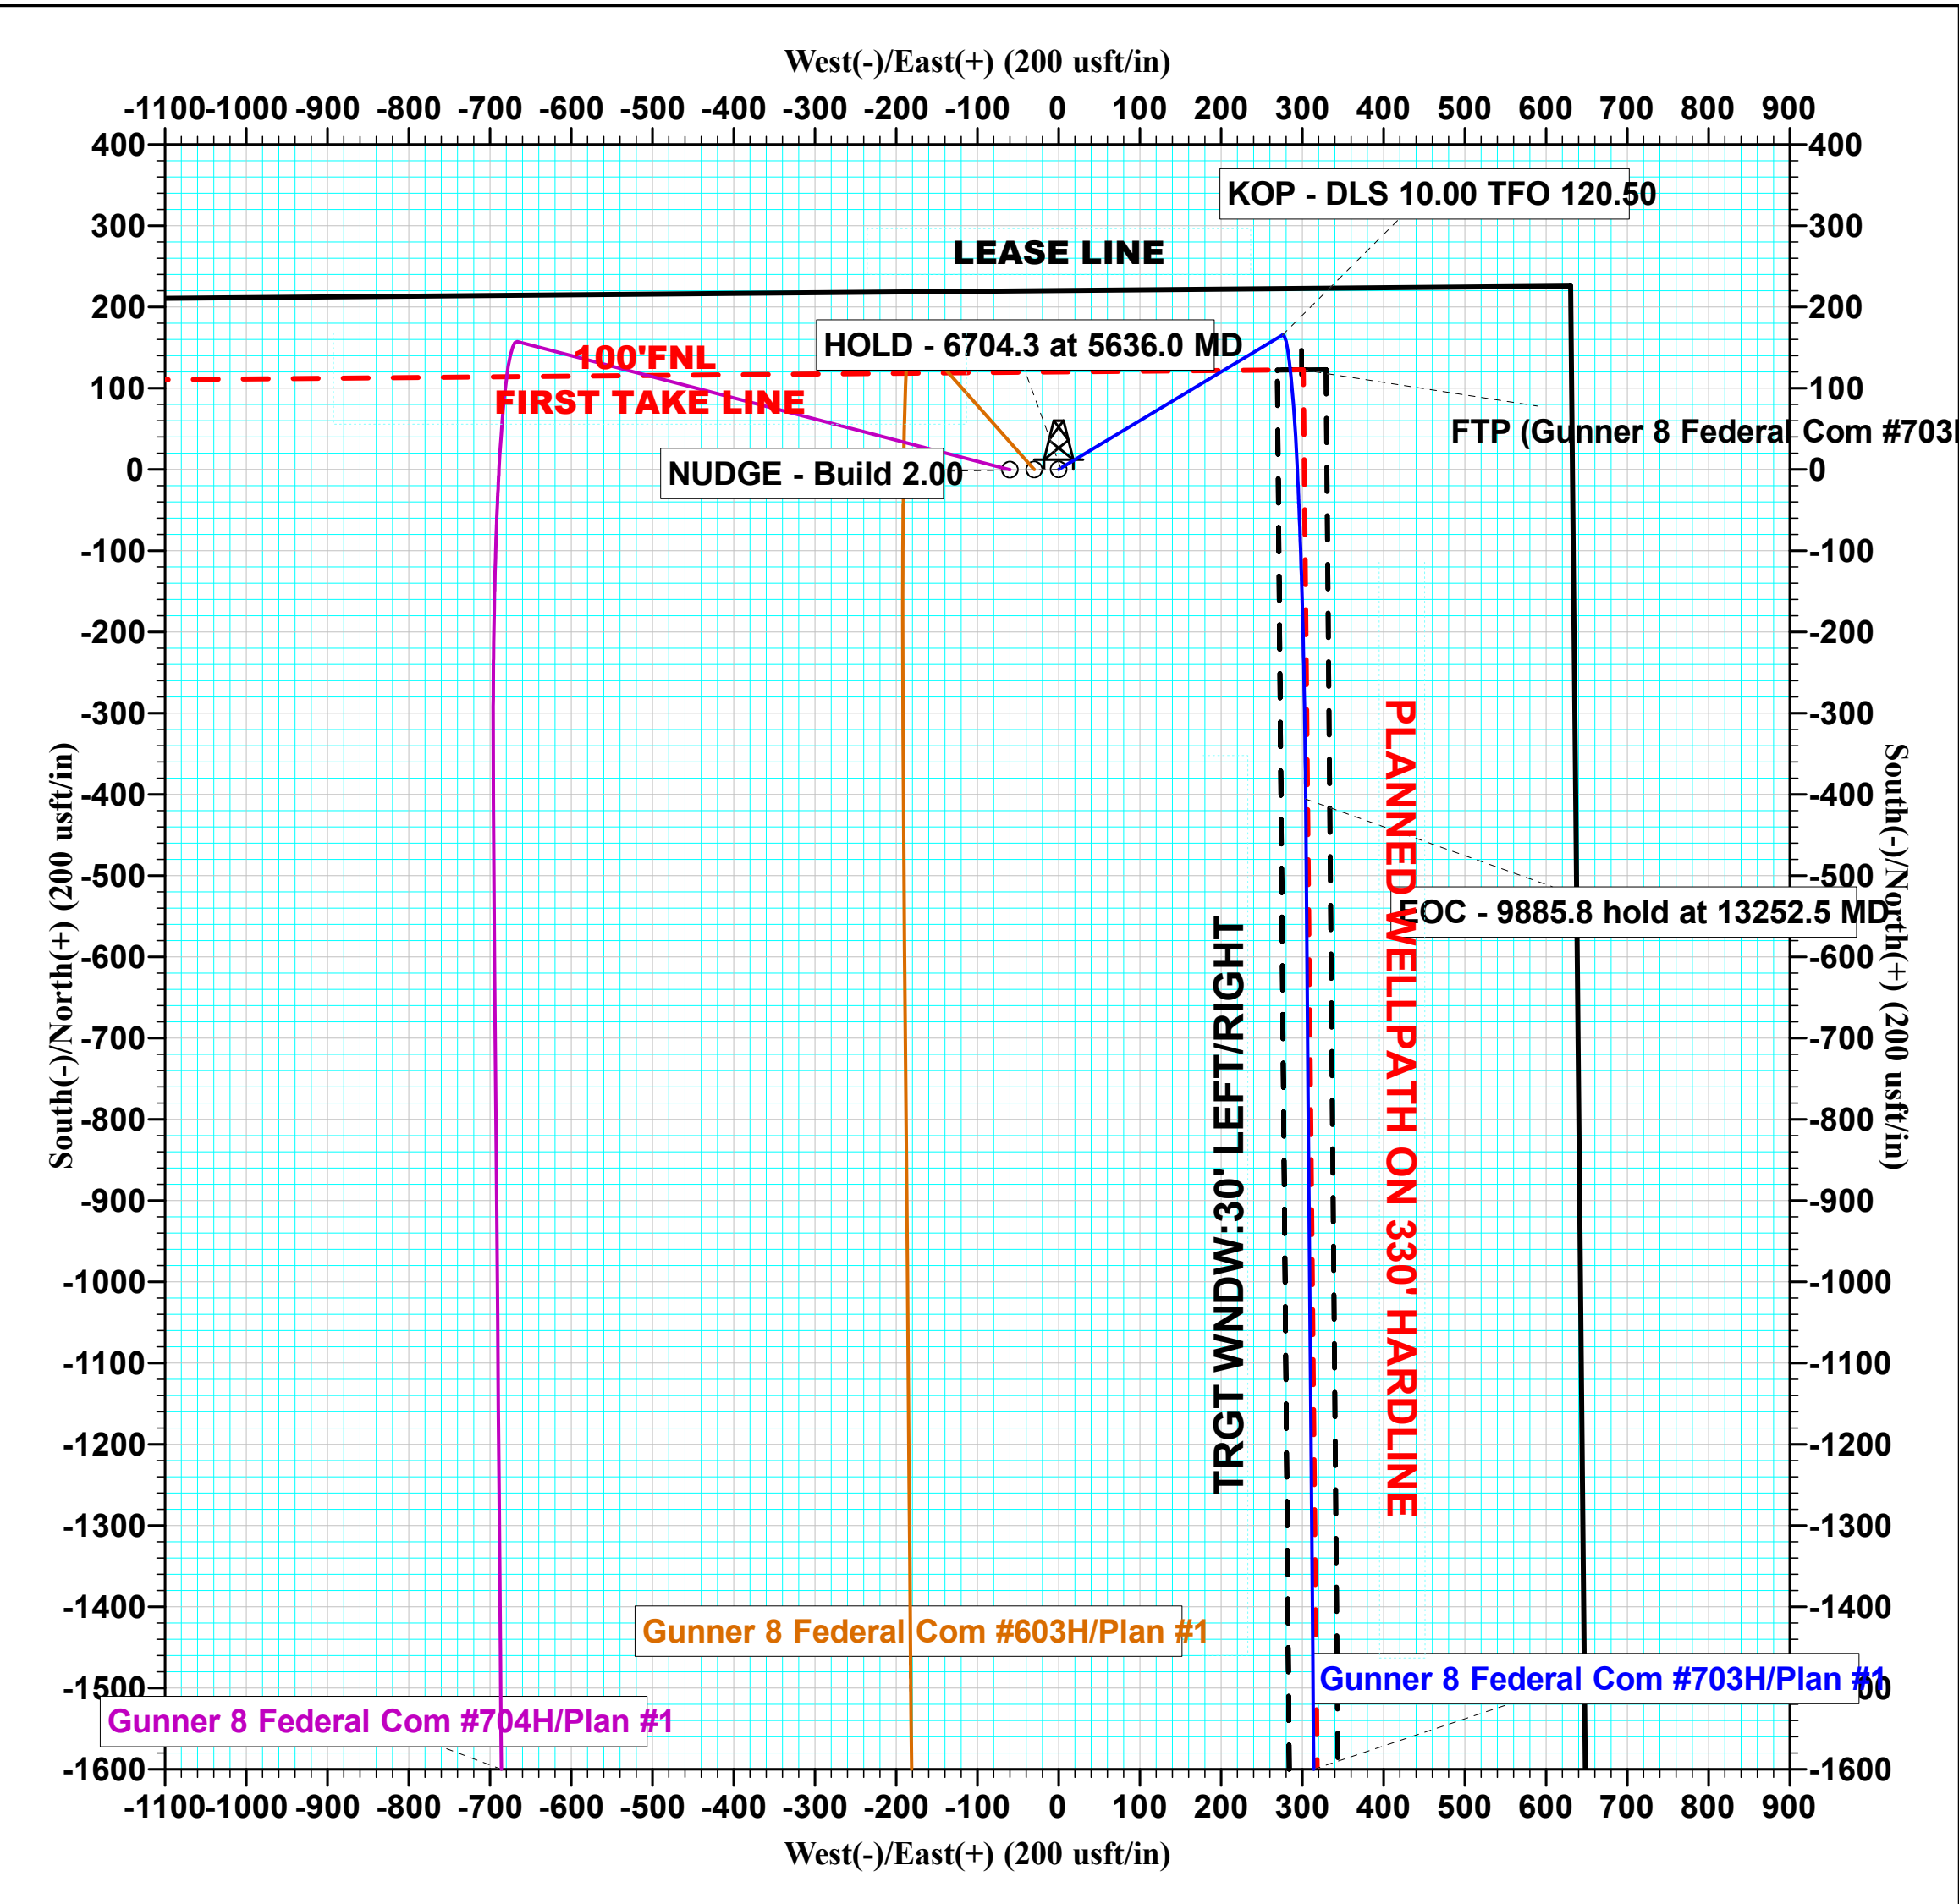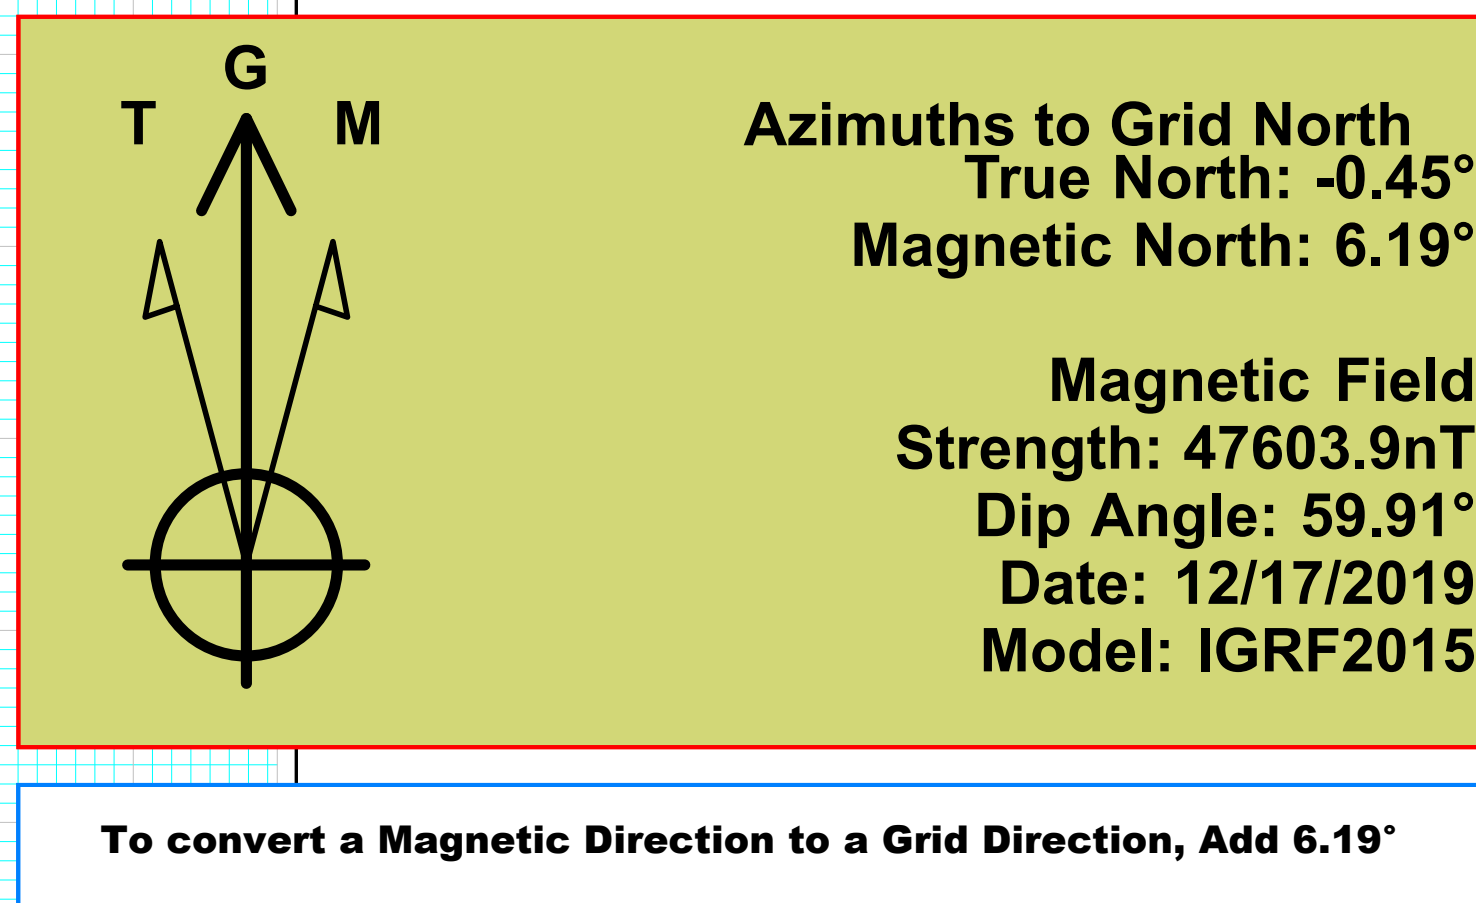

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST


	<u>OFFICE</u>	<u>MOBILE</u>
COG OPERATING LLC OFFICE	575-748-6940	
SETH WILD	432-683-7443	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

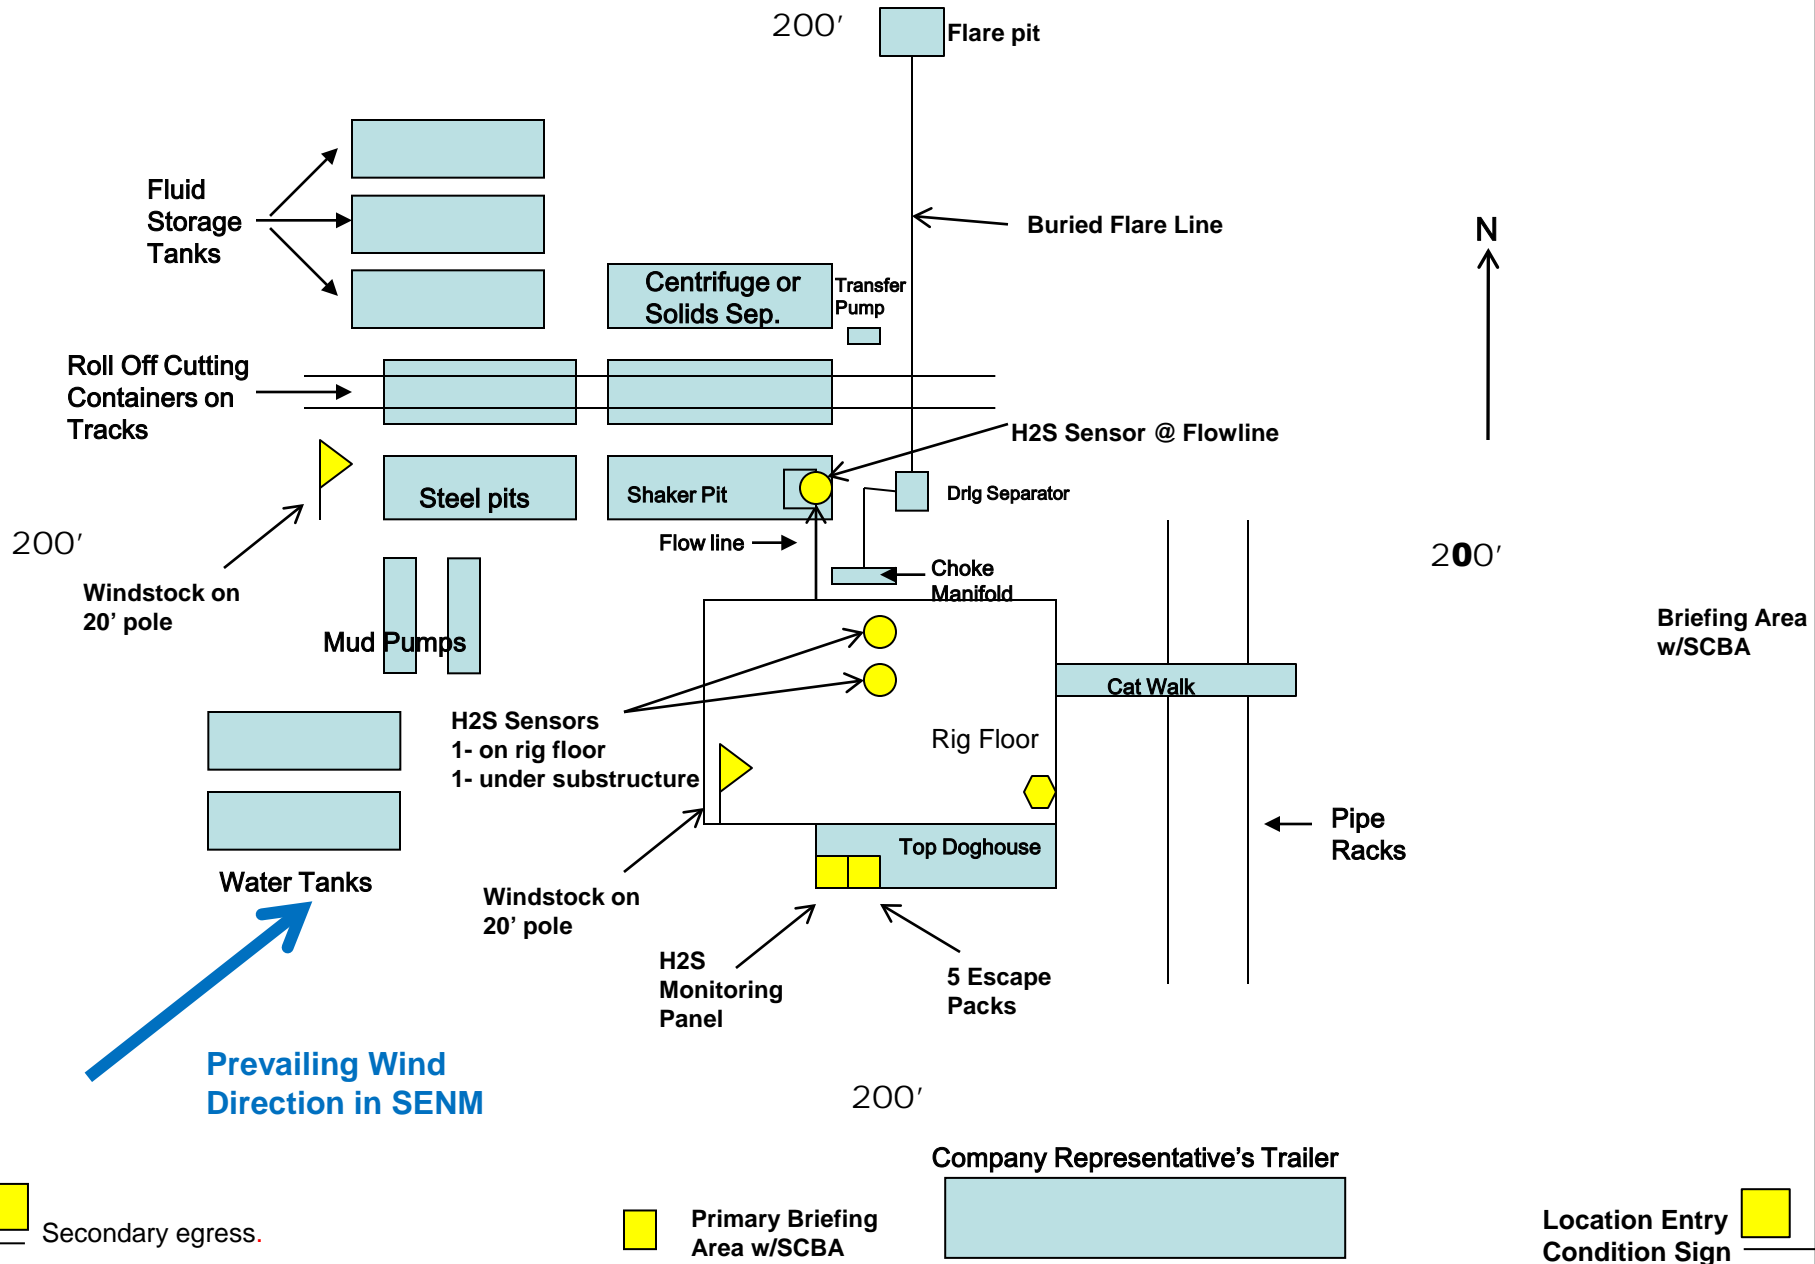

COG Operating LLC

Rig Plat & Closed Loop Equipment Diagram

Well pad will be 400' X 400'
with cellar in center of pad

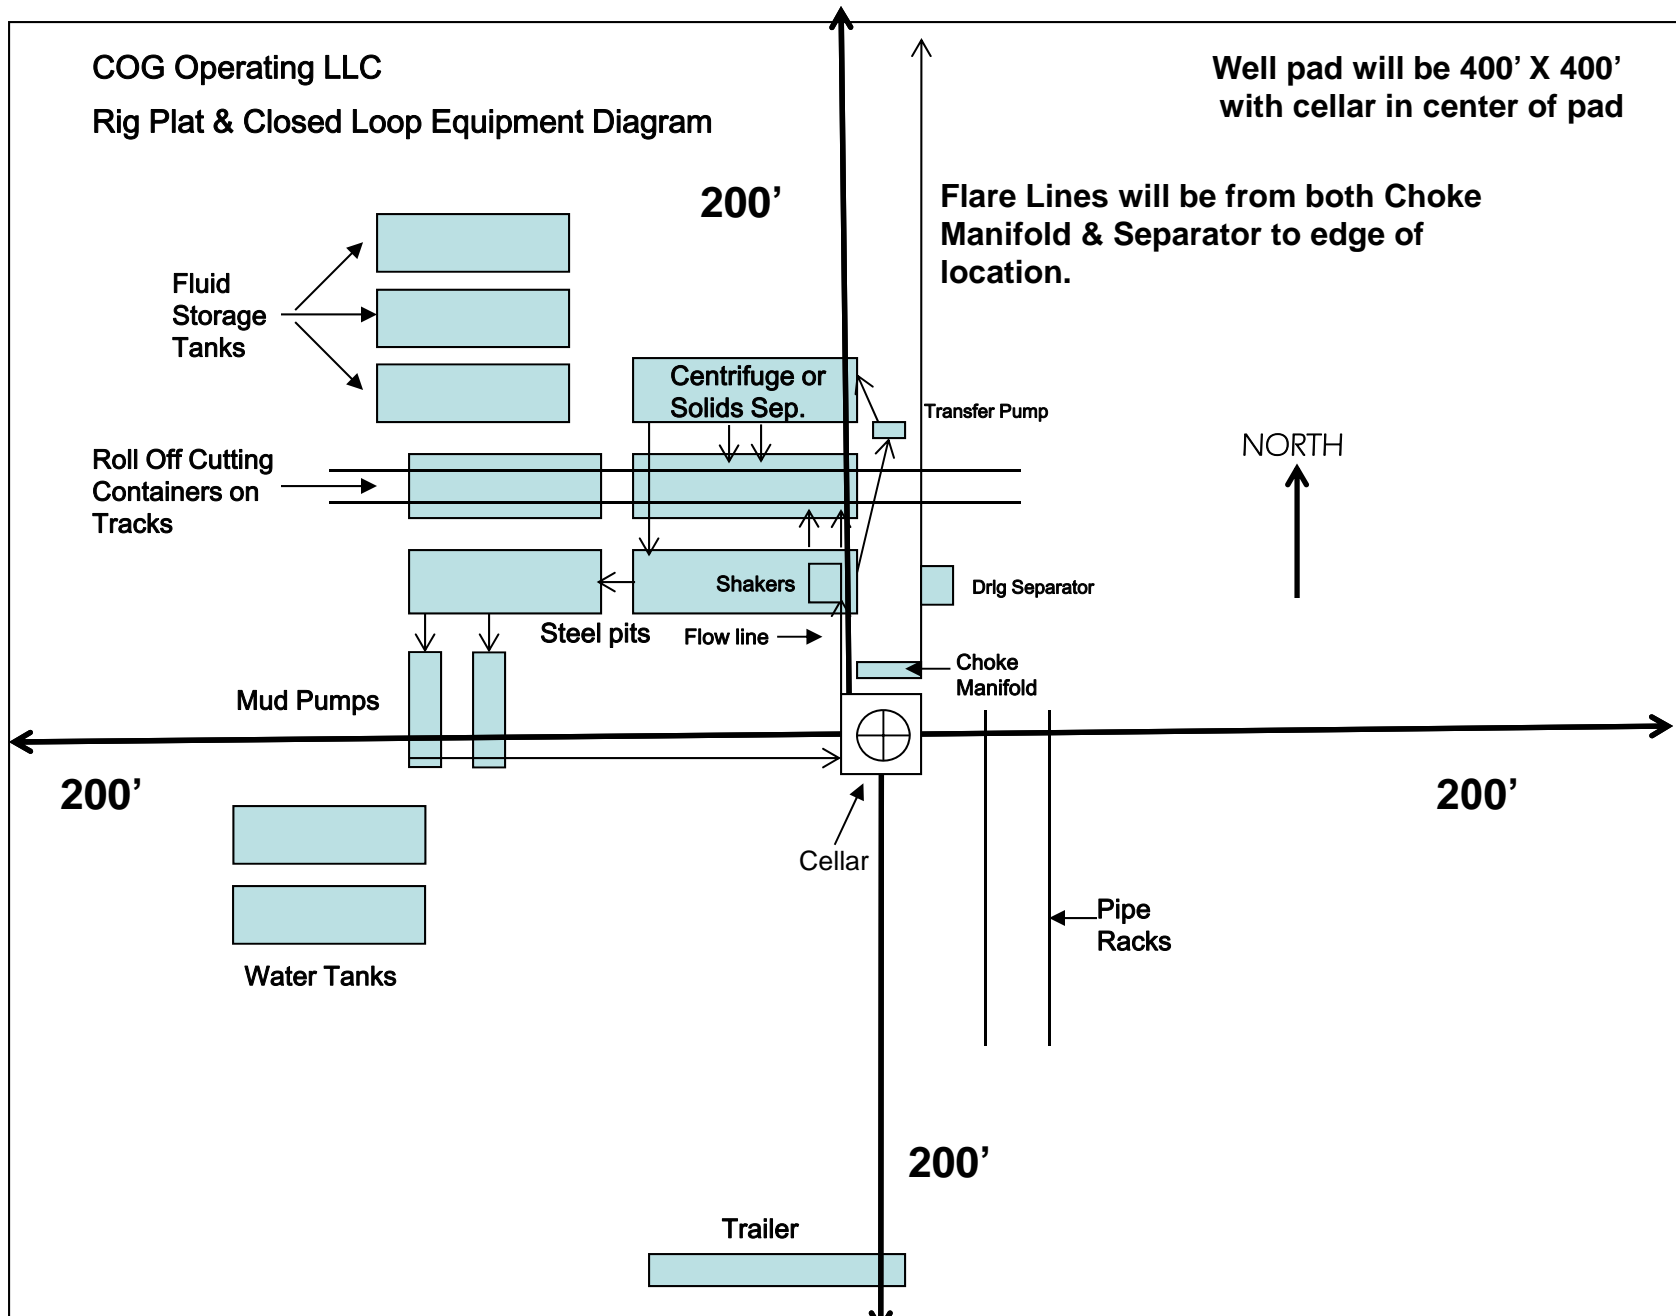


Exhibit 1

"I further certify that COG will comply with Rule 19.15.17
NMAC by using a Closed Loop System."