

Office

Energy, Minerals and Natural Resources

Revised August 1, 2011

District I - (575) 393-6161

1625 N. French Dr., Hobbs, NM 88240

District II - (575) 748-1283

811 S. First St., Artesia, NM 88210

District III - (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV - (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM

87505

HOBBS OCD

OIL CONSERVATION DIVISION

MAR 22 2013 220 South St. Francis Dr.

Santa Fe, NM 87505

RECEIVED

WELL API NO.

30-025-37134 ✓

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

V-5199

7. Lease Name or Unit Agreement Name

Pluma 29 State ✓

8. Well Number 4 ✓

9. OGRID Number 16696 ✓

10. Pool name or Wildcat

Feather Morrow

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

OXY USA Inc.

3. Address of Operator

P.O. Box 50250 Midland, TX 79710

4. Well Location

Unit Letter J : 1800 feet from the South line and 1650 feet from the East lineSection 29 Township 15S Range 32E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

4323'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐CHANGE PLANS ☐PULL OR ALTER CASING ☐MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐P AND A ☐CASING/CEMENT JOB ☐OTHER: ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-12520' PB-8882' Perfs 9002-9012' CIBP-8907'

13-3/8" 48# csg @ 455' w/ 425sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 40# csg @ 4200' w/ 1770sx, 12-1/4" hole, TOC-26'-TS

5-1/2" 17# csg @ 12520' w/ 3370sx, 7-7/8" hole, TOC-Surface-Circ

1. RIH & tag cmt/CIBP @ 8882', M&P 25sx cmt to 8730

2. M&P 25sx cmt @ 6900-6750' WOC-Tag

3. M&P 25sx cmt @ 5575-5425' WOC-Tag

4. M&P 25sx cmt @ 4250-4100' WOC-Tag

5. M&P 25sx cmt @ 2500-2350' WOC-Tag

6. M&P 75sx cmt @ 505' to surface

10# MLF between plugs

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Regulatory Advisor

DATE

3/21/13

Type or print name

David Stewart

E-mail address: david.stewart@oxy.com

PHONE: 432-685-5717

For State Use Only

APPROVED BY:

TITLE

DIST. MGR

DATE


3-26-2013

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office: **Must be Notified**
24 hours prior to the beginning of Plugging Operations begin.

MAR 28 2013

OXY USA Inc. - Current
Pluma 29 State #4
API No. 30-025-37134

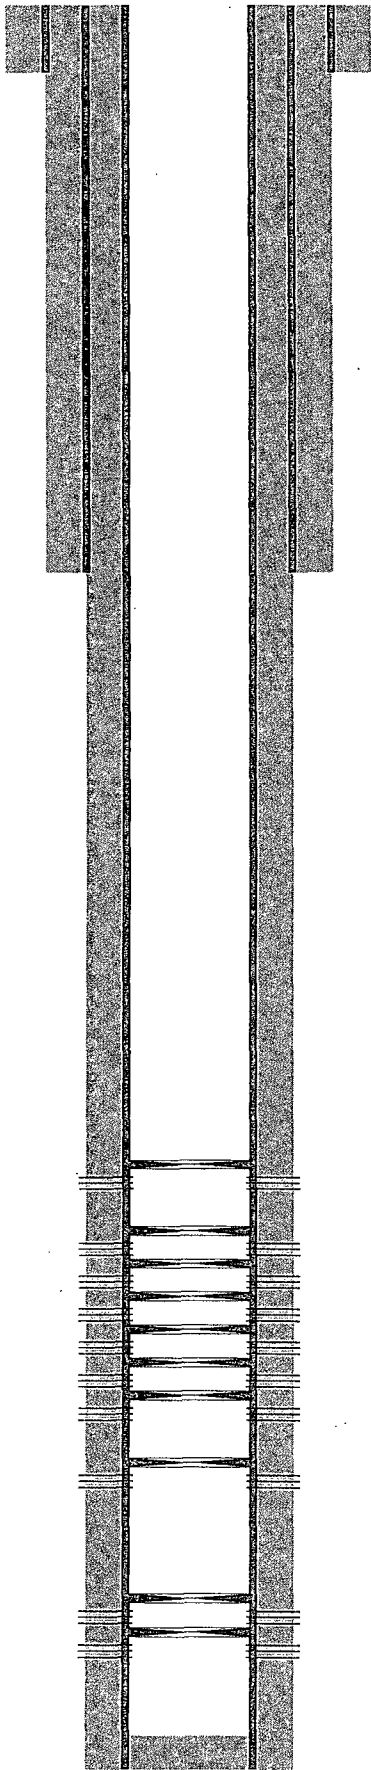

17-1/2" hole @ 455'
13-3/8" csg @ 455'
w/ 425sx-TOC-Surf-Circ

12-1/4" hole @ 4200'
9-5/8" csg @ 4200'
w/ 1770sx-TOC-26'-TS

CIBP @ 8907' w/ 25' cmt

CIBP @ 9460' w/ 50' cmt
CIBP @ 9660'
CIBP @ 9785'
CIBP @ 9880'
CIBP @ 9965'
CIBP @ 10034'

CIBP @ 10324' w/ 50' cmt

CIBP @ 11348' w/ 50' cmt
CIBP @ 11638' w/ 50' cmt

Perfs @ 9002-9012'

Perfs @ 9490-9562'
Perfs @ 9685-9774'
Perfs @ 9801-9852'
Perfs @ 9904-9952'
Perfs @ 9972-9979'
Perfs @ 10064-10076'

Perfs @ 10354-10392'

Perfs @ 11378-11396'
Perfs @ 11688-11698'

7-7/8" hole @ 12520'
5-1/2" csg @ 12520'
w/ 3370sx-TOC-Surf-Circ

TD-12520'

OXY USA Inc. - Proposed
Pluma 29 State #4
API No. 30-025-37134

75sx @ 505'-Surface

25sx @ 2500-2350' WOC-Tag

25sx @ 4250-4100' WOC-Tag

25sx @ 5575-5425' WOC-Tag

25sx @ 6900-6750' WOC-Tag

25sx @ 8882-8730'

CIBP @ 8907' w/ 25' cmt

CIBP @ 9460' w/ 50' cmt

CIBP @ 9660'

CIBP @ 9785'

CIBP @ 9880'

CIBP @ 9965'

CIBP @ 10034'

CIBP @ 10324' w/ 50' cmt

CIBP @ 11348' w/ 50' cmt

CIBP @ 11638' w/ 50' cmt

17-1/2" hole @ 455'
13-3/8" csg @ 455'
w/ 425sx-TOC-Surf-Circ

12-1/4" hole @ 4200'
9-5/8" csg @ 4200'
w/ 1770sx-TOC-26'-TS

Perfs @ 9002-9012'

Perfs @ 9490-9562'

Perfs @ 9685-9774'

Perfs @ 9801-9852'

Perfs @ 9904-9952'

Perfs @ 9972-9979'


Perfs @ 10064-10076'

Perfs @ 10354-10392'

Perfs @ 11378-11396'

Perfs @ 11688-11698'

7-7/8" hole @ 12520'
5-1/2" csg @ 12520'
w/ 3370sx-TOC-Surf-Circ

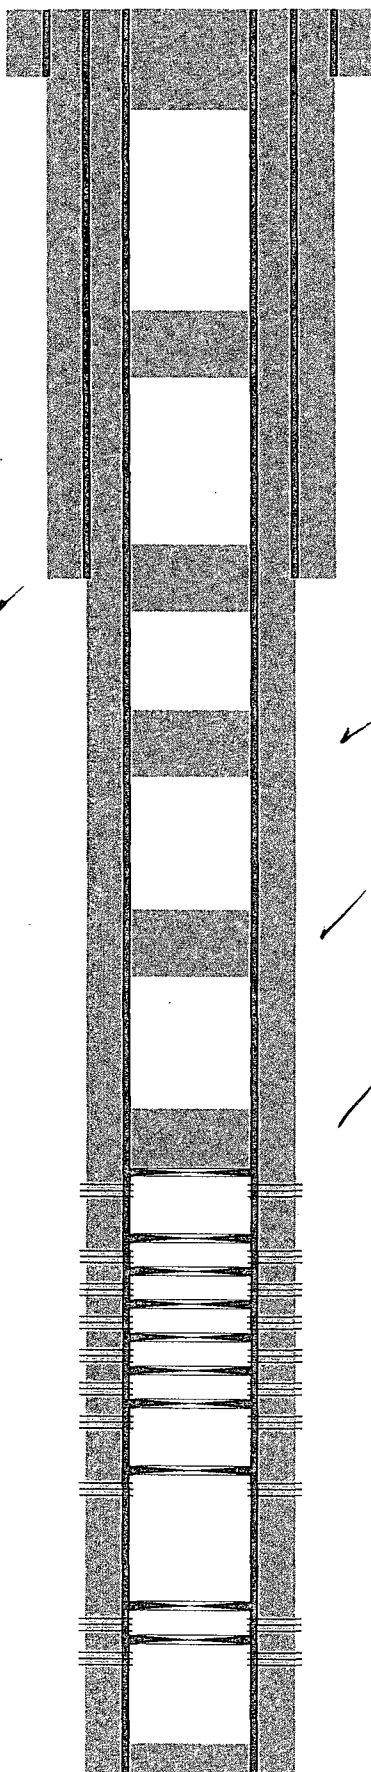

TD-12520'