Form 3160-5 (August, 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

D.	FORM APPROVED
BBS OCD	OMB No. 1004-0137
	Expires: July 31, 2010

BU	NOTICES A	AND MAI	NAGEMEN	" JUL 2	5 2040
INDRY	NOTICES A	AND REP	ORTS ON	WELLS	# ZU13

Lease Serial No. NMNM120910

SU

	not use this form for propo doned well. Use Form 3160				6.	If Indian, Allott	tee, or	Tribe Name	
SUBMIT IN	TRIPLICATE - Other Ins	structio	ons on page 2.		7.	If Unit or CA.	Agreen	nent Name and	or No.
I. Type of Well Gas Well Gas Well	Other				8.	Well Name and			
2. Name of Operator						API Well No.	tail :	3 Federal #	#IH /
COG Production LLC 3a. Address 2208 W. Main Street			3b. Phone No. (includ	le area code) 18-6940		. <u></u>)25-40684	
Artesia, NM 88210 4. Location of Well (Footage, Sec., T., R.,	M., or Survey Description)		Lat.		_	Field and Poo WC-025 G(-		Bone Spring
SHL: 260' FSL & 2290' FEL,	Unit O Sec 3-T26S-R32E		Long.			County or Par Lea Cou	rish, St		NM
12. CHECK APPROPRIATE BOX	K(S) TO INDICATE NATU	RE OF	NOTICE, REPOI	RT, OR OTHER I	OAT.	A			
TYPE OF SUBMISSION			TY	PE OF ACTION					
Notice of Intent	Acidize		Deepen	Production (S	Start/ 1	Resume)		Water Shut-of	ff
	Altering Casing		Fracture Treat	Reclamation				Well Integrity	
X Subsequent Report	Casing Repair		New Construction	Recomplete				Other	
	Change Plans		Plug and abandon	Temporarily A	\band	on			
Final Abandonment Notice	Convert to Injection		Plug back	Water Dispos	al				
13. Describe Proposed or Completed	Operation (clearly state all pert	inent de	tails including estima	ted starting date of	any	proposed wor	k and	approximate	duration thereof.


If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamantion, have been completed, and the operator has

In the APD, a production facility was approved at the Pintail 3 Federal #2H location. Because of common ownership we were able to utilize the Pintail 3 Federal #1H production facility. A Surface flow line was installed from the #2H well to the #1H facility. Approximately 1559' of 3-1/2" steel tubing carries oil and water at a maximum pressure of 100 psi.

14. I hereby certify that the foregoing is true and correct.		
Name (Printed/ Typed)	my d	
Amy Avery	Title: Regulatory Techni	cian
Signature: Amy Avery	Date: 7/1/13	
THIS SPACE FOR FE	DERAL OR STATE OFFICE	USE
/s/George MacDonell	Title:	Date: JUL 2 2 2013
Conditions of approval, if any are attached. Approval of this notice does not war	rant or	
certify that the applicant holds legal or equitable title to those rights in the subject	ct lease Office:	
which would entitle the applicant to conduct operations t	thereon.	
Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212 make it a co		

(Instructions on page 2)

determined that the site is ready for final inspection.)

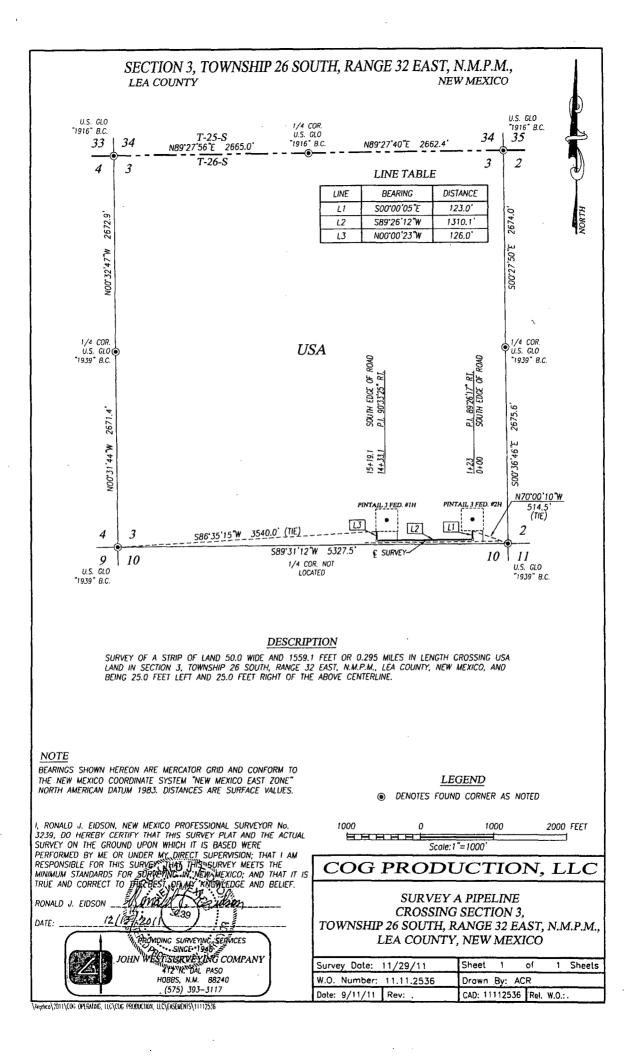

BLM LEASE NUMBER: NM120910

COMPANY NAME: COG Production LLC

ASSOCIATED WELL NAME: Pintail 3 Federal #1H

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
- 4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:
 - a. Activities of the holder including, but not limited to construction, operation, maintenance,

and termination of the facility.

- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

- 5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.
- 6. All construction and maintenance activity will be confined to the authorized right-of-way width of ______ feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.
- 7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.
- 8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky of duney areas, the pipeline will be "snaked" around hummocks and dunes rather then suspended across these features.
- 9. The pipeline shall be buried with a minimum of <u>24</u> inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

- 10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
- 12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
- 13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
- 14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
- 15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.
- 16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.