F'orm 3160-5 (August 2007)		UNITED STATES EPARTMENT OF THE INTE UREAU OF LAND MANAGEN			FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010	
a	SUNDRY NOTICES AND REPORTS ON WI Do not use this form for proposals to drill or to re abandoned well. Use form 3160-3 (APD) for such p			HOBBS OC	Expires: July 31, 2010 Expires: July 31, 2010 S. Lease Serial No. NMLC064118 G. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on reverse side.						ement, Name and/or No.
1. Type of Well X Oil Well	<u> </u>	RECEIV	V 518? Well Name and No. E.C. HILL B FEDERAL 24			
2. Name of Operator OXY USA INC.	· · · · · · · · · · · · · · · · · · ·	/ID STEWART Øoxy.com		9. API Well No. 30-025-33889	/	
3a. Address P.O. BOX 5025 MIDLAND, TX	Phone No. (include area con: 432-685-5717 : 432-685-5717	ode)	10. Field and Pool, or TEAGUE SIMP			
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)					11. County or Parish,	and State
Sec 34 T23S R37E NESE 2280FSL 560FEL V LEA COUNTY, NM 32.259810 N Lat, 103.144050 W Lon						
12.	CHECK APPF	ROPRIATE BOX(ES) TO IN	DICATE NATURE O	F NOTICE, RI	EPORT, OR OTHE	R DATA
TYPE OF SUB	TYPE OF SUBMISSION TYPE OF ACTION					
🛛 Notice of Inter	ıt	 Acidize Alter Casing 	 Deepen Fracture Treat 	Product:	ion (Start/Resume)	☐ Water Shut-Off ☐ Well Integrity
🗖 Subsequent Re	port	Casing Repair	□ New Construction	□ Recomp		Other
Final Abandonment Notice		Change Plans	🛛 Plug and Abandon	Tempor	arily Abandon	
		Convert to Injection Plug Back		🗖 Water D	er Disposal	
following completion testing has been con- determined that the TD-9555' PB' 13-3/8" 48# csg 8-5/8" 24-32# cs 5-1/2" 15.5-17#	on of the involved npleted. Final Ab site is ready for fi TD-9486' Pe @ 340' w/ 320 sg @ 3030' w/ csg @ 9555'D	erfs-9270-9383' 0sx cmt, 17-1/2" hole, TOC-Su 520sx cmt, 11" hole, TOC-Su VT @ 5976'w/1625sx cmt,7-7	in a multiple completion or ly after all requirements, ind urface Irf-Circ	recompletion in a r cluding reclamation	ew interval, a Form 316 h, have been completed, in the second sec	0-4 shall be filed once and the operator has
Circulate 10# M 1. RIH & set CIE 2. M&P 25sx cm 3. M&P 65sx cm 4. M&P 40sx cm	I&P 25sx cmt ′5' WOC-Tag ∕5' WOC-Tag		Б	RECLAMATION PROCEDURE ATTACHED		
14. I hereby certify that the foregoing is true and correct. Electronic Submission #214739 verified by the BLM Well Information System For OXY USA INC., sent to the Hobbs Committed to AFMSS for processing by JOHNNY DICKERSON on 07/26/2013 () Name(Printed/Typed) DAVID STEWART Title SR. REGULATORY ADVISOR						
Signature (Electronic Submission)			Date 07/24	4/2013		
	<u> </u>	THIS SPACE FOR F	EDERAL OR STAT	E OFFICE US	SE	
	/	D.D		10		8-10-13
Approved By	· lime	<u>Title</u>	< ۲		Date	
certify that the approval, i which would entitle the a	holds legal or equ	d. Approval of this notice does not witable title to those rights in the subject operations thereon.	ect lease Office CF	<i>'0</i>		
Tile 18 U.S.C. Section 1 States any false, fictitio	001 and Title 43 I	U.S.C. Section 1212, makent a crime statements of roppesentations of pan	for any person knowingly matter within its jurisdicti	and willfully to ma on.	ke to any department or	agency of the United
	** OPERAT	OR-SUBMITTED ** OPER	ATOR-SUBMITTE			
				A	UG 1 4 2013	

Additional data for EC transaction #214739 that would not fit on the form

т Т

5. M&P 25sx cmt @ 3095-2965' WOC-Tag & Add for fesqe from 2970'-2350 wor Tag 6. Perf @ 1275', sqz 40sx cmt to 1160' WOC-Tag 7. Perf @ 390', sqz 125sx cmt to Surface

OXY USA Inc. - Proposed E.C. Hill B Federal #24 API No. 30-025-33889

125sx @ 390'-Surface

.

40sx @ 1275-1160' WOC-Tag


25sx @ 3095-2965' WOC-Tag

40sx @ 5285-5000' WOC-Tag

65sx @ 6385-5925' WOC-Tag

25sx @ 7250-7075' WOC-Tag

CIBP @ 9220' w/ 25sx

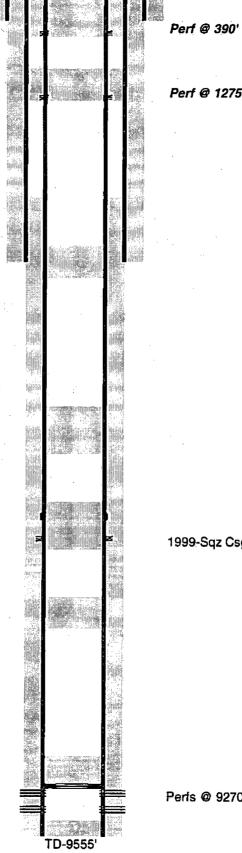

17-1/2" hole @ 340' 13-3/8" csg @ 340' w/ 320sx-TOC-Surf-Circ

Perf @ 1275'

11" hole @ 3030' 8-5/8" csg @ 3030' w/ 520sx-TOC-50'-TS

1999-Sqz Csg Lk @ 6286-6336' w/ 125sx cmt

7-7/8" hole @ 9555' 5-1/2" csg @ 9555' DVT @ 5976 w/ 1625sx-TOC-2595'-CBL


Perfs @ 9270-9383'

PB-9486'

OXY USA Inc. - Current E.C. Hill B Federal #24 API No. 30-025-33889

÷

.

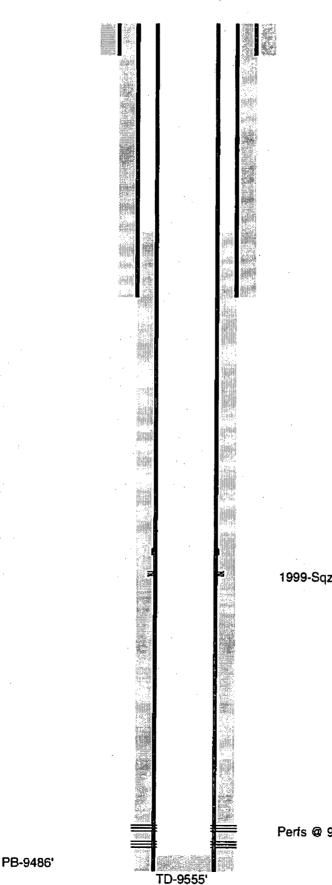

17-1/2" hole @ 340' 13-3/8" csg @ 340' w/ 320sx-TOC-Surf-Circ

11" hole @ 3030' 8-5/8" csg @ 3030' w/ 520sx-TOC-50'-TS

1999-Sqz Csg Lk @ 6286-6336' w/ 125sx cmt

7-7/8" hole @ 9555' 5-1/2" csg @ 9555' DVT @ 5976' w/ 1625sx-TOC-2595'-CBL

Perfs @ 9270-9383'

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

J. Amos 3/6/11



United States Department of the Interior

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Inspection & Enforcement

. . . .

Jim Amos Supervisory Environmental Protection Specialist 575-234-5909, 575-361-2648 (Cell)

Mike Burton Environmental Protection Specialist 575-234-2226

Jeffery Robertson Natural Resource Specialist 575-234-2230

Jennifer Van Curen Environmental Protection Specialist 575-234-5905

Doug Hoag Civil Engineering Technician 575-234-5979

Linda Denniston Environmental Protection Specialist 575-234-5974

Solomon Hughes Natural Resource Specialist 575-234-5951

Permitting

Cody Layton Natural Resource Specialist 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Todd Suter Surface Protection Specialist 575-234-5987

Tanner Nygren Natural Resource Specialist 575-234-5975

Amanda Lynch Natural Resource Specialist 575-234-5922

Legion Brumley Environmental Protection Specialist 575-234-5957

Realty, Compliance

Randy Pair Environmental Protection Specialist 575-234-6240