Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010


OMP	O. 10	70 4 .	-013
Expires:	July	31,	201
ease Serial No.			

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use form 3160-3 (APD) for such proposals.

Multiple-See Attached

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIF	PLICATE - Other instruc	tions on rev	erse side.		7. If Unit or CA/Agree NMNM125386A		ame and/or No.
Type of Well ☐ Gas Well ☐ Oth	er /				8. Well Name and No. WILDCAT 21 LI FE	ED COM	и 1Н
Name of Operator MEWBOURNE OIL COMPAN		JACKIE LATI ewbourne.com	IAN	-	9. API Well No. 30-025-41261-0	0-X1	
3a. Address		Ph: 575-39)	10. Field and Pool, or I ANTELOPE RID		ory
HOBBS, NM 88241		Fx: 575-397	-6252				
4. Location of Well <i>(Footage, Sec., T.</i> Sec 21 T23S R34E NWSW 23 32.289085 N Lat, 103.482580	10FSL 150FWL)			11. County or Parish, a		
12. CHECK APPR	OPRIATE BOX(ES) TO	INDICATE	NATURE OF 1	NOTICE, RI	EPORT, OR OTHER	R DAT	A
TYPE OF SUBMISSION			ТҮРЕ О	F ACTION			
□ Notice of Intent	☐ Acidize	□ Deep			ion (Start/Resume)	_	ater Shut-Off
57 Culmanuant Damont	☐ Alter Casing	☐ Frac	ture Treat	☐ Reclam		_	ell Integrity
Subsequent Report	□ Casing Repair	_	Construction	☐ Recomp	lete	⊠ Ot Well	ther Spud
☐ Final Abandonment Notice	☐ Change Plans	Plug	and Abandon	☐ Tempor	arily Abandon	VV CII	Spud
	□ Convert to Injection	Plug	Back	□ Water D	Pisposal		
testing has been completed. Final Abdetermined that the site is ready for fi 08/05/13 Spud 17 1/2". Ran 11 w/additives. Mixed @ 14.4 #/g #/g w/1.76 yd. Tail w/200 sks 08/08/13. Circ 98 sks of cemermins, held OK. Drilled out with Chart & schematic attached. Bond on file: NM1693 nationw	nal inspection.) 093' of 13 3/8" 48# H40 S w/1.58 yd. Followed with Class C w/1% CaCl2. Mix nt to pit. WOC. At 6:00 AN 12 1/4" bit.	T&C csg. Ce 800 sks Clas ed @ 14.8 #/	mented with 180 ss C w/additives g w/1.34 yd. Plu) sks Thixad . Mixed @ 1 ig down @ 4	Class C HOBE 3.5 :15 AM for 30 SEP ()	s oc	ED 13
14. 1 hereby certify that the foregoing is Comm	Electronic Submission #2	JRNE OIL CO	/IPÁNY, sent to t	he Hobbs	•		
Name (Printed/Typed) JACKIE L	ATHAN		Title AUTHO	RIZED REF	RESENTATIVE		
	• •						
Signature (Electronic S	ubmission)		Date 08/23/2	2013			
	THIS SPACE FO	R FEDERA	L OR STATE	OFFICE U	SE		
Approved By ACCEPT			JAMES A _{Title} SUPERVI				Date 09/01/2013
Conditions of approval, if any, are attached certify that the applicant holds legal or equivalent would entitle the applicant to condu	itable title to those rights in the	not warrant or subject lease	Office Hobbs		Ko		
Title 18 U.S.C. Section 1001 and Title 43 States any false, fictitious or fraudulent s					ake 🕊 any department or	agency	of the United

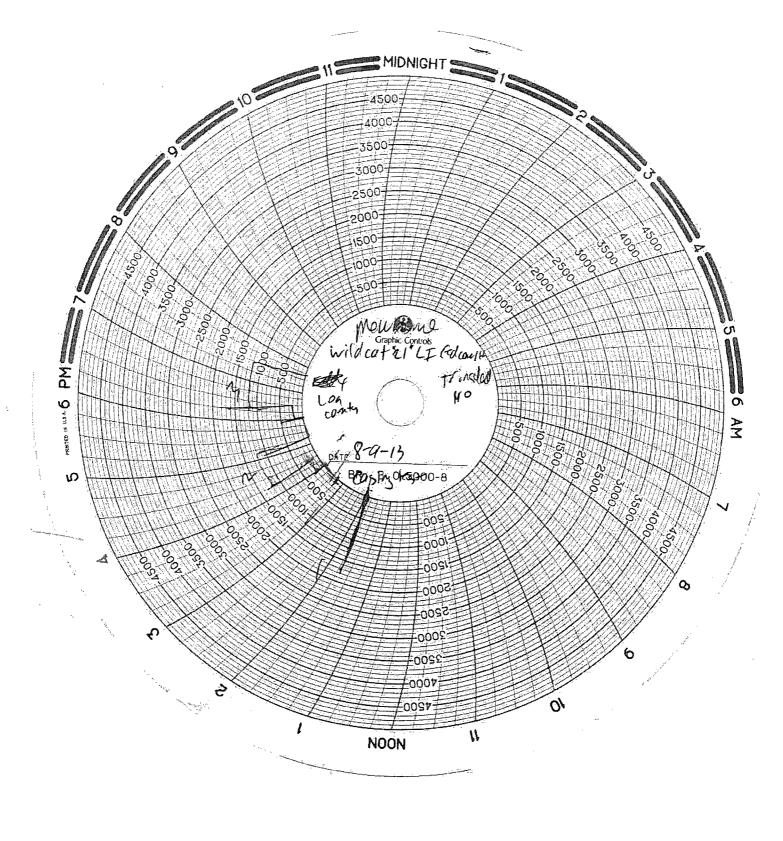

. . .

Janes Carlos Carlos Santos Carlos

. . .

•



WELDING • BOP TESTING NIPPLE UP SERVICE • BOP LIFTS • TANDEM MUD AND GAS SEPARATORS

			7
Pα	¥	Ωf	L
ıg.		O.	

	WELDING SERVICES	Foa	ington, NM	575-39	36-4540	Pg	***************************************	
	Mewbourne		Danies .	w."		1.0	wolce # 6/5	76
ompany : _ ///	11 10+ 21 1 I 6	denull	Date:		Trinada		Rig#	
ase:	112:0	_ Drill Pipe Size		1 1 1 1 1	H Tes	د. در چیمبر استند	10	
ig Size &T)	Distribe Size	••	led BOP:				
quired BO	ng Valve Must Be Open During BOP Test *		11 (3/4)		* Check	Valve Must Be C	Open/Disabled To Tes	t Kill Line Valve
						9		
#11 #10 #	9 #7 #8 Pipe Rams #14	Mud Galvaive Vaive 15 13 125 Super Choke	uge	#26	1BOP #17	ily/op ive	#22 #23 Pump Privalve V	Dart Valve #19 and Pipe Valve #24 TIW Valve #18
	Casing		<u>.</u>		Ç.			anjas isamayanininin
TEST #	TIENS TESTED	TEST LENGTH	LOW PSI	HIGH PSI		. RE	MARKS	N. N
	95 NC 15. 5 4. 59	30 M/3		130	 			
2		1 7 1			200 0		7	/
	(04/15, 25 259)	30/19/11	250	1250	10% 13	od off	for cho	425
3	(041, 15, 25, 25, 9 (05) 7, 13, 26, 25, 9	30mi	250	1250	10% 131	od oh	for the	125
	(041,715, 25, 25, 9 (05) 3, 13, 26, 25, 9			: 1	10% 131	od old	on cho	45
	(04 17 15, 25 25 9 (05) 7, 13 26, 25 9			: 1	10% 131	oal off	for the	
	(04 17, 13, 25, 25, 9 (05) 7, 13, 26, 2/5, 9	30mi.	210	1210		ood off	en cho	<u> </u>
	(04 17, 15, 25, 25, 9 (6) 17, 18, 26, 2/5, 9			: 1	10% 134	od off	for tho	
	(04,715, 25, 25, 9 Cosing, 13, 26, 2/5, 9	30mi.	210	1210		oal off	for the	
	(04 A, 15, 25, 25, 9 (05) 7, 13, 26, 2/5, 9	30mi.	210	1210		ood of	en cho	125
	(04,715, 25, 25, 9 (asig, 13, 26, 2/5, 9)	30mi.	210	1210		od off	f. on tho	
	(04 115, 25, 25, 9 Casing, 18, 26, 2/5, 9	30mi.	210	1210		od of	En cho	
	(04 A, 15, 25, 25, 9 (05) 7, 13, 26, 2/5, 9	30mi.	210	1210		ond off	for the	
	(04 A, 15, 25, 25, 9)	30m-	210	1210		isol of	for the	
	(04 A, 15, 25, 25, 9)	30mi.	210	1210		isolof	En Cho	372
	(04 A, 115, 25, 25, 9)	30mi.	210	1210		isol of	for the	
	(04 A, 115, 25, 25, 9)	30mi.	210	1210		'ond of		
	(04 m. 15, 25, 25, 9 (05) m. 18, 26, 2/5, 9	30m.	210	1210		'ond off		