

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-34056
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Apache Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 303 Veterans Airpark Lane, Suite 3000 Midland, TX 79705		7. Lease Name or Unit Agreement Name Selby Maveety / 302346
4. Well Location Unit Letter <u>N</u> : <u>975</u> feet from the <u>South</u> line and <u>1650</u> feet from the <u>West</u> line Section <u>35</u> Township <u>19S</u> Range <u>36E</u> NMPM County <u>Lea</u>		8. Well Number <u>004</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3608' GL		9. OGRID Number 873
10. Pool name or Wildcat Monument; Abo (46970)		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: PERF & ACIDIZE <input checked="" type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Apache performed the following:

3/04/2013 MIRUSU Push plug to 7460' (PBDT); set new CIBP @ 7285'. Perf Upper Abo @ 6884-88', 7021-27', 31-39', 7092-7102', 7113-18', 45-59', 72-74', 82-88', 91-95', 7200-05', 21-28', 45-48', 59-68' w/2 SPF, 166 holes.
3/06/2013 Acidize Abo 6884'-7268' w/4500 gal 15% HCL Abo Blend. 3/07-12/2013 Swab
3/13/2013 RIH w/prod tbg.
3/14/2013 RIH w/pump & rods.
3/15/2013 Hook up flowline.
3/18/2013 Set 640 Pumping Unit. Leave SI due to Gas Plant shut-down.
3/26/2013 Start well producing to facility. (Current WBD attached.)

Spud Date:

7/19/1997

Rig Release Date:

8/4/1997

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Reesa Fisher

TITLE Sr. Staff Reg Tech

DATE 12/2/2013

Type or print name Reesa Holland Fisher

E-mail address: Reesa.Holland@apachecorp.com

PHONE: (432) 818-1062

For State Use Only

APPROVED BY:

[Signature]

TITLE

Petroleum Engineer

DATE

DEC 11 2013

Conditions of Approval (if any):

DEC 11 2013

GL=3608'
KB=3620'
Spud: 7/19/97

Apache Corporation – Selby Maveety #4

Wellbore Diagram – Current Status

Date : 12/3/2013

API: 30-025-34056

Surface Location K. Grisham



975' FSL & 1650' FWL, Unit
Sec 35, T19S, R36E, Lea County, NM


Surface Casing

8-5/8" 24# K-55 @ 1145' w/ 450 sx to surface

HOBBS OCD

DEC 06 2013

RECEIVED

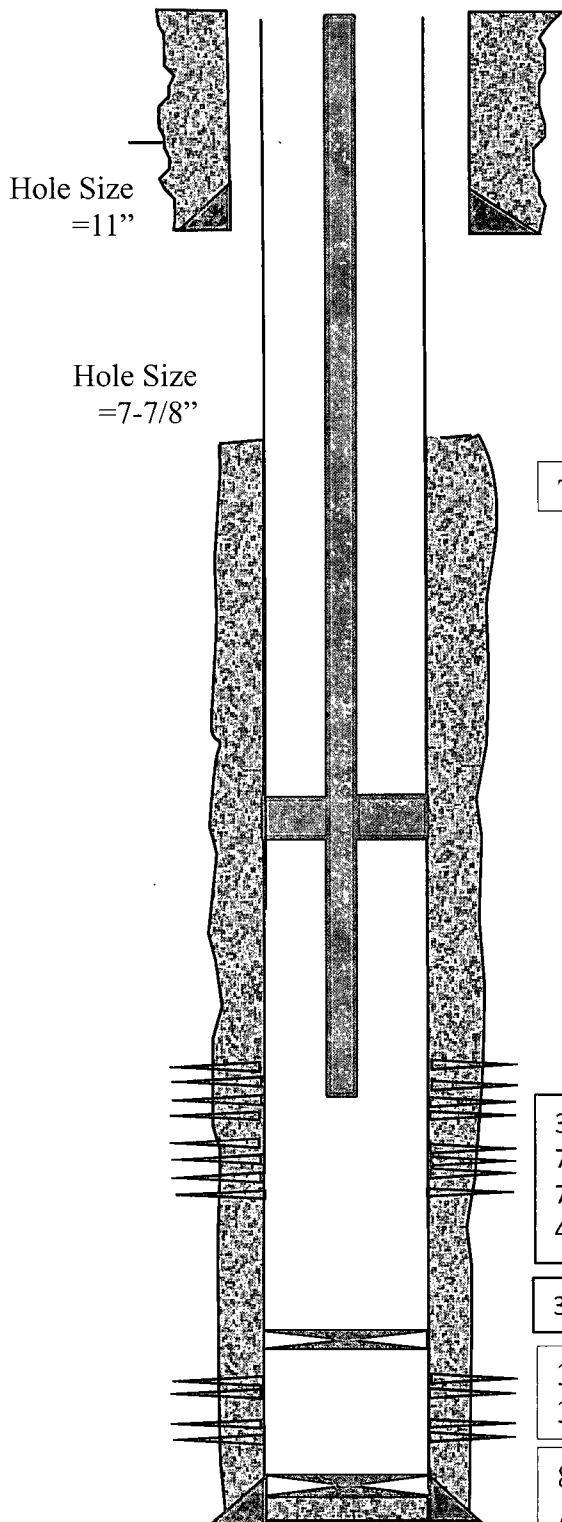

TOC @ 3386'

TAC @ 6855'
SN @ 7249'
EOT @ 7261'

3/13: Perf upr Abo @ 6884-88; 7021-27; 7031-39; 7092-7102; 7113-18; 7145-59; 7172-74; 7182-88; 7191-95; 7200-05; 7221-28; 7245-48 & 7259-68' (166 holes). Acidize w/ 4500 gals 15% HCl. AIR 5.3 BPM @ 4200 psi.

3/13: CIBP @ 7285'

3/01: CIBP @ 7240' Well TA'd
3/13: Pushed plug to 7460'

8/97: Perf Abo @ 7298-7345; 7356-62 w/ 2 jspf (108 holes).
Acidized w/ 7000 gal 15% NEFE HCL

PBTD = 7285'
TD = 7550'

Production Casing

5-1/2" 17# L-80 & 15.5# K-55 & 15.5# J-55 @ 7550' w/ 1150
sxs to surface