

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED  
OMB NO. 1004-0135  
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other	8. Well Name and No. TOMCAT 8 FEDERAL 1
2. Name of Operator DEVON ENERGY PRODUCTION CO LP Contact: ERIN WORKMAN Email: ERIN.WORKMAN@DVN.COM	9. API Well No. 30-025-38367-00-S1
3a. Address 333 WEST SHERIDAN AVE OKLAHOMA CITY, OK 73102	10. Field and Pool, or Exploratory WILDCAT
3b. Phone No. (include area code) Ph: 405-552-7910	11. County or Parish, and State LEA COUNTY, NM
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 8 T23S R32E SWSW 950FSL 570FEL 32.314377 N Lat, 103.690042 W Lon	

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input checked="" type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Devon Energy Production Company, LP respectfully requests approval to squeeze cement to repair casing in the subject well. The following are the procedures we will utilize:

MIRU WSU  
NU BOP & TOH w/ tubing  
Roundtrip Bit and Scraper  
TIH w/ RBP & Packer, Set RBP @ 7500? KBM  
TOH ~30 ft, set packer, test RBP to 500 psi  
Test above packer to 500 psi  
Isolate casing leak within 60 ft. by moving packer uphole and retesting  
Place 50? sand on top of RBP  
TIH and set cement retainer within 50? above damaged casing

**SEE ATTACHED FOR  
CONDITIONS OF APPROVAL**

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #293811 verified by the BLM Well Information System  
For DEVON ENERGY PRODUCTION CO LP, sent to the Hobbs  
Committed to AFMSS for processing by JENNIFER MASON on 03/04/2015 (15JAM0085SE)**

Name (Printed/Typed) ERIN WORKMAN

Title REGULATORY COMPLIANCE PROF.

Signature (Electronic Submission)

Date 03/04/2015

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

**APPROVED**  
MAR 4 2015  
BUREAU OF LAND MANAGEMENT  
CARLSBAD FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

MSS/bcd 3/11/2015

MAR 12 2015

**Additional data for EC transaction #293811 that would not fit on the form**

**32. Additional remarks, continued**

Pump cement squeeze job, TOH with packer & work string, WOC  
TIH with drilling BHA, drill through cement plug, TOH drilling BHA  
TIH with retrieving head, reverse circ out sand, retrieve RBP  
TBIH with production tubing detail  
Return well to production

See COACIT must be  
done after squeeze job.

Thank you!

# ROFF OPERATING COMPANY, LLC

Well Name: TOMCAT 8 FEDERAL #1		Field: DIAMONDTAIL DELAWARE SOUTHWEST	
Location: 950' FSL & 570' FEL; SEC 8-T23S-R32E		County: LEA	State: NM
Elevation: 3624' GL		Spud Date: 7/24/07	Compl Date: 1/1/08
API#: 30-025-38367	Prepared by: Ronnie Slack	Date: 3/13/09	Rev:

TOC @ 210' (CBL)

17-1/2" hole  
13-3/8", 48#, H40, @ 1135'  
 Cmt'd w/940 sx to surface

11" Hole  
8-5/8", 32#, J55, @ 4,534'  
 Cmt'd w/1560 sx to surface

2-7/8" tubing to 7139' (original completion)

11/07-sqzd w/250 sx

## **BRUSHY CANYON** **7306' - 7316'**

7306' - 7316', 500 gals 7.5% HCl, 31K# 20/40 + 19K# 20/40 resin

## **7400' - 7410'**

7400'-7410', 500 gals 7.5% HCl

## **8482' - 8492'**


8482-8492", 1000 gals 15% HCl, 89K# 20/40 + 47K# resin sand

12/05/07- cleaned out to 8636'

7-7/8" Hole  
5-1/2", 15.5# & 17#, J55, @ 8,800'  
 Cmt'd w/950 sx

8721' PBTD

8,800' TD

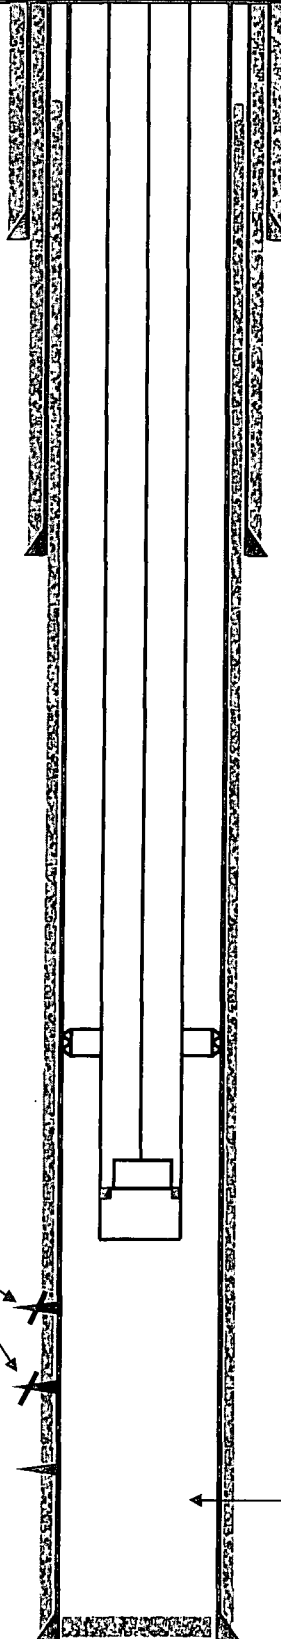

**Tomcat 8 Federal 1**  
**30-025-38367**  
**Devon Energy Production Co., LP**  
**March 04, 2015**  
**Conditions of Approval**

**Notify BLM at 575-393-3612 a minimum of 24 hours prior to commencing work.**

**Work to be completed by June 04, 2015.**

- 1. Operator shall locate damaged casing as requested and preform squeeze job. The subsequent sundry must contain the amount and type of cement used.**
- 2. After squeeze job operator must conduct a casing integrity test. Submit results to BLM. The CIT is to be performed on the production casing per Onshore Oil and Gas Order 2.III.B.1.h. Notify BLM if test fails.**
- 3. Before casing or a liner is added or replaced, prior BLM approval of the design is required. Use notice of intent Form 3160-5.**
- 4. Surface disturbance beyond the originally approved pad must have prior approval.**
- 5. Closed loop system required.**
- 6. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.**
- 7. Operator to have H2S monitoring equipment on location.**
- 8. A minimum of a 3000 (3M) BOP to be used. All blowout preventer (BOP) and related equipment (BOPE) shall comply with reasonable well control requirements. A two ram system with a blind ram and a pipe ram designed for the size of the work string shall be adequate. Tapered work strings will require an additional pipe ram. The manifold shall comply with Onshore Oil and Gas Order #2 Attachment I (3M Diagrams of Choke Manifold Equipment). The accumulator system shall have an immediately available power source to close the rams and retain 200 psi above pre-charge. The pre-charge test shall follow requirements in Onshore Order #2.**
- 9. Subsequent sundry required detailing work done. Operator to include well bore schematic of current well condition when work is complete.**
- 10. See attached for general requirements.**

**JAM 030415**

BUREAU OF LAND MANAGEMENT  
Carlsbad Field Office  
620 East Greene Street  
Carlsbad, New Mexico 88220  
575-234-5972

**General Requirements for Plug Backs**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from this approval.

**If you are unable to plug back the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.**

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Eddy County, call 575-361-2822.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement.

**Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. **Subsequent Plug back Reporting:** Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. **Trash:** All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.