

OBBS OCD  
Hobbs  
MAY 12 2015

ATS-15-29

FORM APPROVED  
OMB No. 1004-0137  
Expires October 31, 2014

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER RECEIVED

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM-90161
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator APACHE CORPORATION (873)		7. If Unit or CA Agreement, Name and No.
3a. Address 303 VETERANS AIRPARK LN #1000 MIDLAND, TX 79705	3b. Phone No. (include area code) 432-818-1167	8. Lease Name and Well No. HAWK FEDERAL B 1 #72 <24427>
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 990' FSL' & 2000' FEL (0) At proposed prod. zone SAME		9. API Well No. 30-025- 42553
14. Distance in miles and direction from nearest town or post office* APPROX 3 MILES NORTH OF EUNICE, NM		10. Field and Pool, or Exploratory WANTZ; ABO <62700>
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No. of acres in lease 640 ACRES	11. Sec., T. R. M. or Blk. and Survey or Area UL: O SEC: 8 T21S R37E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. ~ 325'	19. Proposed Depth 7600'	12. County or Parish LEA
21. Elevations (Show whether DF, KDB, RT, GL, etc.) GL: 3506'	22. Approximate date work will start* As Soon As Approved	13. State NM
23. Estimated duration ~ 10 DAYS		


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) SORINA L. FLORES	Date 9/2/14
---	--	----------------

Title  
SUPV OF DRILLING SERVICES

Approved by (Signature) 	Name (Printed/Typed) STEVE CAFFEY	Date MAY - 6 2015
--	--------------------------------------	----------------------

Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE
------------------------	---------------------------------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

Canitan Controlled Water Basin

Approval Subject to General Requirements  
& Special Stipulations Attached

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

MAY 12 2015

**APACHE CORPORATION (OGRID: 873)**  
**HAWK FEDERAL B 1 #72**

**HOBBS OCD**  
**MAY 12 2015**  
**RECEIVED**

**1. Geologic Formations**

TVD of target	7600'	Pilot hole depth	N/A
MD at TD:	7600'	Deepest expected fresh water:	65'

**Back Reef**

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Aeolian	Surface	Water	
Rustler	1284'	Water	
Top of Salt	1360'	Salt	
Tansill	2517'	Barren	
Yates	2664'	Oil, Gas, Water	
Queen	3387'	Oil, Gas, Water	Loss circ
Grayburg	3721'	Oil, Gas, Water	Loss circ
San Andres	4118'	Oil, Gas, Water	Loss circ
Glorieta	5178'	Oil, Gas, Water	
Blinberry	5697'	Oil	
Tubb	6236'	Oil	
Drinkard	6574'	Oil	
ABO	6837'	Target Zone	
TD	7600'		

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

**2. Casing Program**

See 50A

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
11"	0	1310' 1350'	8-5/8"	24	J55	STC	2.25	1.40	7.97
7-7/8"	0	7600'	5-1/2"	20	P110	LTC	3.07	3.20	3.61
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	N/A
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	

# APACHE CORPORATION (OGRID: 873)

## HAWK FEDERAL B 1 #72

Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

### 3. Cementing Program

Casing	#Sks	Wt. lb/ gal	Yld ft <sup>3</sup> / sack	H <sub>2</sub> O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	275	13.5	1.75	8.962	10	Lead: Class C + 2% CaCL <sub>2</sub> + 4% Bentonite
	200	14.8	1.34	6.31	8	Tail: Class C + 1% CaCL <sub>2</sub>
Prod.	700	12.6	2.0	10.57	12	Lead: 35/65 Poz C + 5% Salt + 0.25% Retarder + 6% Bentonite
	DV/ECP Tool : N/A					Tail: 50:50 Poz C + 5% Salt + 0.25% Retarder + 2% Bentonite
	300	12.4	1.31	5.61	9	

*\*\*If DVT used: DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.*

Casing String	TOC	% Excess
Surface	0'	100%
Production	0'	35%

Include Pilot Hole Cementing specs:

Pilot hole depth: N/A

KOP: N/A

Plug top	Plug Bottom	% Excess	No. Sacks	Wt. lb/gal	Yld. ft <sup>3</sup> /sack	Water gal/sk	Slurry Description and Cement Type

# APACHE CORPORATION (OGRID: 873)

HAWK FEDERAL B 1 #72

## 4. Pressure Control Equipment

must test to 3,000PSI

NO A variance is requested for the use of a diverter on the surface casing. See attached for schematic.

See CJA

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
7-7/8"	11"	2M 3M	Annular	x	50% of working pressure  2M 3M
			Blind Ram	x	
			Pipe Ram	x	
			Double Ram		
			Other*		

\*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low & the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional & tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock & floor safety valve (inside BOP) & choke lines and choke manifold. See attached schematics.

NO	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil & Gas Order #2 III.B.1.i.
NO	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs & hydrostatic test chart.
Y/N	Are anchors required by manufacturer?
NO	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. <ul style="list-style-type: none"> <li>Provide description here</li> </ul> See attached schematic.

## 5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. shoe	FW	8.8 - 9.2	28 - 36	N/C
Surf shoe	TD	Brine	9.8 - 10.0	28 - 29	N/C

Sufficient mud materials to maintain mud properties & meet minimum lost circulation & weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

**APACHE CORPORATION (OGRID: 873)****HAWK FEDERAL B 1 #72****6. Logging and Testing Procedures**

<b>Logging, Coring and Testing</b>	
X	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

<b>Additional logs planned</b>	<b>Interval</b>
X	Resistivity
X	Density
X	CBL
	Mud log
	PEX
	Int. shoe to TD
	Int. shoe to TD
	Production casing
	Intermediate shoe to TD

**7. Drilling Conditions**

<b>Condition</b>	<b>Specify what type and where?</b>
BH Pressure at deepest TVD	3150 psi
Abnormal Temperature	NO

Mitigation measure for abnormal conditions. Describe: Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H <sub>2</sub> S) monitors will be installed prior to drilling out the surface shoe. If H <sub>2</sub> S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
<input checked="" type="checkbox"/>	H <sub>2</sub> S is present
<input type="checkbox"/>	H <sub>2</sub> S Plan attached

**8. Other facets of operation**

Is this a walking operation? If yes, describe. N/A

Will be pre-setting casing? If yes, describe. N/A

Attachments

N/A Directional Plan

N/A Other, describe

APACHE BOP AND CHOKE MANIFOLD SCHEMATIC


11" 3M PSI BOP (to be tested as a 2M) *must be tested to 3,000psi.*

11" 3M PSI BOP ~~(to be tested as a 2M)~~

## EXHIBIT #3

All valves & lines on choke manifold are 2" unless noted

Exact manifold configuration may vary


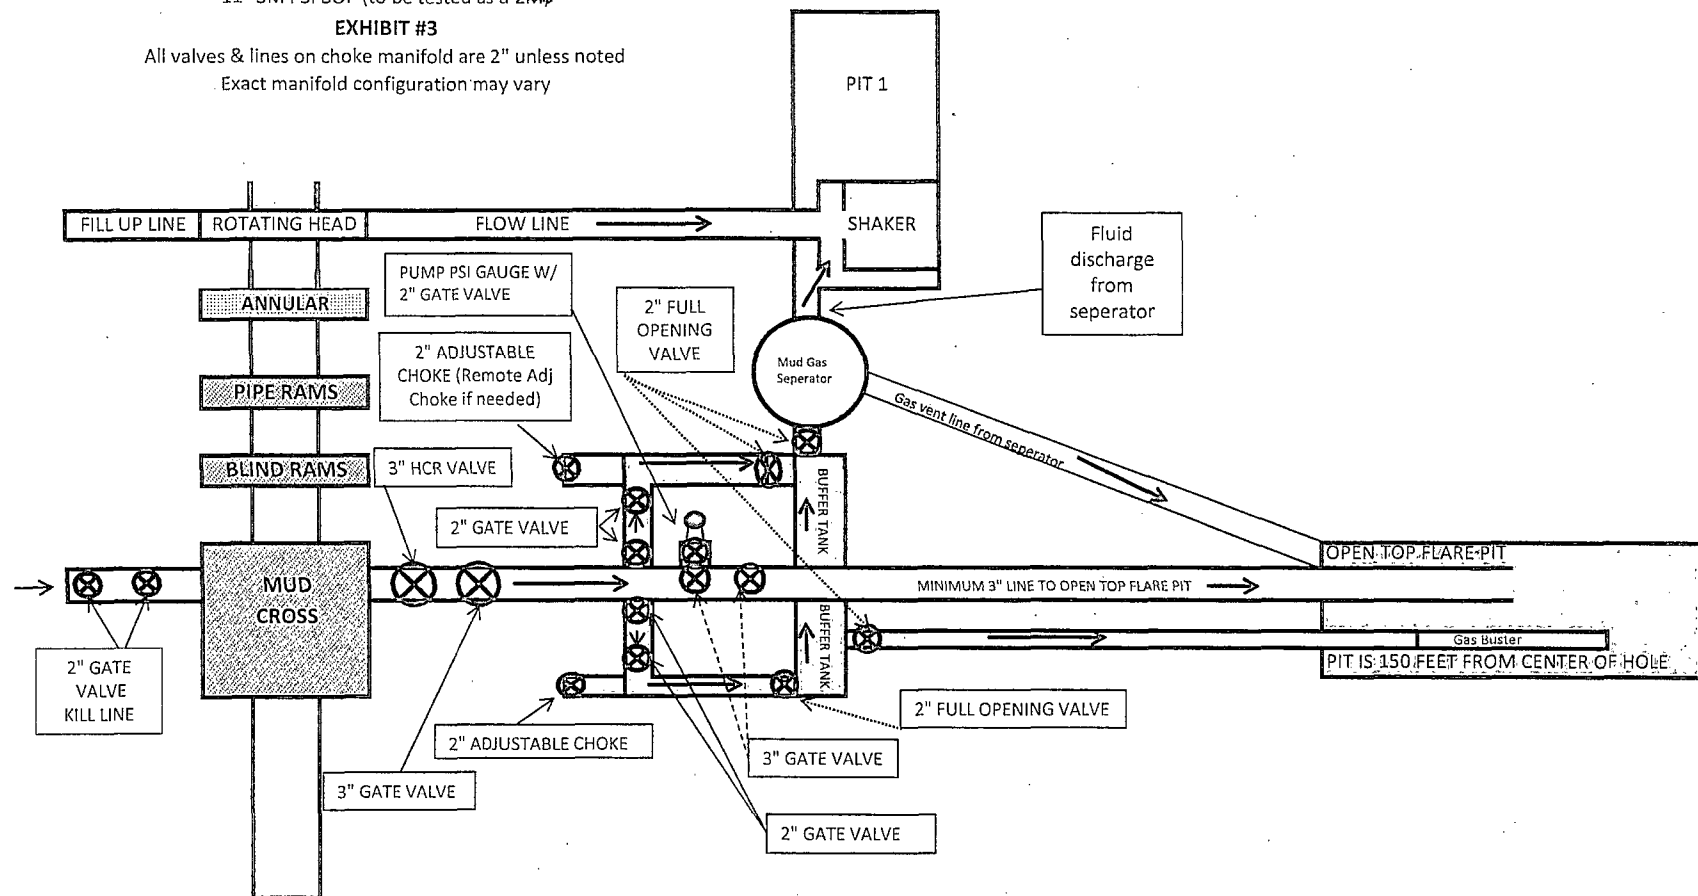


\*\*\* If H2S is encountered in quantities greater than 100ppm, Apache will shut in well & install a remote operated choke \*\*\*

## Closed Loop Equipment Diagram


Exhibit 4

HAWK FEDERAL B-1 #72

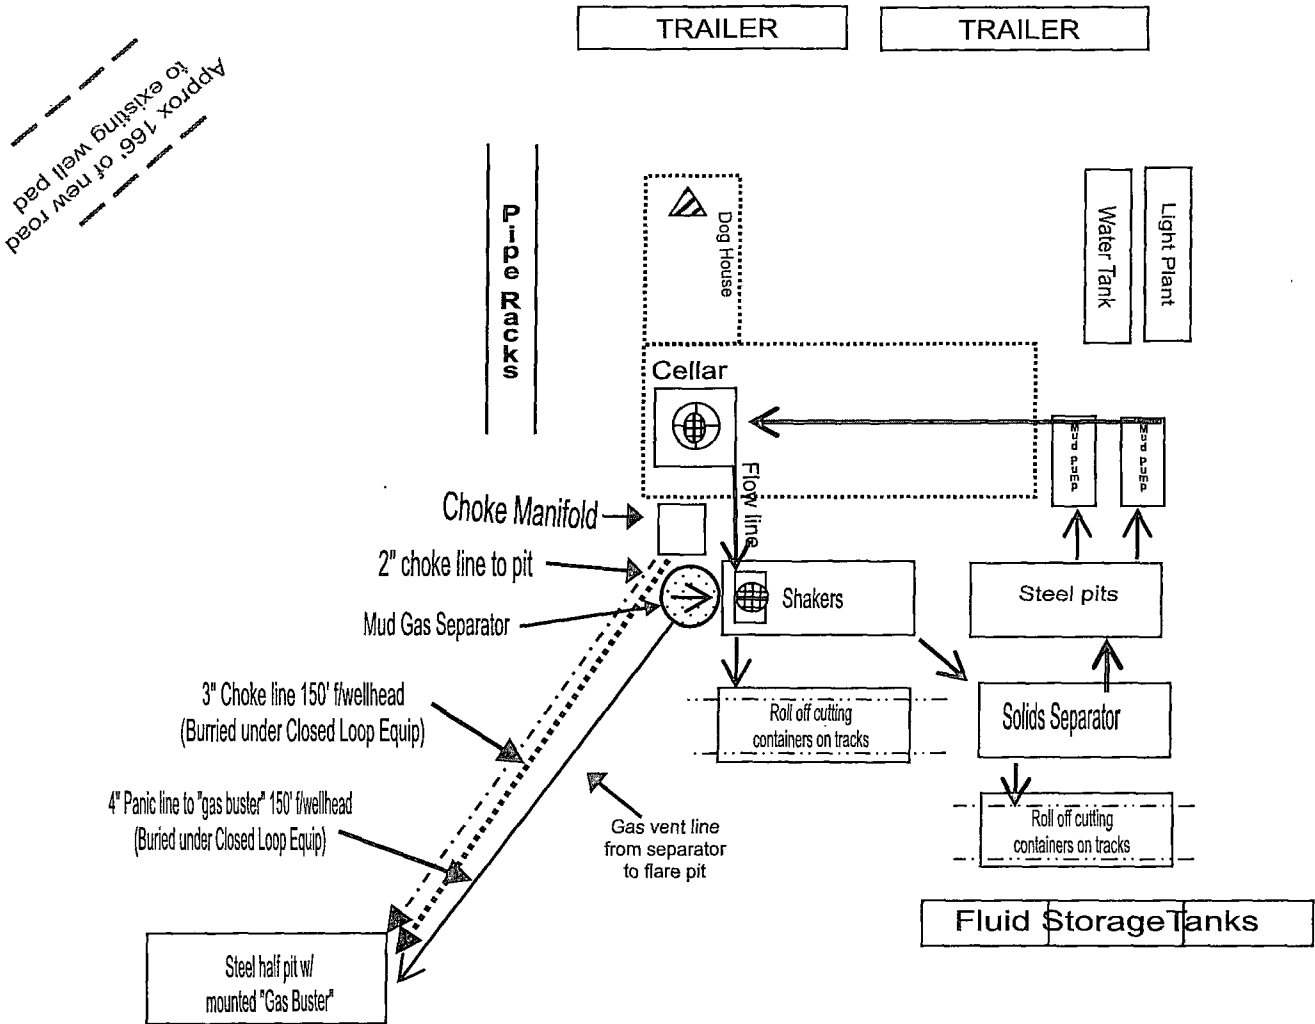


**RIG ORIENTATION & LAYOUT**  
**HAWK FEDERAL B-1 #72**

**EXHIBIT 5**



**V DOOR**

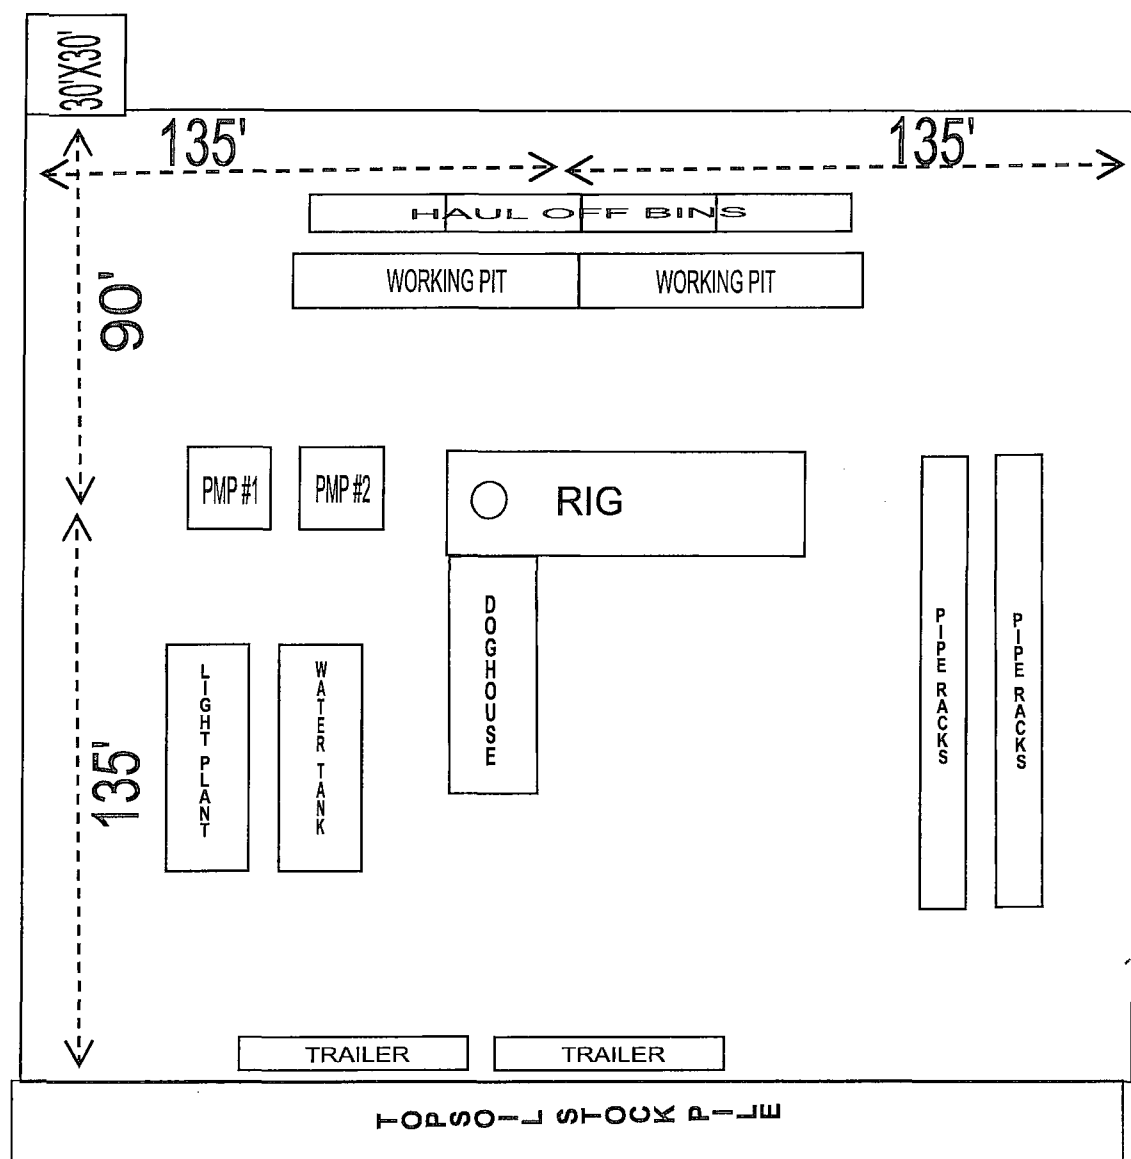

Approx 166' of new road  
to existing pad

## INSTRUCTIONS

**GENERAL:** This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

**ITEM 1:** If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

**ITEM 4:** Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

**ITEM 14:** Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

**ITEMS 15 AND 18:** If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

**ITEM 22:** Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

## NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

**AUTHORITY:** 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

**PRINCIPAL PURPOSES:** The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

**ROUTINE USE:** Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Carlsbad Field Office  
620 E. Greene Street  
Carlsbad, NM 88220

STATEMENT ACCEPTING RESPONSIBILITY FOR OPERATIONS

Operator Name: APACHE CORPORATION  
Street or Box: 303 VETERANS AIRPARK LANE, STE. 1000  
City, State: Midland, TX  
Zip Code: 79705

The undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted on the leased land or portion thereof, as described below:

Lease No: NMNM-90161 HAWK FEDERAL B 1 #72

Legal Description of Land: 990' FSL & 2000' FEL

UL: 0 Section: 8 Township: 21S Range: 37E

County: LEA State: NM

Bond Coverage: \$150,000

Statewide Oil and Gas Surety Bond, APACHE CORPORATION.

BLM Bond File No.: BLM-CO-1463 NATIONWIDE / NMB000736

Signature: Bobby L Smith Printed Name: BOBBY L. SMITH

Title: DRILLING MANAGER, PERMIAN REGION

Date: 9/2/14

**PRIVATE SURFACE OWNER AGREEMENT**

OPERATOR: APACHE CORPORATION

WELL NAME: HAWK FEDERAL B 1 #72

UL: 0 SECTION: 8 TOWNSHIP: 21S RANGE: 37E

LOCATION: 990' FSL & 2000' FEL COUNTY: LEA STATE: NM

LEASE NUMBER: NMNM-90161

**STATEMENT OF SURFACE USE**

The surface to the subject land is owned by Millard Deck Estate, c/o Bank of America NA, Trustee of Millard Deck Testamentary Trust under Last Will & Testament of Millard Deck, ATTN: Jeff Petter, Asst VP, US Trust-Farm & Ranch, Bank of America Private Wealth Mgmt, PO Box 270, Midland, TX 79702 (303 W. Wall St, Midland, TX 79701) 432-688-7926

The surface owner has been contacted regarding the drilling of the subject well, and an agreement for surface use has been negotiated.

CERTIFICATION: I hereby certify that the statements made in this statement are to the best of my knowledge, true and correct.

NAME: MAXWELL GROVE

SIGNATURE: 

DATE: 08/17/2014

TITLE: DRILLING ENGINEER

To expedite your Application to Drill please fax the completed form to the  
Bureau of Land Management (575) 234-5927 or (575) 885-9264  
Attn: Legal Instruments Examiner  
620 E. Green Street  
Carlsbad, NM 88220

The original document with signature should be mailed as soon as possible.