UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

OCD Hobbs

FORM APPROVED OMB NO. 1004-0135

Expires: July 31, 2010

5.	Lease Serial No.
	NMNM122622

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRI	7. If Unit or CA/Agre	eement, Name and/or No.			
Type of Well	her		8. Well Name and No. ENDURANCE 36 STATE COM 704H		
2. Name of Operator EOG RESOURCES, INC. ✓	Contact: S* E-Mail: stan_wagner	TAN WAGNER @eogresources.com	9. API Well No. 30-025-43015	/	
3a. Address P.O. BOX 2267 MIDLAND, TX 79702	i	Bb. Phone No. (include area code Ph: 432-686-3689	WILDCAT WOLFCAMP OIL		
4. Location of Well (Footage, Sec., T	C., R., M., or Survey Description)		11. County or Parish	, and State	
Sec 36 T26S R33E SWNW 36	60FSL 1020FWL /	MAY 0 5 201	6 LEA COUNTY,	NM .	
12. CHECK APPI	ROPRIATE BOX(ES) TO I	NDICATENATIRE	NOTICE, REPORT, OR OTHE	ER DATA	
TYPE OF SUBMISSION		TYPE C	OF ACTION		
Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☑ Notice of Intent	☐ Alter Casing	☐ Fracture Treat	☐ Reclamation	☐ Well Integrity	
☐ Subsequent Report	☐ Casing Repair	■ New Construction	Recomplete	⊠ Other	
☐ Final Abandonment Notice	☐ Change Plans	☐ Plug and Abandon	□ Temporarily Abandon	Change to Original A	
	☐ Convert to Injection	☐ Plug Back	■ Water Disposal		
testing has been completed. Final Al determined that the site is ready for final EOG Resources requests an a Change BHL from 230' FNL &	pandonment Notices shall be filed inal inspection.) amendment to our approved	only after all requiréments, includ APD for this well to reflect 992' FWL, 25-26S-33E	completion in a new interval, a Form 31 ding reclamation, have been completed at a change in BHL.		
14. I hereby certify that the foregoing is	Electronic Submission #333 For EOG RES	2526 verified by the BLM We SOURCES, INC., sent to the processing by ASHLEY PE	Hobbs		
Name (Printed/Typed) STAN WA	GNER	Title REGU	Title REGULATORY ANALYST		
Signature (Electronic S	Submission)	Date 02/29/2	2016		
	THIS SPACE FOR	FEDERAL OR STATE	OFFICE USE		
2 4 11	1 -1	P	1 / 6 .	5/1/200	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease

which would entitle the applicant to conduct operations thereon.

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED

Office

Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

SUNDRY	5. Lease Serial No.	5. Lease Serial No. NMNM122622			
Do not use thi abandoned we	6. If Indian, Allottee	6. If Indian, Allottee or Tribe Name			
SUBMIT IN TRI	7. If Unit or CA/Ag	7. If Unit or CA/Agreement, Name and/or No.			
1. Type of Well	8. Well Name and N ENDURANCE 3	o. 36 STATE COM 704H			
☐ Oil Well ☐ Gas Well ☐ Oth ☐ Oth ☐ Oth		STAN WAGNER			
EOG RESOURCES INCORPO	ORATEDE-Mail: stan_wagn	er@eogresources.com		9. API Well No. 30-025-43015-00-X1	
3a. Address		3b. Phone No. (include area code Ph: 432-686-3689			
MIDLAND, TX 79702		111. 402-000-0005	WO-025 C05	02000270	
4. Location of Well (Footage, Sec., T	, R., M., or Survey Description) in the state of	11. County or Parish, and State		
Sec 36 T26S R33E Lot 4 360	FSL 1020FWL /		LEA COUNTY, NM		
12. CHECK APPI	ROPRIATE BOX(ES) TO	INDICATE NATURE OF	NOTICE, REPORT, OR OTH	ER DATA	
TYPE OF SUBMISSION		TYPE C	F ACTION		
Notice of Intent	☐ Acidize	Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
■ Notice of Intent	☐ Alter Casing	☐ Fracture Treat	☐ Reclamation	■ Well Integrity	
☐ Subsequent Report	☐ Casing Repair	■ New Construction	☐ Recomplete	⊠ Other	
☐ Final Abandonment Notice	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Change to Original A	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	10	
Attach the Bond under which the wor following completion of the involved testing has been completed. Final At determined that the site is ready for fit EOG Resources requests performed from the site is ready for fit in	rk will be performed or provide operations. If the operation repandonment Notices shall be filtinal inspection.) mission to use a multi-bounce casing, a 13-5/8" BOF the wellhead system and retest. ated at least every 30 days are of the BOP and related the installed by vendor's regam Flo FBD100 Multi-Bounce and correct. Electronic Submission # For EOG RESOUmitted to AFMSS for process.	the Bond No. on file with BLM/BI sults in a multiple completion or receded only after all requirements, included with wellhead system for this work BOPE system with a minimal will be pressure tested to 25 ys, as per Onshore Order No. BOPE required for drilling between the boresentative(s). A copy of WH system has been sent the BLM WORCES INCORPORATED, sent passing by PRISCILLA PEREZ (1997).	um working pressure 50 psi low 2. elow the surface to the NM BLM	be filed within 30 days 160-4 shall be filed once	
Signature (Electronic S		Date 04/27/2		116	
	THIS SPACE FO	OR FEDERAL OR STATE	OFFICE USE		
Approved By Approval, if any, are attached	Approval of this notice does	not warrant or	when Engineer	Date 5/1/201	
certify that the applicant holds legal or equivalent would entitle the applicant to condu	itable title to those rights in the		adstrad Freda	office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional data for EC transaction #337626 that would not fit on the form

32. Additional remarks, continued

office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. Prior to running the intermediate casing, the rams will be changed out to accommodate the 7-5/8" casing. The bonnet seals will be tested to 1500 psi. After installing the intermediate casing the casing rams will be removed and replaced with variable bore rams. The remaining BOPE will not be retested after installing the intermediate casing.

SEE COA

Both the surface and intermediate casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft. or 1500 psi, whichever is greater.

Wellhead drawing attached.


Endurance 36 State Com 704H 30-025-43015

EOG Resources, Inc Surface Location: Sec. 36, T. 26S, R. 33E Conditions of Approval

See below for the conditions of approval for the multi-bowl wellhead system.

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
- 2. Operator has proposed a **multi-bowl wellhead assembly**. This assembly (BOPE/BOPE) will be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.
 - c. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - d. Manufacturer representative shall install the test plug for the initial and all BOP testing.
 - e. Prior to running the intermediated casing, the rams will be changed out to accommodate the 7-5/8" casing. After installing the intermediate casing the casing rams will be removed and replaced with variable bore rams.
- 3. Operator has broken a seal on the BOP stack therefore per Onshore Oil and Gas Order No. 2 the entire BOP stack shall be tested prior to drilling out the intermediated casing.
 - a. A solid steel body pack-off will be utilized after running & cementing the intermediate casing. After installation of the pack-off and lower flange will be pressure tested to 5000 psi.
 - b. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

KGR 05012016

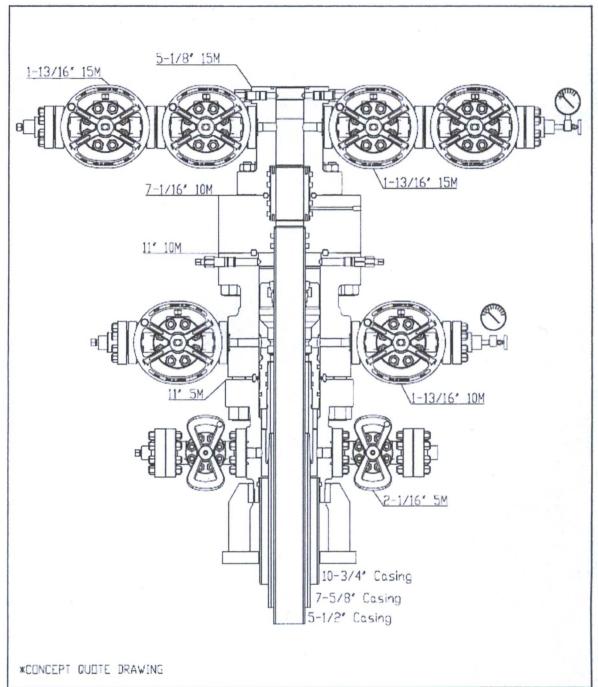

EDG RESDRCES

10-3/4" X 7-5/8" X 5-1/2" FBD-100 WELLHEAD SYSTEM QUDTE # - 93482

DWN	BAY	1/28/16
CHK	(
APP		
	BY	DATE



DRAWING NO WH-15848