

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-33082
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. V-3527
7. Lease Name or Unit Agreement Name Red Tank 31 State
8. Well Number 1
9. OGRID Number 16696
10. Pool name or Wildcat Red Tank Delaware, West
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3758'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

OXY USA Inc.

3. Address of Operator

P.O. Box 50250 Midland, TX 79710

4. Well Location

Unit Letter D : 330 feet from the North line and 330 feet from the West line
Section 31 Township 22S Range 33E NMPM County Lee

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3758'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT R

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

INT TO PA PMX
P&A NR
P&A R

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.1 : NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-9010' PBD-5600' Perfs-5410-5460' CIBP-5610'

10-3/4" 40.5# csg @ 816' w/ 700sx, 14-3/4" hole, TOC-Surf-Circ

7-5/8" 26.4# csg @ 4740' w/ 970sx, 9-7/8" hole, TOC-Surf-Circ

4-1/2" 11.65.5# csg @ 9010', DVT @ 6360' w/ 780sx, 6-3/4" hole, TOC-3590'-CBL

1. RIH & set CIBP @ 5360', M&P 25sx cmt

2. M&P 25sx cmt @ 4790-4600' WOC-Tag

3. Perf @ 2785', sqz 30sx cmt to 2685' WOC-Tag

4. Perf @ 866', sqz 30sx cmt 766' WOC-Tag

5. Perf @ 250', sqz 60sx cmt to surface

10# MLF between plugs - Above ground steel tanks will be utilized

, Pressure test csg.

VERIFY CMT TO SURFACE ALL STRINGS

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 1/30/17

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark Whitman TITLE Petroleum Engr. Specialist DATE 02/02/2017

Conditions of Approval (if any):

OXY USA Inc. - Proposed
Red Tank 31 State #1
API No. 30-025-33082

60sx @ 250'-Surface

30sx @ 866-766' WOC-Tag

30sx @ 2785-2685' WOC-Tag

25sx @ 4790-4600' WOC-Tag

CIBP @ 5360' w/ 25sx

CIBP @ 5610' w/ 10' cmt to 5600'


45sx @ 6738-6080' Tagged

CIBP @ 6738'

2005-CIBP @ 8000'

1998-CIBP @ 8830'

PB-8972'

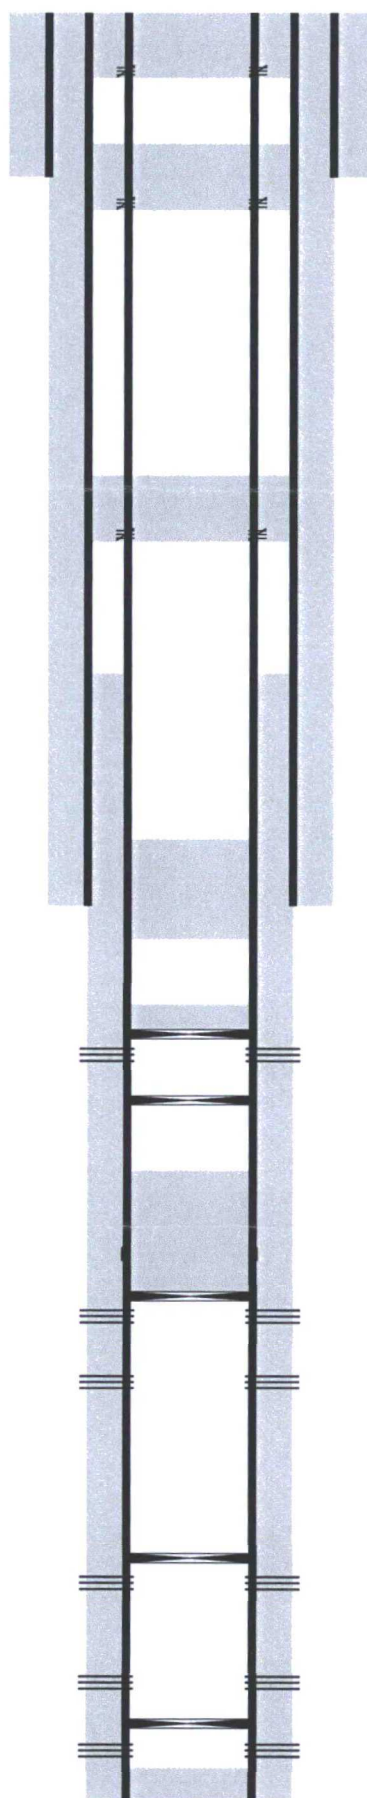

Perf @ 250'

Perf @ 866'

Perf @ 2785'

Perfs @ 5410-5460'

Sqz csg lk @ 6294-6326' w/ 100sx cmt

Perfs @ 6788-6796'

Perfs @ 7046-7056'

Perfs @ 8081-8095'

Perfs @ 8614-8634'

Perfs @ 8870-8914'


14-3/4" hole @ 816'
10-3/4" csg @ 816'
w/ 700sx-TOC-Surf-Circ

9-7/8" hole @ 4740'
7-5/8" csg @ 4740'
w/ 970sx-TOC-Surf-Circ

6-3/4" hole @ 9010'
4-1/2" csg @ 9010'
DVT @ 6360'
w/ 780sx-TOC-3590'-CBL

TD-9010'

OXY USA Inc. - Current
Red Tank 31 State #1
API No. 30-025-33082

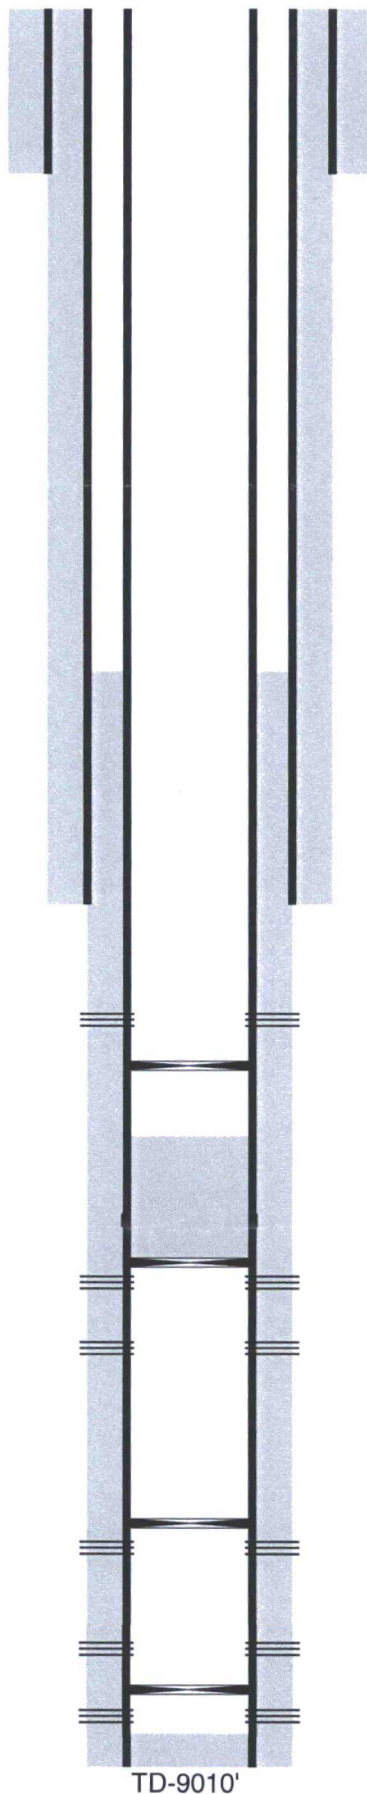

14-3/4" hole @ 816'
10-3/4" csg @ 816'
w/ 700sx-TOC-Surf-Circ

9-7/8" hole @ 4740'
7-5/8" csg @ 4740'
w/ 970sx-TOC-Surf-Circ

Perfs @ 5410-5460'

Sqz csg lk @ 6294-6326' w/ 100sx cmt

Perfs @ 6788-6796'

Perfs @ 7046-7056'

6-3/4" hole @ 9010'
4-1/2" csg @ 9010'
DVT @ 6360'
w/ 780sx-TOC-3590'-CBL

Perfs @ 8081-8095'

Perfs @ 8614-8634'

Perfs @ 8870-8914'

CIBP @ 5610' w/ 10' cmt to 5600'

45sx @ 6738-6080' Tagged

CIBP @ 6738'

2005-CIBP @ 8000'

1998-CIBP @ 8830'

PB-8972'

TD-9010'