

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

| | |
|---|---|
| WELL API NO. 30-025-07556 | / |
| 5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> | / |
| 6. State Oil & Gas Lease No. 19552 | |
| 7. Lease Name or Unit Agreement Name North Hobbs (G/SA) Unit | / |
| 8. Well Number: 411 | / |
| 9. OGRID Number: 157984 | / |
| 10. Pool name or Wildcat Hobbs (G/SA) | / |

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other: ~~Injector~~

2. Name of Operator
Occidental Permian Ltd.

3. Address of Operator
P.O. Box 4294, Houston, TX, 77210

4. Well Location
Unit Letter A : 660 feet from the North line and 660 feet from the East line
Section 33 Township 18S Range 38E NMPM Lea County /

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3642' (GL)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

INT TO P&A PM
P&A NR
P&A R

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRU PU
- POOH and LD w/ RPB at 2561'
- Tag capped CIBP @ 3915' SPOT 25 SX CMT
- Circulate 12# Plugged mud PRESSURE TEST CASING
- Perf and sqz 100 sx of cmt from 2750' (11' below intermediate csg shoe). WOC and Tag (Yates / Csg Shoe plugs) 2789' (50' BELOW)
- Perf and sqz 100 sx of cmt from 1658' WOC and Tag (Rustle plug)
- Perf at 350' and sqz 200 sx circulate to surface. Top-off as necessary (Surface plug)
- Cut off wellhead and install dry hole marker with labeling
- Clean up location, remove anchors

During this procedure we plan to use the closed-loop system with a steel tank and haul contents to the required disposal per ODC Rule 19.15.17

Verify cement to surface all strings

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Production Engineer DATE 02/13/2018

Type or print name Carlos Restrepo E-mail address carlos_restrepo@oxy.com PHONE: 713-838-5772

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 02/13/2018

Conditions of Approval (if any):


C103 INTENT TO P&A EXPIRES
02/13/2019

NHU 33-411

API# 30-025-07556

TWN 18-S; RNG 38-E

P&A'd Well

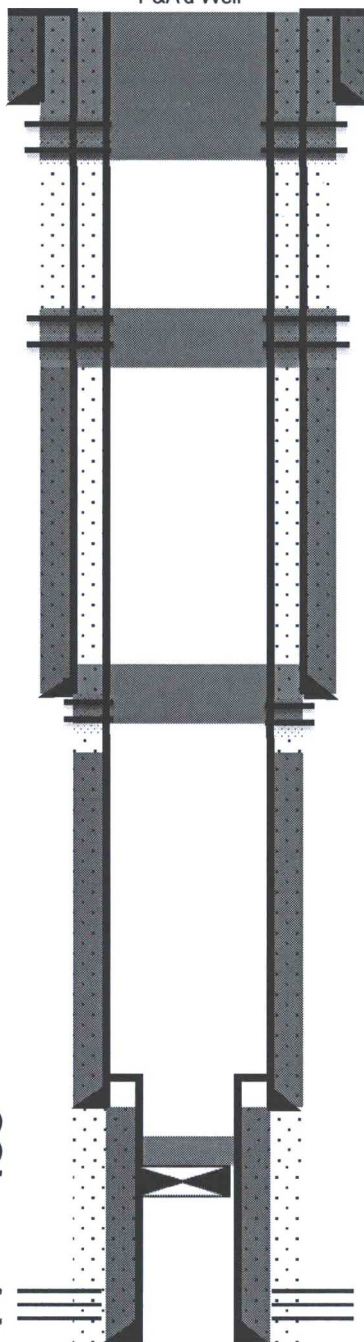

13-3/8" 54.5# @ 285'
cmt'd w/ 200 sxs
TOC @ Surf (Circ.)

Perf at 350 and Sqz 200 sx from 400'
(Surface Plug)

Perf at 1608 and Sqz 100 sx from 1558' to
1658'
(Rustle Plug)

Tops:
Rustler: 1608'
Salt: 1690'
Yates: 2727'
B. Grayburg: 3915'
San Andres: 4017'

Perf and Sqz 100 sx from 2700' to 2800'
(Yates / Csg Shoe Plug)

9-5/8" 36# @ 2739'
cmt'd w/350 sxs
TOC @ 1723' (Calc.)

TOC at 3915' (tagged)
(85' cement)
CIBP SA 4000'

7" 24# @ 3970'
cmt'd w/150 sxs
TOC @ 3260' (CBL)

SQZD Perfs 4020-4058'
Plugged Back: 4095-4170'

5-1/2" 14# @ 3919-4175'
cmt'd w/40 sxs
TOC @ 3964 (TS)

PBTD @ 3915'
TD @ 4240'


NHU 33-411

API# 30-025-07556

TWN 18-S; RNG 38-E
Producer ESP - TA'd

Tops:

Rustler: 1608'
Salt: 1690'
Yates: 2727'
B. Grayburg: 3915'
San Andres: 4017'

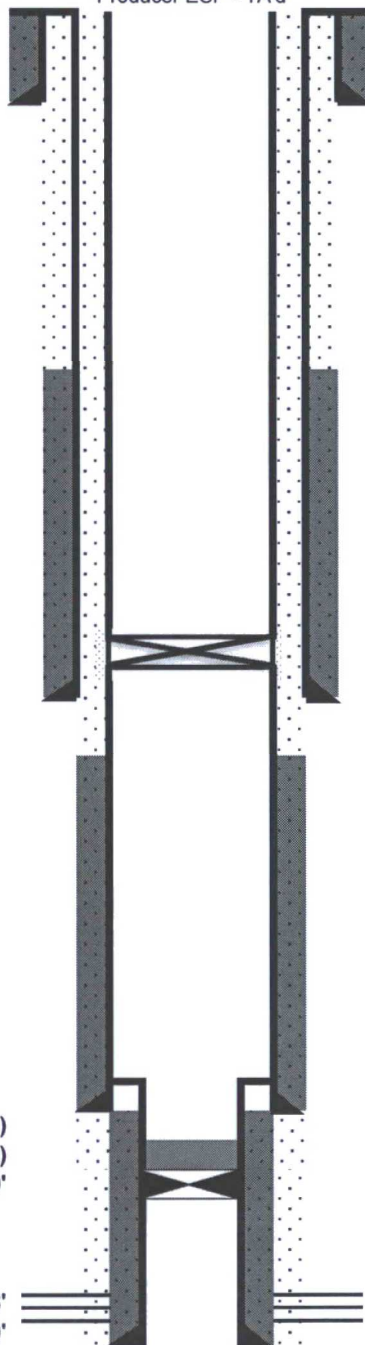

13-3/8" 54.5# @ 285'
cmt'd w/ 200 sxs
TOC @ Surf (Circ.)

9-5/8" 36# @ 2739'
cmt'd w/350 sxs
TOC @ 1723' (Calc.)

7" 24# @ 3970'
cmt'd w/150 sxs
TOC @ 3260' (CBL)

TOC at 3915' (tagged)
(85' cement)
CIBP SA 4000'

SQZD Perfs 4020-4058'
Plugged Back: 4095-4170'

5-1/2" 14# @ 3919-4175'
cmt'd w/40 sxs
TOC @ 3964 (TS)

PBTD @ 3915'
TD @ 4240'