

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources
HOBBS OGD
CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
APR 02 2018
RECEIVED

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-03825
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other Injector		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Chevron USA INC		6. State Oil & Gas Lease No. B 2359-1
3. Address of Operator 6301 DEAUVILLE BLVD., MIDLAND, TX 79706		7. Lease Name or Unit Agreement Name Lovington Paddock Unit
4. Well Location Unit Letter <u>B</u> : <u>660</u> feet from the <u>North</u> line and <u>2,080</u> feet from the <u>East</u> line Section <u>1</u> Township <u>17S</u> Range <u>36E</u> NMPM County <u>Lea</u>		8. Well Number: 48
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,836' DF, 3,823' GL		9. OGRID Number <u>4323</u> 241333
		10. Pool name or Wildcat Lovington Paddock

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBS/	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK	SING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILL	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT	
DOWNHOLE COMMINGLE <input type="checkbox"/>		INT TO PA <u>PM</u>	
		P&A NR	
		P&A R	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 13-3/8" @ 297' TOC Surface, 8-5/8" @ 3,737' TOC 602' (TS), 5-1/2" @ 6,030' TOC 3,712' (TS), OH f/ 6,030' t/ 6,260'.

Chevron USA INC respectfully request to re-abandon this well as follows:

1. Call and notify NMOCD 24 hrs before operations begin. Check all casing pressures, discuss with engineer if pressure is noted on the intermediate or surface casing. Perform bubble test as necessary to verify zero pressure.
2. Kill well (may need to shoot tbg punches), unset and pull AD-1 packer and tbg, set CIBP @ 5,950', spot MLF, test csg, spot 25 sx CL "C" cmt f/ 5,950' t/ 5,703', WOC & tag only if csg does not test.
3. Spot 45 sx CL "C" cmt f/ 4,632' t/ 4,208' (San Andres, Grayburg).
4. Attempt to perf @ 3,917' and sqz 55 sx CL "C" cmt f/ 3,687' t/ 3,917', WOC & tag (Queen, Shoe).
5. Perf @ 3,320' and sqz 100 sx CL "C" Gas Block cmt f/ 2,906' t/ 3,320', WOC & tag (7 Rivers, Yates). Prior to next P&S, re-verify no pressures on intermediate or surface casing strings.
6. Perf @ 2,085' and sqz 35 sx CL "C" cmt f/ 1,935' t/ 2,085', WOC & tag (B.Salt). 2000'
7. Perf @ 347' through prod & interm csg strings and sqz 220 sx CL "C" cmt f/ Surface t/ 347' (Shoe).
8. Cut all casings & anchors & remove 3' below grade. Verify cement to surface on all casing strings & weld on dry hole marker. Clean location.

Note: All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Howie Lucas TITLE Well Abandonment Engineer, Attorney-in-Fact DATE 4/2/18

Type or print name Howie Lucas E-mail address: howie.lucas@chevron.com PHONE: (832)-588-4044

For State Use Only
APPROVED BY: Mark White TITLE Petroleum Engr. Specialist DATE 04/05/2018


Conditions of Approval (if any):

C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL

Well: Lovington Paddock Unit 48
 Field: Lovington
 Reservoir: Paddock

API: 30-025-03825
 St.: New Mexico
 Loc: 660' FNL and 2080' FEL

Sec: 1
 Tws: 17S
 Rng: 36E

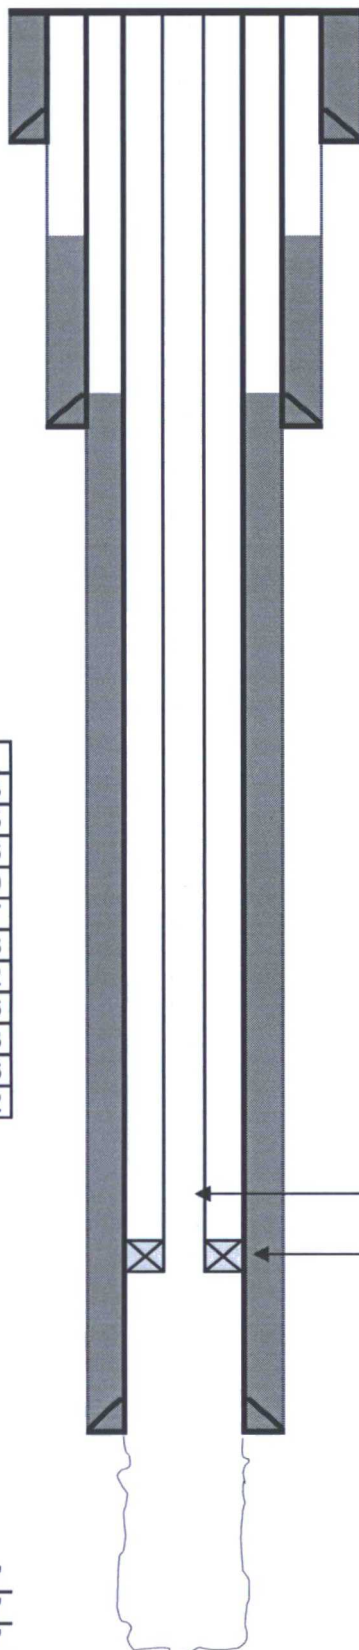

13-3/8" @ 297' (7 jts)

CMT: 300sx
 TOC: Surface (circ)
 HOLE: 17-1/2"

Spud Date: 8/24/1953
 TD Date: 9/22/1953
 Comp Date: 9/27/1953
 Elevation: 3836' DF
 3823' GL

8-5/8" 24# & 32# @ 3737' (89 jts)

CMT: 1500sx
 TOC: 602' (Temp Survey)
 HOLE: 11"

182 jts 2-3/8" tbg

5-1/2" Baker AD-1 inj pkr @ 5984' (8/25/93)

5-1/2" 15.5# @ 6030' (201 jts)

CMT: 550sx
 TOC: 3712' (Temp Survey)
 HOLE: 7-7/8"

4-3/4" OH f/6030-6260'

Formation Tops	
Rustler	2973
Salt	2035
Yates	3006
Seven Rivers	3270
Queen	3867
Grayburg	4308
San Andres	4582
LSAU OWC	5096
Glorieta	5933
Paddock	6016
LPU OWC	6282


Original TD: 6235'
 PBD: 6260'
 TD: 6260'

Well: Lovington Paddock Unit 48
Field: Lovington
Reservoir: Paddock

API: 30-025-03825
St.: New Mexico
Loc: 660' FNL and 2080' FEL

Sec: 1
Tws: 17S
Rng: 36E

13-3/8" @ 297'
TOC: Surface

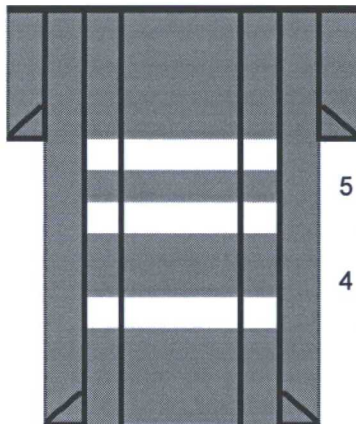

6 Perf @ 347' through prod & interm
csg strings and sqz 220 sx CL "C"
cmt f/ Surface t/ 347' (Shoe)

5 Perf @ 2,085' and sqz 35 sx CL "C" cmt
f/ 1,935' t/ 2,085'. WOC & tag (B.Salt)

4 Perf @ 3,320' and sqz 100 sx CL "C"
Gas Block cmt f/ 2,906' t/ 3,320', WOC & tag
(7 Rivers, Yates)

3 Attempt t/ perf @ 3,917' and sqz 55 sx CL "C" cmt
f/ 3,687' t/ 3,917', WOC & tag (Queen, Shoe)

2 Spot 45 sx CL "C" cmt f/ 4,632' t/ 4,208'
(San Andres, Grayburg)

1 Pull tbq and packer, set CIBP @ 5,950', spot MLF,
test csg, spot 25 sx CL "C" cmt f/ 5,950' t/ 5,703'.
WOC & tag only if csg does not test

8-5/8" @ 3737'
TOC: 602' (TS)

Formation Tops	
Rustler	2973
Salt	2035
Yates	3006
Seven Rivers	3270
Queen	3867
Grayburg	4308
San Andres	4582
LSAU OWC	5096
Glorieta	5933
Paddock	6016
LPU OWC	6282

5-1/2" 15.5# @ 6030'
TOC: 3,712' (TS)

4-3/4" OH f/6030-6260'

Original TD: 6235'
PBSD: 6260'
TD: 6260'

Spud Date: 8/24/1953
TD Date: 9/22/1953
Comp Date: 9/27/1953
Elevation: 3836' DF
3823' GL