

HOBBS
AUG 16 2018

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

Carlsbad Field Office
OCD Hobbs

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

MIN F
SWP F

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM128368
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator COG OPERATING LLC (229137)		7. If Unit or CA Agreement, Name and No.
3a. Address 600 West Illinois Ave Midland TX 79701		8. Lease Name and Well No. (322258) LITTLE BEAR FEDERAL COM 6H
3b. Phone No. (include area code) (432)683-7443		9. API Well No. 30-025-45102
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SWSW / 387 FSL / 660 FWL / LAT 32.523392 / LONG -103.554499 At proposed prod. zone NWNW / 200 FNL / 330 FWL / LAT 32.536293 / LONG -103.555596		10. Field and Pool, or Exploratory WILDCAT / WOLFCAMP (98247)
14. Distance in miles and direction from nearest town or post office* 14 miles		11. Sec., T. R. M. or Blk. and Survey or Area SEC 34 / T20S / R34E / NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 200 feet	16. No. of acres in lease 600	17. Spacing Unit dedicated to this well 160
18. Distance from proposed location* to nearest well, drilling, completed, 2654 feet applied for, on this lease, ft.	19. Proposed Depth 11576 feet / 16352 feet	20. BLM/BIA Bond No. on file FED: NMB000215
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3791 feet	22. Approximate date work will start* 08/01/2018	23. Estimated duration 30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature (Electronic Submission)	Name (Printed/Typed) Mayte Reyes / Ph: (575)748-6945	Date 04/20/2018
Title Regulatory Analyst		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Christopher Walls / Ph: (575)234-2234	Date 08/07/2018
Title Petroleum Engineer		
Office CARLSBAD		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

GCP Rec 08/16/18

APPROVED WITH CONDITIONS

Approval Date: 08/07/2018

*(Instructions on page 2)

K2
08/16/18

Dachle
8/16/18

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SWSW / 387 FSL / 660 FWL / TWSP: 20S / RANGE: 34E / SECTION: 34 / LAT: 32.523392 / LONG: -103.554499 (TVD: 0 feet, MD: 0 feet)
PPP: SWSW / 330 FSL / 330 FWL / TWSP: 20S / RANGE: 34E / SECTION: 34 / LAT: 32.523235 / LONG: -103.555569 (TVD: 11576 feet, MD: 11629 feet)
BHL: NWNW / 200 FNL / 330 FWL / TWSP: 20S / RANGE: 34E / SECTION: 34 / LAT: 32.536293 / LONG: -103.555596 (TVD: 11576 feet, MD: 16352 feet)

BLM Point of Contact

Name: Priscilla Perez

Title: Legal Instruments Examiner

Phone: 5752345934

Email: pperez@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

08/08/2018

APD ID: 10400029649

Submission Date: 04/20/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Well Type: OIL WELL

Well Work Type: Drill



[Show Final Text](#)

Section 1 - General

APD ID: 10400029649

Tie to previous NOS?

Submission Date: 04/20/2018

BLM Office: CARLSBAD

User: Mayte Reyes

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM128368

Lease Acres: 600

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: COG OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: COG OPERATING LLC

Operator Address: 600 West Illinois Ave

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)683-7443

Operator Internet Address: RODOM@CONCHO.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WILDCAT

Pool Name: WOLFCAMP

Is the proposed well in an area containing other mineral resources? USEABLE WATER,POTASH

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Describe other minerals:

Is the proposed well in a Helium production area? N **Use Existing Well Pad?** NO **New surface disturbance?**

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:
LITTLE BEAR FEDERAL COM
Number of Legs:

Number: 1H AND 6H

Well Class: HORIZONTAL

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 14 Miles

Distance to nearest well: 2654 FT

Distance to lease line: 200 FT

Reservoir well spacing assigned acres Measurement: 160 Acres

Well plat: COG_Little_Bear_6H_C_102_20180420090046.pdf

Well work start Date: 08/01/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	387	FSL	660	FWL	20S	34E	34	Aliquot SWS W	32.52339 2	- 103.5544 99	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	379 1	0	0
KOP Leg #1	387	FSL	660	FWL	20S	34E	34	Aliquot SWS W	32.52339 2	- 103.5544 99	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	379 1	0	0
PPP Leg #1	330	FSL	330	FWL	20S	34E	34	Aliquot SWS W	32.52323 5	- 103.5555 69	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	- 778 5	116 29	115 76



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/08/2018

APD ID: 10400029649

Submission Date: 04/20/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	QUATERNARY	3791	0	0		NONE	No
2	RUSTLER	2010	1781	1781		NONE	No
3	TOP SALT	1930	1861	1861	SALT	NONE	No
4	BASE OF SALT	281	3510	3510	ANHYDRITE	NONE	No
5	YATES	140	3651	3651	LIMESTONE	OTHER : Salt Water	No
6	CAPITAN REEF	-32	3823	3823		OTHER : Salt Water	No
7	CANYON	-1826	5617	5617		NATURAL GAS,OIL	No
8	BRUSHY CANYON	-3219	7010	7010		NATURAL GAS,OIL,POTASH	Yes
9	BONE SPRING LIME	-4960	8751	8751		NATURAL GAS,OIL	No
10	UPPER AVALON SHALE	-5281	9072	9072		NATURAL GAS,OIL	No
11	---	-5349	9140	9140		NATURAL GAS,OIL	No
12	BONE SPRING 1ST	-5990	9781	9781		NATURAL GAS,OIL	No
13	BONE SPRING 2ND	-6539	10330	10330	SANDSTONE	NATURAL GAS,OIL	No
14	BONE SPRING 3RD	-7326	11117	11117		NATURAL GAS,OIL	No
15	WOLFCAMP	-7931	11722	11722		NATURAL GAS,OIL	Yes

Section 2 - Blowout Prevention

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Pressure Rating (PSI): 3M

Rating Depth: 5645

Equipment: Annular. Accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_6H_3M_Choke_20180420090642.pdf

BOP Diagram Attachment:

COG_Little_Bear_6H_3M_BOP_20180420090648.pdf

COG_Little_Bear_6H_Flex_Hose_20180716125639.pdf

Pressure Rating (PSI): 5M

Rating Depth: 11576

Equipment: Annular, Blind Ram, Pipe Ram. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_6H_5M_Choke_20180420090748.pdf

BOP Diagram Attachment:

COG_Little_Bear_6H_5M_BOP_20180420090756.pdf

COG_Little_Bear_6H_Flex_Hose_20180716125619.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1810	0	1810	-6999	-7974	1810	J-55	54.5	STC	1.36	4.3	DRY	5.21	DRY	5.21
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5645	0	5645	-6999	-18749	5645	L-80	40	LTC	1.21	1.18	DRY	3.22	DRY	3.22
3	PRODUCTION	8.75	5.5	NEW	API	N	0	16352	0	16352	-6999	-24211	16352	P-110	17	LTC	1.24	2.19	DRY	2.26	DRY	2.26

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_6H_Casing_Prog_20180420090836.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_6H_Casing_Prog_20180420090842.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_6H_Casing_Prog_20180420090935.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1810	790	2	12.7	1580	50	Lead: 35:65:6 C Blend	As needed
SURFACE	Tail		0	1810	250	1.34	14.8	335	50	Class C	2% CaCl2
INTERMEDIATE	Lead		0	5645	330	1.98	12.7	653	50	Lead: 35:65:6 C Blend	As needed
INTERMEDIATE	Tail		0	5645	200	1.34	14.8	268	50	Tail: Class C	2% CaCl
PRODUCTION	Lead		0	1635 2	1370	2.5	11.9	3425	35	50:50:10 H Blend	As needed

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		0	1635 2	1450	1.24	14.4	1798	35	50:50:2 Class H Blend	As needed

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1810	5645	OTHER : Saturated Brine	9.8	10.2							Saturated Brine
0	1810	OTHER : FW Gel	8.6	8.8							FW Gel
5645	1635 2	OTHER : Cut Brine	8.6	10							Cut Brine

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

CNL,GR

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6020

Anticipated Surface Pressure: 3473.28

Anticipated Bottom Hole Temperature(F): 170

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

COG_Little_Bear_6H_H2S_SUP_20180420091141.pdf

COG_Little_Bear_6H_H2S_Schem_20180420091147.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

COG_Little_Bear_6H_AC_Report_20180420091207.pdf

COG_Little_Bear_6H_Direct_Plan_20180420091213.pdf


Other proposed operations facets description:

Other proposed operations facets attachment:


COG_Little_Bear_6H_GCP_20180420091228.pdf

COG_Little_Bear_6H_Drill_Prog_20180717141621.pdf


Other Variance attachment:

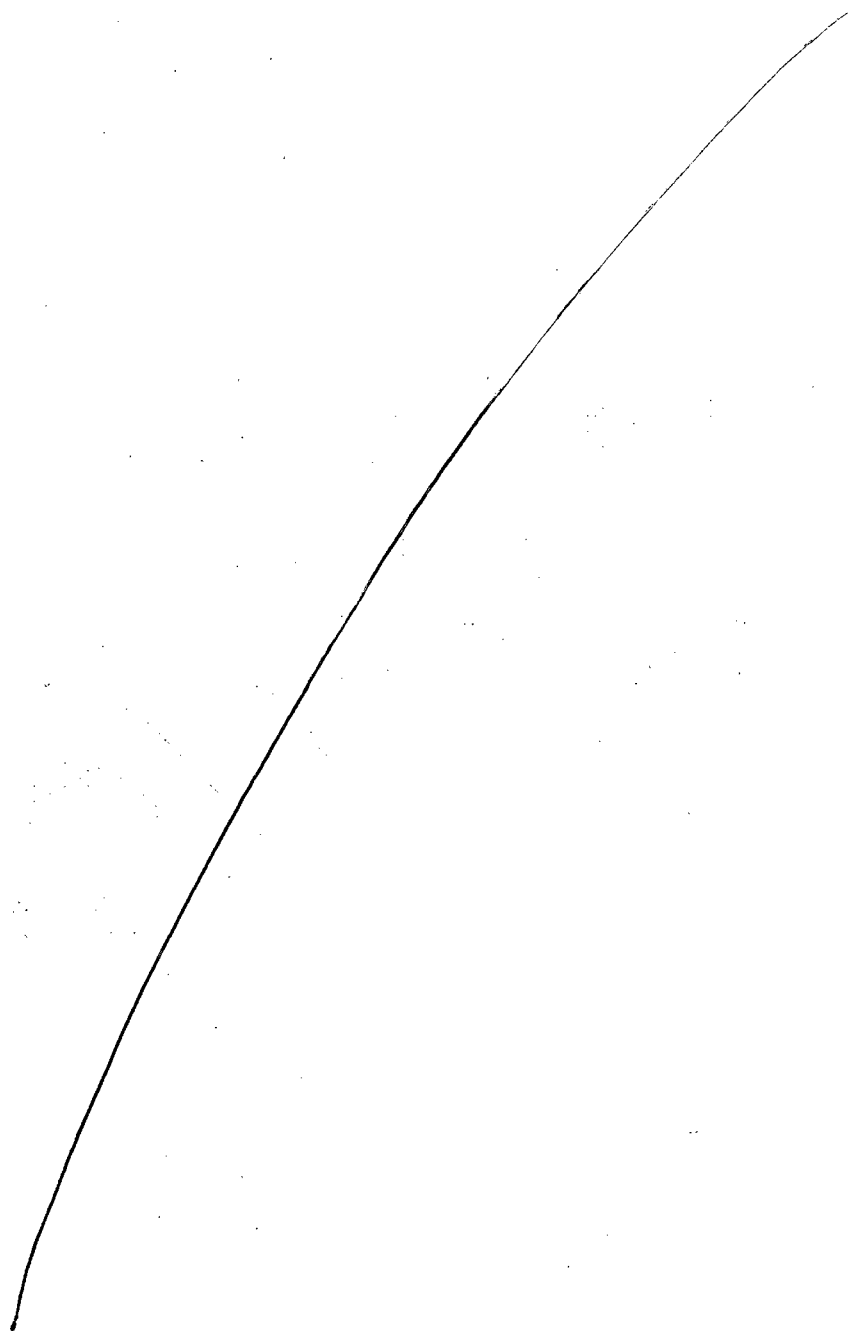


3M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

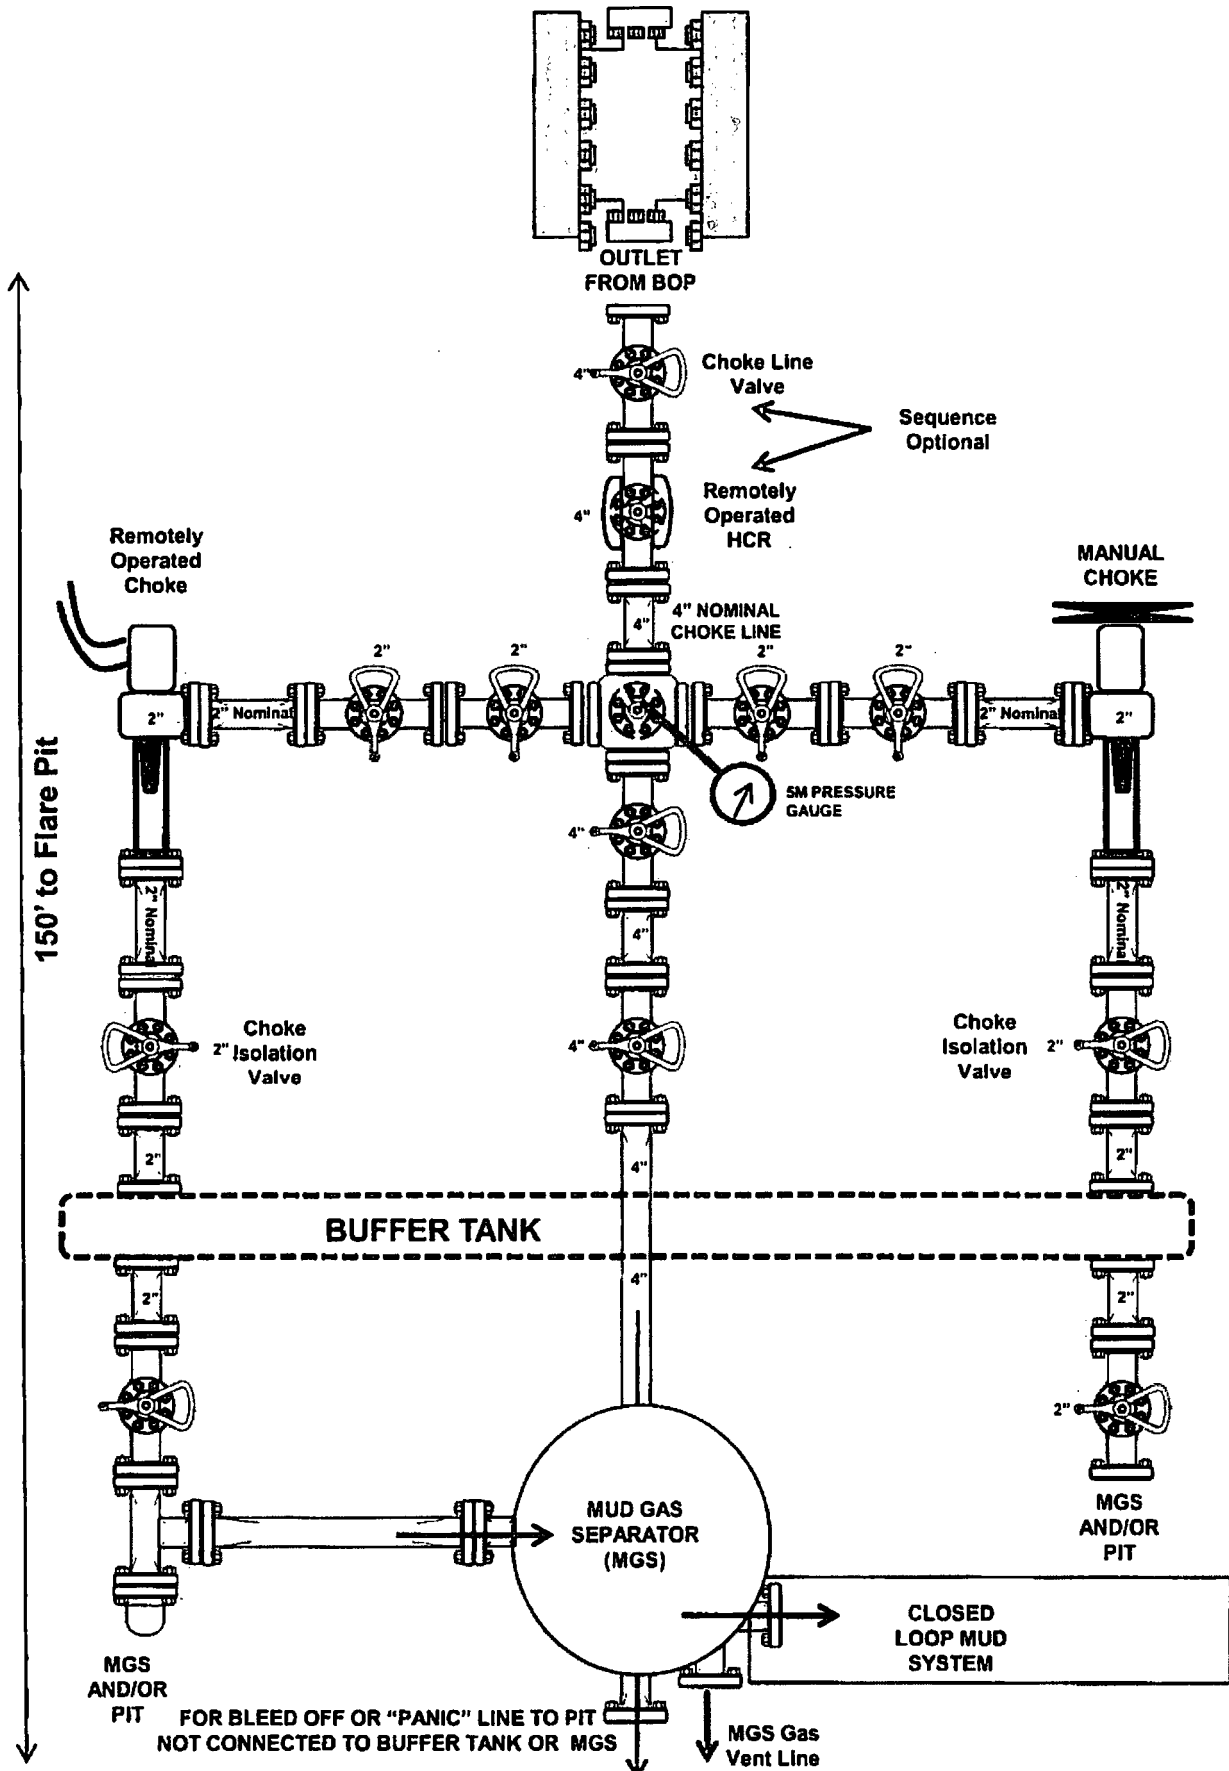

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

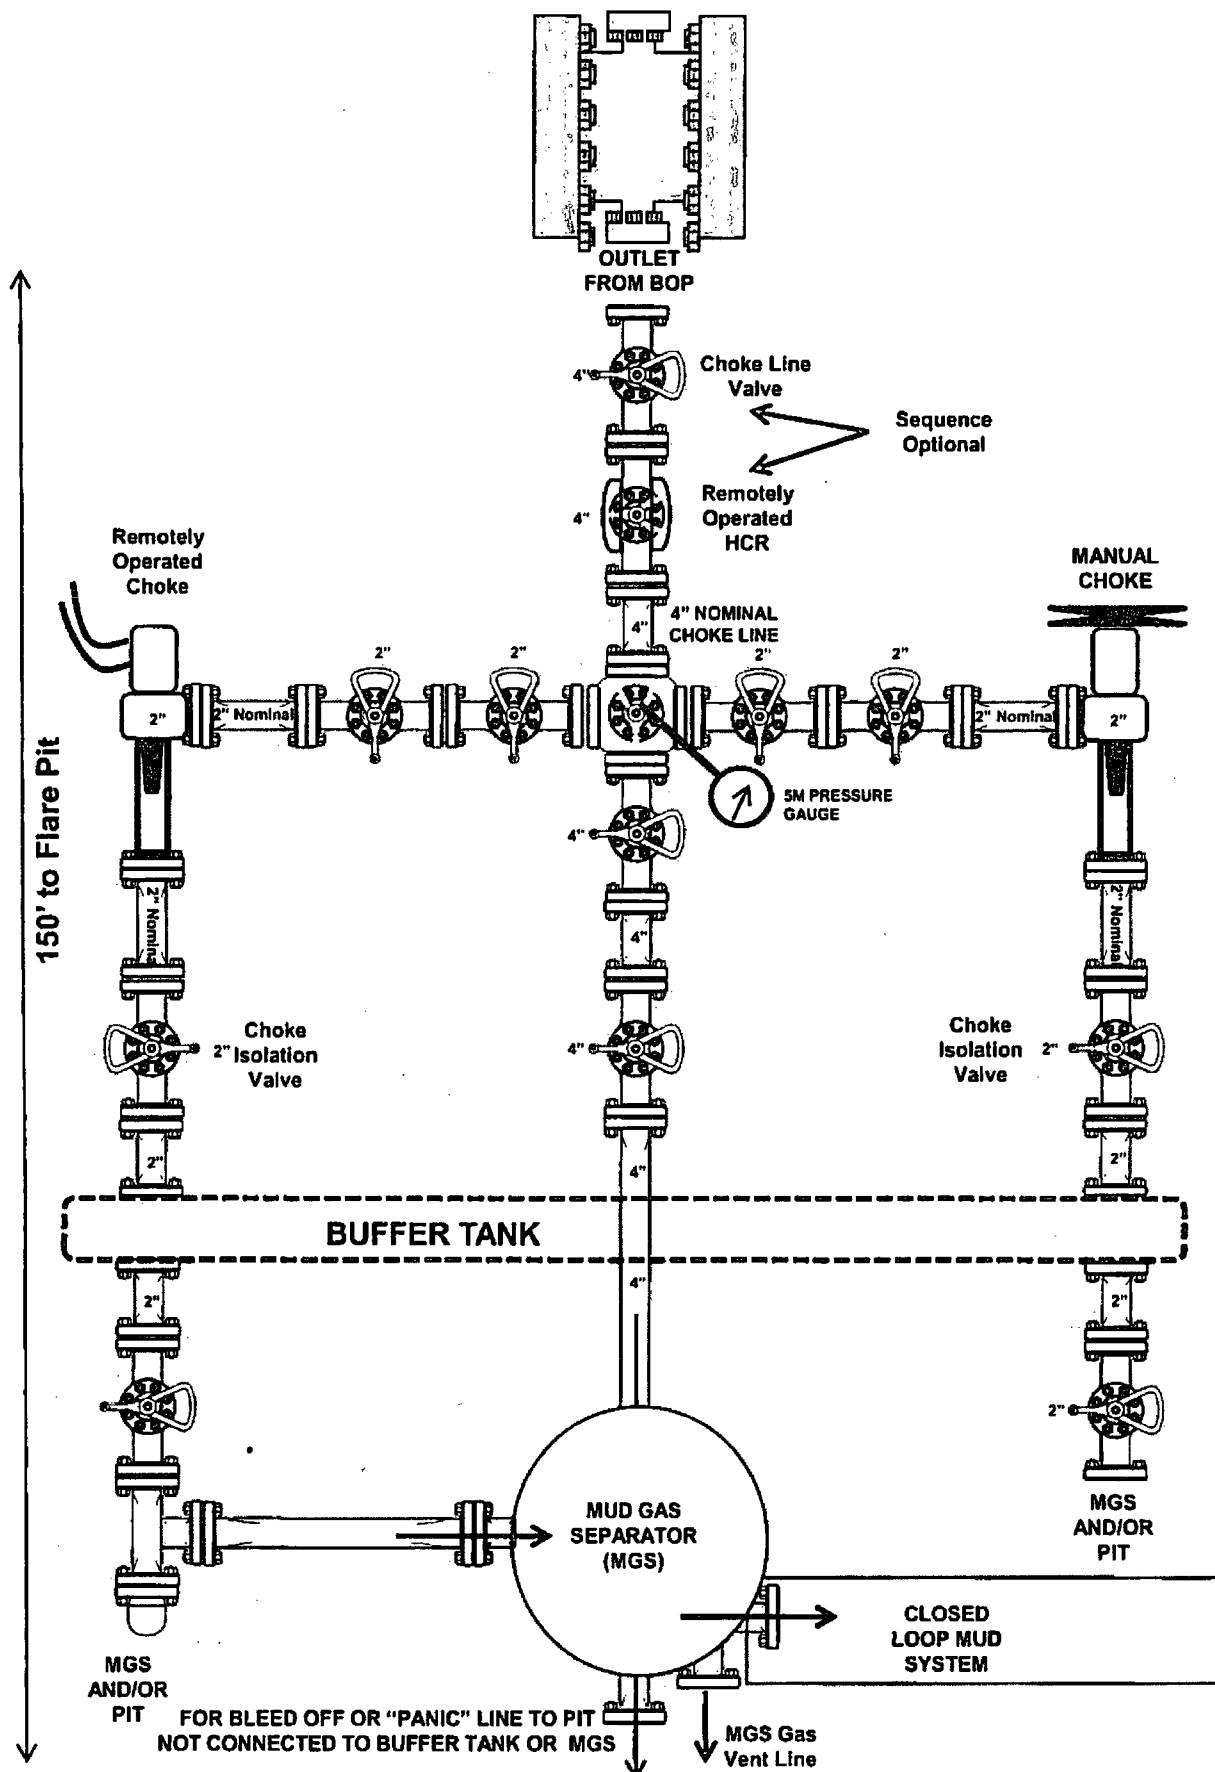

3,000 psi BOP Schematic

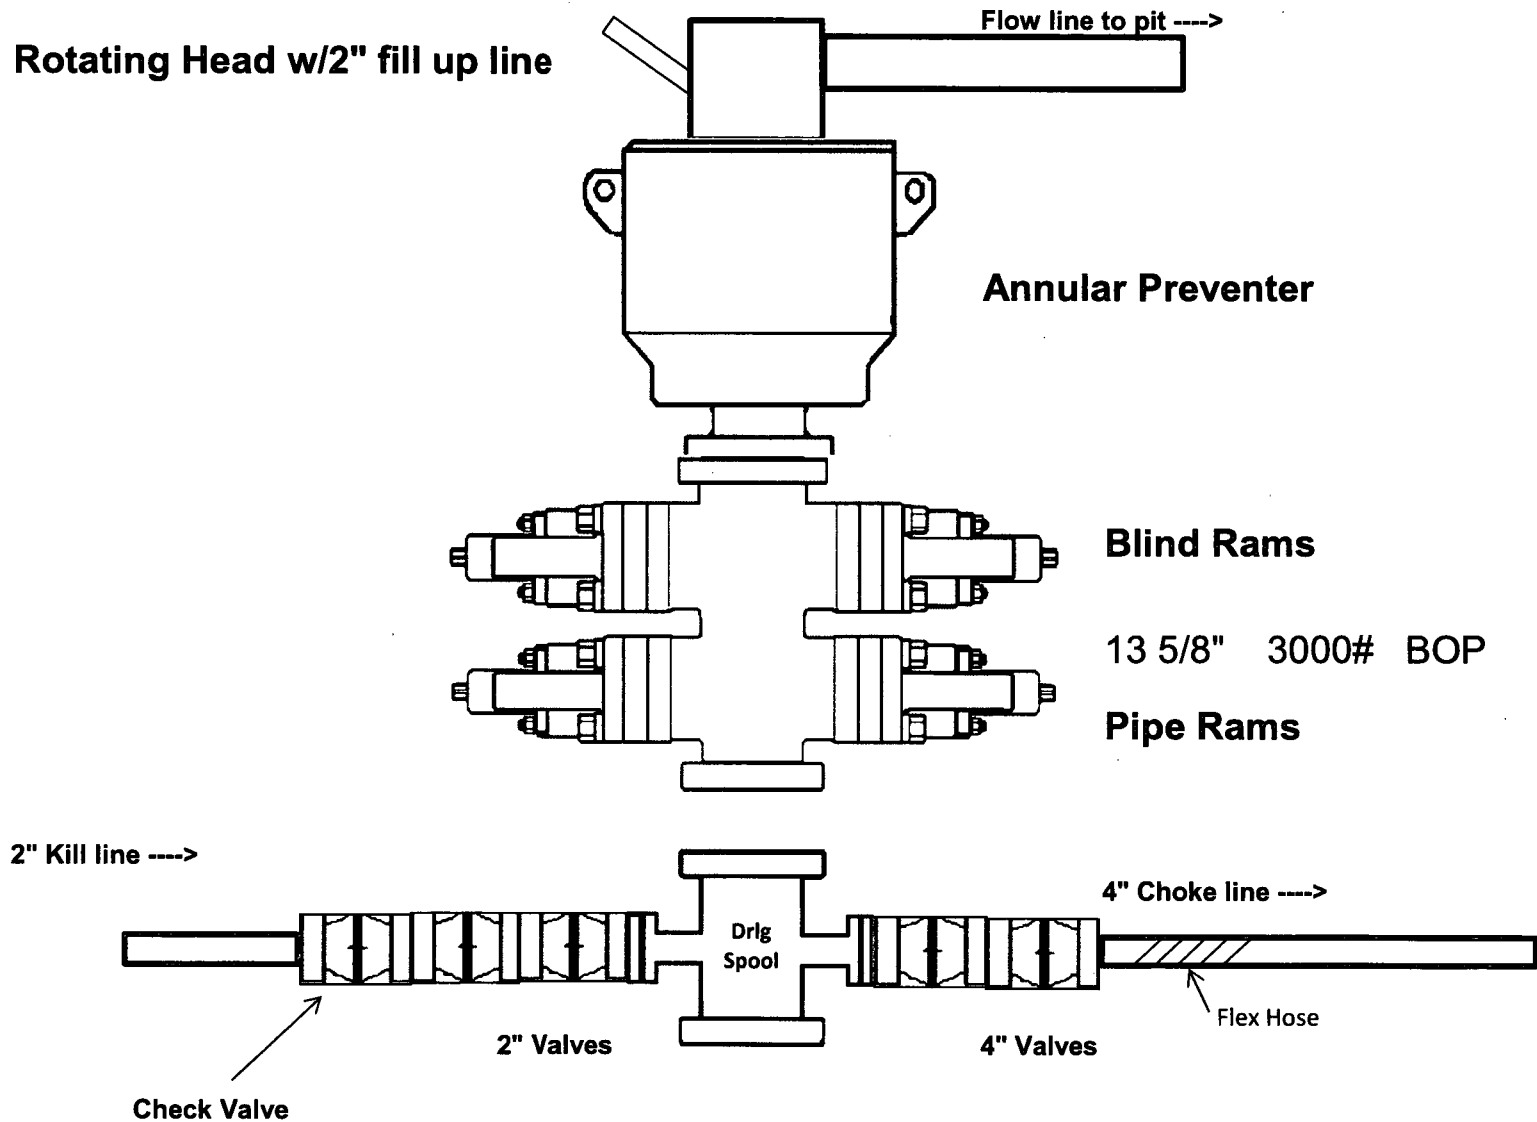

**INDEPENDENCE CONTRACT DRILLING
11601 N. GALAYDA STREET
HOUSTON, TX. 77086**

PURCHASE ORDER NO.: PO00116446

DATE: February 23, 2018

**COPPER STATE RUBBER/SPECIALTIES COMPANY
FILE: CSR / SPECO- 81069**

TAB 1

- I. CERTIFICATE OF REGISTRATION ISO 9001:2015
APIQR REGISTRATION NO.: 3042
- II. API CERTIFICATE OF ACCREDITATION FOR Q1
AND SPEC. 16C CERTIFICATE NO.:16C-0383

COPPER STATE RUBBER CHOKE / KILL HOSE, API SPEC. 16C MONOGRAMMED, FSL
3, TEMP RANGE B/P, 10,000 PSI WP, 15,000 PSI TEST, FIRE RESISTANT, WITH
BUTTWELD 4-1/16" 10K API FLANGE WITH S.S. LINED BX-155 RING GROOVE EACH
END. H2S SUITED.
1 EA. 3" ID X 75 FT.
S/N- 33851

TAB 2

- I. CSR CERTIFICATE OF COMPLIANCE
- II. COMPLETE ASSEMBLIES VISUAL INSPECTION/HYDROSTATIC
TEST REPORTS.
- III. PRESSURE GAUGE CALIBRATION CERTIFICATE, S/N.: 111291-2
- IV. CHART RECORDER CALIBRATION CERTIFICATE, S/N.: 07459

TAB 3

- I. METAL COMPONENT REPORTS
 - A. INSERTS:
 - 1. BRENDLELL 14C1, ENCORE METALS HT-418595
 - B. 4-1/16" 10K API MAWP 6A FLANGE
 - 1. MACHINE SPECIALTY & MFG. HT-V4760

TAB 4

- I. WELDING PROCEDURES AND QUALIFICATION RECORDS
 - A. COPPER STATE RUBBER WPS/PQR NOS.: 911171-1 AND 911171-2, REV. 5 FOR INSERTS TO TERMINATING CONNECTOR WELDMENTS

TAB 5

- I. NDE REPORTS FOR END FITTINGS TO INSERT WELDMENTS
 - A. STRESS RELIEVING
 - 1. **REPUBLIC HEAT TREAT**
CERT. ID NO.: 38120-1
P.O. NO.: 7494
 - B. RADIOGRAPHIC INSPECTION
 - 1. **RADIOGRAPHIC SPECIALISTS**
P.O. NO.: 7815

TAB 6

- I. FIELD TEST PROCEDURES FOR USED COPPER STATE RUBBER ROTARY AND VIBRATOR HOSE ASSEMBLIES
- II. COPPER STATE RUBBER 12 MONTH WARRANTY TERMS AND CONDITION



Certificate of Registration

**APIQR® REGISTRATION NUMBER
3042**

This certifies that the quality management system of

**COPPER STATE RUBBER, INC.
750 S. 59th Avenue
Phoenix, AZ**

*has been assessed by the American Petroleum Institute Quality Registrar (APIQR®) and
found it to be in conformance with the following standard:*

ISO 9001:2015

The scope of this registration and the approved quality management system applies to the
Design and Manufacture of Oilfield, Marine and Other Industrial Hoses

APIQR® approves the organization's justification for excluding:

No Exclusions Identified as Applicable

Effective Date: MARCH 28, 2017
Expiration Date: APRIL 21, 2019
Registered Since: APRIL 21, 2016

Vice President, API Global Industry Services

Accredited by Member of
the International
Accreditation Forum
Multilateral Recognition
Arrangement for Quality
Management Systems



This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of APIQR's Registration Program and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001 standard requirements may be obtained by consulting the registered organization. This certificate has been issued from APIQR offices located at 1220 L Street, N.W., Washington, D.C. 20005-4070, U.S.A., it is the property of APIQR, and must be returned upon request. To verify the authenticity of this certificate, go to www.api.org/compositelist.



2015 01 01 16



**American
Petroleum
Institute**



2015-313

Certificate of Authority to use the Official API Monogram

License Number: 16C-0383

ORIGINAL

The American Petroleum Institute hereby grants to

**COPPER STATE RUBBER, INC.
750 S. 59th Avenue
Phoenix, AZ**

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-16C** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **16C-0383**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Flexible Choke and Kill Lines at FSL 0, FSL 1, FSL 2, FSL 3

QMS Exclusions: No Exclusions Identified as Applicable

Effective Date: MARCH 28, 2017

Expiration Date: APRIL 21, 2019

To verify the authenticity of this license, go to www.api.org/compositelist.

Vice President, API Global Industry Services



14141 S. Wayside Drive
Houston, Texas 77048

Phone 713-644-1491
Fax 713-644-9830
www.copperstaterubber.com
sales@copperstaterubber.com

February 23, 2018

Independence Contracting Drilling
11601 N. Galayda St.
Houston, Texas 77086

Subject: Purchase Order No.: PO00116446
Date: February 23, 2018
Specialties Company File No.: CSR / SPECO-81069

Equipment: Copper State Rubber Choke/Kill Hose Assembly, 10KSI MAWP X 15KSI
T/P, API 16C FSL3, Fire Resistant Cover, Complete 4-1/16" 10KSI
MAWP Flange With BX155 SS Lined Ring Groove Each End. H2S
Suited.
1EA: 3" ID X 75Ft. S/N-33851

CERTIFICATE OF COMPLIANCE

This is to certify the above referenced equipment meets or exceeds the following requirements and were manufactured from same material specification and manufacturing methods as prototype assemblies for referenced specifications.

- I. COMPLETE HOSE ASSEMBLY
 - A. API Certificate of Accreditation for Spec: Q1 (Quality Programs) and Spec.: 16C
 - 1. Copper State Rubber, Inc. Certificate No.: 16C-0383
 - B. CSR Specification No.: 090-1915C
- II. PHYSICAL/CHEMICAL PROPERTIES OF METAL COMPONENTS
 - A. API Spec. 6A, latest edition
 - B. API Spec. 16A, latest edition
 - C. NACE Standard MR0175, latest edition
- III. WELDMENTS/NDE REQUIREMENTS
 - A. Section IX, ASME Boiler & Pressure Code, 1986 Ed., 1987 Add.
 - B. CSR/Specialties Company WPS/PQR Nos.: 911171-1, and 911171-2, Rev. 05 dated June 2005

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.

III. WELDMENTS/NDE REQUIREMENTS (continued)

- C. API Spec. 6A, latest edition
- D. API Spec. 16A, latest edition

Sincerely,

A handwritten signature in black ink, appearing to read "Joe Leeper", written in a cursive style.

Joe Leeper,
Technical Department



Visual Inspection / Hydrostatic Test Report

Manufacturer	Copper State Rubber Inc.
Hose Type	Choke and Kill
Pressure Rating	10,000 PSI MAWP X 15,000 PSI T/P
Spec Number	090-1915C-48
FSL Rating	FSL 3

Serial Number	33851
Size ID	3"
Length	75'
Date	December 9, 2017
Shop Order Number	31162

Connections Description: 4 1/16" 10K API FLANGE WITH SS INLAID BX-155 RING GROOVE EACH END

Traceability of Terminating Connectors

	Insert	Male	Nut	Female	Flanges	Hubs	Other
Connector 1	14C1				V4760		CSR-H1263
Connector 2	14C1				V4760		CSR-H1265

Comments _____

Calibrated Devices

Pressure Recorder	07459	Calibration Date	1/23/2017
Pressure Gauge	111291-2	Calibration Date	1/23/2017

*This report signifies that the product has been visually inspected for defects in the interior tube, recess, gasket, cover and branding and all have been found to be conforming.

Comments _____

Hydrostatic Testing Requirements

Length after test

60 Min @ 15,000 psi (-0/+500 psi)

75' OAL

Witness By: _____

Supervisor

Phil Spider

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Certificate of Calibration

Certificate # 1702331

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043

APPROVED
AS II
Quality Dept

Equipment Tested

Description : McDaniel Pressure Gauge	Calibration Date : January 23, 2017 Calibration Due : January 23, 2018
Model # : None Visible	Identification # : 111291-2
Range : 0-30000 PSIG	Serial # : None Visible
Accuracy : .50 % of Full Scale	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.100-2013

Measurement Data

% of Span	Gauge Reading	Actual Pressure	Reading Error	Maximum Allowable
20 %	6000	6054.9	54.9	150.0
40 %	12000	11995.2	-4.8	150.0
60 %	18000	17976.6	-23.4	150.0
80 %	24000	23965.8	-34.2	150.0
100 %	30000	29943.9	-56.1	150.0
Ambient Temperature : 19.5° C		Relative Humidity : Between 20 & 60%		
Comments : _____				
Uncertainty of Measurement is +/- (19 + 0.6R) psi				
Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor k=2				
The results obtained relate only to the item calibrated				
Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty.				
It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request				

Standards Used

Procedures : PTS Procedure Manual Section SCP-01 High Pressure Gauge	Standard : PTS 123 Sens o-tac Pressure System Cert# 1-132212 Due: 12 Jan 2018
---	--

Calibration Performed By K Canady

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCCL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.
Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.
This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

Page 1 of 1

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Certificate of Calibration

Certificate # 1702332

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043

APPROVE
 RS II
 Quality Of

Equipment Tested

Description : TechCal Pressure Gauge	Calibration Date : January 23, 2017 Calibration Due : January 23, 2018
Model # : Chart Recorder	Identification # : 07459
Range : 0-30000 PSIG	Serial # : 07459
Accuracy : .50 % of Full Scale	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.100-2013

Measurement Data

% of Span	Gauge Reading	Actual Pressure	Reading Error	Maximum Allowable
20 %	6000	5911.8	-88.2	150.0
40 %	12000	12075.7	75.7	150.0
60 %	18000	18085.6	85.6	150.0
80 %	24000	24090.2	90.2	150.0
100 %	30000	30045.1	45.1	150.0

Ambient Temperature : 19.5° C	Relative Humidity : Between 20 & 60%
-------------------------------	--------------------------------------

Comments :

Uncertainty of Measurement is +/- (19 + 0.6R) psi

Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor k=2

The results obtained relate only to the item calibrated

Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty.

It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request

Standards Used

Procedures : PTS Procedure Manual Section SCP-01 High Pressure Gauge	Standard : PTS 123 Sensotec Pressure System Cert # 1-132212 Due: 12 Jan 2018
---	---

Calibration Performed By K. Canady

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCSL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.
 Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.
 This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

Certificate of Calibration

Certificate # 1702332

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043



Equipment Tested

Description : TechCal Temperature Gauge	Calibration Date : January 23, 2017 Due Date : January 23, 2018
Model # : Chart Recorder	Identification # : 07459
Range : 0-150° F	Serial # : 07459
Accuracy : 1.5 F	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.200 - 2008 (R2013)

Measurement Data in degrees F

Actual	Unit Under Test
50.06	50
100.11	100
150.09	150

Ambient Temperature : **19.5°C**

Relative Humidity : **Between 20 & 60%**

Comments : **AS RETURNED - Gauge Adjusted**

Uncertainty of Measurement is **+/- .12 Deg C**

Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor k=2

The results obtained relate only to the item calibrated

Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty. It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request

Standards Used

Procedures :
PTS Procedure Manual Section : **SCP 25 - Thermometer - Analog, Digital, Glass**

Standard : **PTS 111 ThermoWorks Reference Thermometer**
Certificate # **222834** Due: **02 Sep 2017**
PTS 118 Techna Temperature Well
Certificate # **161536** Due: **01 Jun 2017**

Calibration Performed By **K Canady**

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCSL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.

Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.

This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

1421

encoremetals**CERTIFICATE OF TEST**

Page 01 of 02

Certification Date
14-JUL-2014**CUSTOMER ORDER NUMBER**

15916

ENCORE METALS US

789 NORTH 400 WEST

NORTH SALT LAKE UT 84054

Invoice Number

S160494

CUSTOMER PART NUMBER

SERIAL#G87

SOLD TO:	BRENDELL MANUFACTURING INC	SHIP TO:	BRENDELL MANUFACTURING INC.
	580 NORTH 400 WEST		580 NORTH 400 WEST
	NORTH SALT LAKE UT 84054		NORTH SALT LAKE UT 84054

Description: E4130 HR NORM Q&T BAR API 6A PSL3 NACE MR0175
 6-1/2 RD X 20' R/L Line Total: 19.5 FT
 HEAT: 418595 ITEM: 505824

Specifications:

NACE MR-01-75

AMS H 6875 A

ASTM A370 11

API 6A PSL 3

ASTM A29 12

ASTM A304 04

EN 10204 3.1

ASTM A322 07

CHEMICAL ANALYSIS

C	MN	SI	P	S	CR	NI	MO
0.313	0.56	0.25	0.014	0.003	1.0600	0.17	0.23
AL	CU	SN	TI	V	NB	AS	CA
0.025	0.28	0.014	0.0027	0.027	0.003	0.006	0.0015
SB	CO	PB					
0.001	0.011	0.002					

RCPT: R120906

COUNTRY OF ORIGIN : ITALY

MECHANICAL PROPERTIES

	YLD STR	ULT TEN	%ELONG	%RED	HARDNESS
DESCRIPTION	PSI	PSI	IN 02 IN	IN AREA	BHN
TEST PC/QTC	85862.0	104572.0	22.0	60.0	229
	YLD STR	ULT TEN	%ELONG	%RED	HARDNESS
DESCRIPTION				IN AREA	BHN
SURFACE					229

The above data were transcribed from the manufacturer's Certificate of Test after verification for completeness and specification requirements of the information on the certificate. All test results remain on file subject to examination.

We hereby certify that the material covered by this report will meet the applicable requirements described herein, including any specification forming a part of the description.

The willful recording of false, fictitious, or fraudulent statements in connection with test results may be punishable as a felony under federal statutes.

Material did not come in contact with mercury while in our possession.

DIANA JOHNSON

INSERT MATERIAL
 INDEPENDENCE CONTRACT DRILLING
 P.O. NO.: PO00116446
 DATE: FEBRUARY 23, 2018
 FILE NO.: CSR / SPECO-81069

encoremals

CERTIFICATE OF TEST

Page 02 of 02

Certification Date
14-JUL-2014

CUSTOMER ORDER NUMBER

15916

ENCORE METALS US

789 NORTH 400 WEST

NORTH SALT LAKE UT 84054

Invoice Number

S160494

CUSTOMER PART NUMBER

SERIAL#G87

SOLD TO:	BRENDELL MANUFACTURING INC	SHIP TO:	BRENDELL MANUFACTURING INC.
	580 NORTH 400 WEST		580 NORTH 400 WEST
	NORTH SALT LAKE UT 84054		NORTH SALT LAKE UT 84054

Description: E4130 HR NORM Q&T BAR API 6A PSL3 NACE MR0175
6-1/2 RD X 20' R/L Line Total: 19.5 FT
HEAT: 418595 ITEM: 505824

GRAIN SIZE :7 -

IMPACT TEST		UOM ft-lbs			%	LAT	DESCRIPTION	
TYPE	TEMP	ORNT	SMPL#1	#2	#3	AVG		SHEAR EXPN
CHARPY	-75 F	LONG	33.0	36.0	36.0	35.0		10mm x 10mm

MATERIAL IS FREE FROM MERCURY CONTAMINATION
NO WELD REPAIR PERFORMED ON MATERIAL
THERMAL TREATMENT: OK
NORMALIZED 1652 DEG F X 353'
QUENCHED 1616 DEG F WATER X 353'
TEMPERED 1300 DEG F AIR X 390'
WATER TEMP BEFORE 86 DEG F AFTER 86 DEG F


The above data were transcribed from the manufacturer's Certificate of Test after verification for completeness and specification requirements of the information on the certificate. All test results remain on file subject to examination.

We hereby certify that the material covered by this report will meet the applicable requirements described herein, including any specification forming a part of the description.

The willful recording of false, fictitious, or fraudulent statements in connection with test results may be punishable as a felony under federal statutes.

Material did not come in contact with mercury while in our possession.

DIANA JOHNSON



TECHNICAL MANAGER



MACHINE SPECIALTY & MFG., INC.
215 ROUSSEAU ROAD
YOUNGSVILLE, LA 70592
Phone: 337-837-0020
Fax: 337-837-0082

Material Test Report

Page : 1 of 1

SOLD TO: SPECIALTIES CO./COPPER STATE
RUBBER INC.
14141 S WAYSIDE DRIVE
HOUSTON, TX 77048

SHIP TO: SPECIALTIES CO./COPPER STATE
RUBBER INC.
14141 S WAYSIDE DRIVE
HOUSTON, TX 77048

DATE		SALES ORDER #	CUST P.O.#	TAG NUMBER	ITEM TAG		
11/17/2016		0260385	110816WL				
ITEM #	QTY	ITEM DESCRIPTION			HEAT CODE	HEAT NUMBER	STARTING MATERIAL
2	8	4 1/16 10M RTJ WN 3 ID 4.5 OD TAPER BORE PSL-3 316SS INLAY SO# 13056-01 THRU -08			V4760	G1207	API 6A 75K 4130

CHEMICAL ANALYSIS

C	Si	Mn	S	P	Cr	Cu	Al	Ni	Mo	V
.32	.22	.51	.011	.013	.98			.065	.17	.008

PHYSICAL PROPERTIES

Yield PSI	Tensile PSI	Elongation	REDUCTION OF AREA %	Hardness Brinell
87898	104257	27.65	70.24	201-233

IMPACT TESTING

TYPE	TEMP	SMPL# 1	# 2	# 3	AVG	%SHEAR	LAT EXP
CHPY-75	- 75F	54 L	58 L	52 L	55	32-31-34	.032-.031-.030

SUPPLEMENTAL INFORMATION

NORMALIZE@1680F FOR 180MIN AUSTENITIZE@1600F FOR 180MIN TEMPER@1260F FOR 240MIN QTC: SACRIFICIAL PIECE CHARPY: 10 X 10 X.55 MELT PRACTICE: EAF-LRF-VD-CCM W/ EMS

WE HEREBY CERTIFY THAT ALL TEST RESULTS CONTAINED HEREIN ARE CORRECT AND TRUE AS CONTAINED IN THE RECORDS OF THE COMPANY. ALL TEMPERATURES ARE IN FAHRENHEIT AND IMPACT TESTING IN FT LBS MANUFACTURED IN USA. EN10204 3.1

Q.A. DEPARTMENT

FLANGE MATERIAL
INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069



Specialties Company
copper state rubber, inc.

6401 McGrew St.
Houston, Texas 77087
713-644-1491
713-644-9830 Fax
csrhouston@msn.com

WELDING PROCEDURE SPECIFICATION, WPS NO: 911171-1
SECTION IX, ASME BOILER 7 PRESSURE VESSEL CODE, 1989 EDITION, 1990 ADDENDA

COMPANY: COPPER STATE RUBBER, INC. SUBSIDIARY OF SPECIALTIES CO.

BY: KEN FORDYCE DATE: 10/07/91 REVISED BY: ROGER PEACE
TECHNICAL MANAGER
COPPER STATE RUBBER

REVISION NO: 5 DATE: 5-31-2005

SUPPORTING PQR(s): 911171-2

REVIEWED REV. 5
Michael D. Miller
24 JUNE 2005

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.



SOUTHWESTERN LABORATORIES

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692-9151

REVIEWED
as indicated in
AES Letter dated:

DEC 20 1995

WABS
HOUSTON

Welding Procedure Specification, WPS No. 911171-1 Section IX, ASME Boiler & Pressure Vessel Code, 1989 Edition, 1990 Addenda

Company: Copper State Rubber, Inc. subsidiary of Specialties Co.

By: Ken Fordyce Date: 10/07/91 Revised By: ROGER PEACE Date: 7-16-93

Supporting PQR(s): 911171-2

REVISION 4
TECHNICAL MANAGER
COPPER STATE RUBBER

WELDING PROCESS(es)

Auto: Semi-auto: GMAW-S Machine: Manual:

JOINTS (QW-402)

Joint Design: The joint may be changed from that shown to any other type (e.g. double-V, single, double-U, single, double-J, etc.) which is consistent with design and application requirements, including those of the construction code; changes in the design (root gap, use of retainers, etc.) beyond that permitted in this WPS must be specified in a new or revised WPS.

Backing: Use backing or backgouging w/SMAW.

Backing Type: weld metal or base metal

Retainers: metallic/nonmetallic may be used

BASE METALS (QW-403)

Specification: AISI 4130 API 6A 75K material designation, 207-235 BHN

Groove Thickness Range: 3/16"-8" f/nonimpacts Fillet Thickness Range: all

Pipe Groove Diameter Range: all Pipe Fillet Diameter Range: all

Other Base Metal Thickness Limitations:

- (1) 1.65" maximum for any single weld pass thicker than 1/2."
- (2) 5/8" minimum to 2.5" maximum for impacts

FILLER METALS (QW-404)

AWS Class No.: Only A-No. 11 low hydrogen electrodes (E10018-D2, E10015-D2, & E10016-D2) are qualified for impacts; only ER80S-D2 is qualified for impacts.

Specification: 5.28, GMAW; 5.5, SMAW F-No.: 6, GMAW; 4, SMAW A-No.: 11

Size: 0.035"-0.045" diameter for GMAW-S; 1/8"-1/4" diameter for SMAW

Groove Weld Size/Deposit Range: 0.14" max. for GMAW-S; 2.36" max. for SMAW impacts; 7.86" max. for SMAW nonimpacts

Fillet Size Range: any

Other: The maximum SMAW bead size qualified for impacts is 3/16" thick x 1/2" wide x 6" long. See foot note to Table 1. Solid bare wire must be used for GMAW. Supplementary filler metal or powder not permitted.

APPROVED

This approval covers only
ABS requirements and does not
include items not required by
ABS. See comments in ABS

Letter dated:

01 FEB 1992

1/16 in + 0 - 1/64 in
3/32 in ± 1/64 in

HOUSTON
GLENN D. GLENN
DIRECTOR OF ENGINEERING
ABS LABORATORY
Single-V Groove
by GLENN

RANGE CUM
TO 8" PER FOR
LOW IMPACTS

TO 2.5" FOR
IMPACTS

MDT-30°C

ACCEPTABLE
FOR H₂S
SERVICE

NACE MR0175

ASME IX
DAW (NON)
DRILL



For compliance with
UK DEN OFFSHORE
INSTALLATIONS
(CONSTRUCTION AND SURVEY)
REGULATIONS, 1974"

For compliance with the
applicable parts of the
Norwegian Petroleum
Directorate's "ACTS,
REGULATIONS AND
PROVISIONS FOR THE
PETROLEUM INDUSTRY"

POSITIONS (QW-405)

Groove: flat for impactsFillet: flat for impactsVertical Progression: up or down

WELD & BASE METAL TEMPERATURES (QW-406)

Preheat: 200°F for T to 1"; 300°F over 1"Interpass: 600°F for impactsMaintenance: none

POSTWELD HEAT TREATMENT (QW-407)

Temperature Range: 1200°F-1225°F Time Range: 1 hour per inch of section
or 20°F-30°F below base metal thickness

tempering temperature.

SHIELDING, BACKING, TRAILING GAS (QW-408)

GMAW-S	Gas Type/Mix	Percent Mixture	Flow Rate (cfh)
Shielding:	Argon/CO2*	75% Ar/25%CO2*	30 Minimum
Backing:	none*	none	none
Trailing:	none	none	none

ELECTRICAL CHARACTERISTICS (QW-409)

Current & Polarity: DC reverse (DCEP) Heat Input: See Table 1 note.Voltage: See Table 1. Transfer Mode: short-circuiting for GMAW-S

TECHNIQUE (QW-410)

String or Weave: string only for impacts*Cleaning: wire brush, chip, grind, or other suitable means to remove slag, rust, scale, grease, or other harmful materials from the weld fusion zoneMethod of Back Gouging: mechanical or thermal cutting (w/specified preheat)Tube to Work Distance: 1/4"-1/2" Passes per Side: multiple only for impactsElectrodes: single only for impacts Peening: may be used on intermediateGMAW Gas Cup Size: Nos. 3-8 passes to reduce shrinkage stresses

TABLE 1

ESSENTIAL & NONESSENTIAL PROCEDURE VARIABLES

Pass No.	Process	Filler Metal		Current			Travel	
		Class	Dia.	Type	Amps.	Volts	Direction	Speed
1	GMAW-S	ER80S-D2	0.035	DCEP	60-130	15-20	Flat	7.0 ipm
Any	SMAW	E10018-D2	1/8	DCEP	110-140	18-25	Flat	7.0 ipm

*NOTE: The maximum bead size that may be deposited for impacts in any pass is 3/16" thick x 1/2" wide x 6" long with 1/8" diameter electrodes.

This WPS was documented to code requirements by Kelly Sordy of S&L as Report No. 911171-1. It gives the values and/or limits of essential, supplementary essential, and nonessential welding variables permitted by Section IX of the ASME Code as a result of successful procedure qualification. The essential and supplementary essential variables may be changed within the limitations of ASME Section IX, QW-250 without requalification. Changes outside those limits require requalification of the altered procedure.

PP Johnston
Reviewed By:

Date: 10/07/91File No.: 12-8075-00



SOUTHWESTERN LABORATORIES

18-00

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692-5151

Procedure Qualification Record, POR No. 911171-2 Section IX, ASME Boiler & Pressure Vessel Code, 1989 Edition, 1990 Addenda

Date: 10/07/91 WPS No. (s): 911171-1

WELDING PROCESS(es)

Auto: _____ Semi-auto: GMAW-S Machine: _____ Manual: SMAW

JOINTS (QW-402)

Single-V-Groove Weld with No Backing

Root Gap = 1/8"

Root Face = 1/16"

Groove Angle = 70° 1st 3/4"

Groove Angle = 33° 2nd 3/4"

Joint Design

BASE METALS (QW-403)

Material Spec.: AISI 4130

Type & Grade: API 75k designation

P-No.: _____ to P-No.: _____

Thickness of Test Coupon: 1-1/2"

Diameter of Test Coupon: 10" OD

Other: normalized, quenched, tempered
to 228 BHN (Heat No. A2769)

FILLER METALS (QW-404)

Spec Class. F-No. A-No. Dia.

GMAW: 5.28 ER80S-D2 6 11 0.035"

SMAW: 5.5 E10018-D2 4 11 1/8"

POSITION (QW-405)

Position of Joint: 1G Rolled

Progression of Weld See Table 1.

PREHEAT TEMPERATURE (QW-406)

Preheat: 300°F minimum

Interpass: 500°F maximum

Maintenance: _____

POSTWELD HEAT TREATMENT (QW-407)

Temperature: 1230°F

Time: 2-1/2 hours

Other: _____

GAS (QW-408)

Shielding Gas: Argon & CO2

Mixture: 75% Ar, 25% CO2

Shielding Flow Rate: 30 cfm

Backing Flow Rate: _____

ELECTRICAL (QW-409)

Voltage: See Table 1.

Current: See Table 1.

Mode of Transfer: Short Circuiting

Heat Input: See Table 1 note.

TECHNIQUE (QW-410)

String or Weave: String & Weave

Passes per Side: multiple

Deposit Thickness 1/8" GMAW; 1-3/8" SMAW

Machine Oscillation: NA

Number of Electrodes: NA

TABLE 1

ESSENTIAL & NONESSENTIAL PROCEDURE VARIABLES

Pass No.	Process	Filler Metal		Current			Travel	
		Class	Dia.	Type	Amps.	Volts	Direction	Speed
1	GMAW-S	ER80S-D2	0.035	DCEP	60-130	15-20	Flat	7.0 ipm
2-24	SMAW	E10018-D2	1/8	DCEP	110-140	18-25	Flat	7.0 ipm

NOTE: The maximum volume of weld metal deposited during any single pass was a 3/16" thick x 1/2" wide bead in a 6" length using a 1/8" diameter E10018-D2 electrode.

SOUTHWESTERN LABORATORIES

PQR No.: 911171-2

Page 2 of 3

TENSILE TEST Nos. 57022 & 57103 (QW-150)

Specimen No.	Width or Dia. (in.)	Thickness (in.)	Area (in. ²)	Ultimate Load (lb.)	Stress (psi.)	Ultimate Failure Location
1	0.748	1.296	0.9694	98,710	101,800	Weld Metal
2	0.748	1.378	1.0307	105,700	102,500	Weld Metal

GUIDED BEND TEST Nos. 57022 & 57103 (QW-160)

Type & Figure No.	Result
Four Side Bends per QW-462.2	Satisfactory

TOUGHNESS TEST No. 57103 (QW-170)

Specimen No.	Notch Location	Notch Type	Test Temp (°C)	Impact Values	Lateral Exp Mils	Exp Shear%	Section Size at Notch (mm)
1	Weld	Vee	-15	88	60	75	8 10
2	Weld	Vee	-15	29	39	30	8 10
3	Weld	Vee	-15	32	42	30	8 10
Fusion Line (FL)							
1	FL	Vee	-15	52	37	60	8 10
2	FL	Vee	-15	47	36	60	8 10
3	FL	Vee	-15	56	43	60	8 10
1	FL+2mm	Vee	-15	104	70	75	8 10
2	FL+2mm	Vee	-15	118	74	75	8 10
3	FL+2mm	Vee	-15	102	68	75	8 10
1	FL+5mm	Vee	-15	108	70	75	8 10
2	FL+5mm	Vee	-15	106	68	75	8 10
3	FL+5mm	Vee	-15	105	66	75	8 10

Rockwell Hardness Survey (2mm below Face of Weld)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected				Unaffected		Heat Affected	
No.	HRB	No.	HRB	No.	HRB	No.	HRB	No.	HRB
1.	97.2	2.	98.7	3.	96.6	6.	98.3	7.	96.7
				4.	96.9				
				5.	96.6				

Rockwell Hardness Survey (at midwall)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected		No.	HRB	Unaffected		Heat Affected	
No.	HRB	No.	HRB			No.	HRB	No.	HRB
8.	93.6	9.	93.5	10.	92.9	12.	95.8	13.	98.3
				11.	97.7				

Rockwell Hardness Survey (2mm below root of weld)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected		No.	HRB	Unaffected		Heat Affected	
No.	HRB	No.	HRB			No.	HRB	No.	HRB
14.	95.6	15.	99.9	16.	96.4	17.	97.9	18.	99.9

This PQR was documented to code requirements by Kay Jorde of SwL as Report No. 911171-2 from the welding variables recorded by Copper State Rubber, Inc. during the welding of the test coupons and the results of tensile, guided-bend, hardness, and charpy impact tests performed by SwL.

LPH

Reviewed By:

Date: 10/07/91

Client No.: 12-8075-00

Welder: Randy Wiseman ID/Stamp No.: 234-48-95

We, the undersigned, certify that the statements in this record are correct and that the test welds were prepared and tested in accordance with code requirements.

Signed: Copper State Rubber, Inc.

Date: OCT 8, 1991

By: ROGER D. PEACE

ROGER D. PEACE

SwL**SOUTHWESTERN LABORATORIES****SWL**

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692 9251

Welder Qualification Test Record, WQTR No. 930635-1

Section IX, ASME Boiler & Pressure Vessel Code, 1992 Edition

Using WPS No. 911171-1 Rev. 1, Welder Jay B. Williams, ID No. 453-06-6487, qualified for the following ranges.

Test Variables	Test Values	Qualification Range
PROCESS:	GMAW-S	GMAW-S Only
BACKING:	Without	With or Without
MATERIAL SPECIFICATION:	Quenched & Tempered AISI 4130 to API 6A TP 7SK	P-No. 1 through P-No. 11, P-No. 4X and unassigned metals of similar chemical composition
DEPOSIT THICKNESS:		
GROOVE	1/8"	9/64" Maximum
FILLET	Not Applicable	Any
DIAMETER:		
GROOVE	4-1/2" OD	2-7/8" OD & Over
FILLET	Not Applicable	Any
FILLER METAL:		
SPECIFICATION	SFA-5.28	
CLASSIFICATION	AWS ER80S-D2	
F-NO.	6	6, or any bare wire conforming to an analysis listed in QW-442
POSITION:	1G	Flat Only
VERTICAL WELDING DIRECTION:	Not Applicable	—
BACKING GAS:	Without	With or Without

Examination & Test Results

GUIDED-BEND TEST NO. 60596 PER QW-160:	RESULT:
Two Side Bends per QW-462.2	Satisfactory

NOTE:	The Guided-bend tests were witnessed by Glen R. Lauritsen, Principal surveyor, ABS AMERICA, a division of The AMERICAN BUREAU of SHIPPING.
-------	--

This WQTR was documented to Code requirements by Kay Jordy of SwL as Report No. 930635-1 from the welding variables recorded by Copper State Rubber, Inc., Specialties Co. during the welding of the test coupon and the results of guided-bend tests performed by SwL.


REVIEWED BY

DATE:	May 12, 1993	FILE NO.:	12-8075-00
-------	--------------	-----------	------------



SOUTHWESTERN LABORATORIES

SWL

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692 9251

Welder Qualification Test Record, WQTR No. 930635-2

Section IX, ASME Boiler & Pressure Vessel Code, 1992 Edition

Using WPS No. 911171-1 Rev. 1, Welder Jay B. Williams, ID No. 453-06-6487, qualified for the following ranges.

Test Variables	Test Values	Qualification Range
PROCESS:	SMAW	SMAW Only
BACKING:	With	With Only
MATERIAL SPECIFICATION:	Quenched & Tempered AISI 4130 to API 6A TP 75K	P-No. 1 through P-No. 11, P-No. 4X and unassigned metals of similar chemical composition
DEPOSIT THICKNESS:		
GROOVE	5/8"	1-1/4" Maximum
FILLET	Not Applicable	Any
DIAMETER:		
GROOVE	4-1/2" OD	2-7/8" OD & Over
FILLET	Not Applicable	Any
FILLER METAL:		
SPECIFICATION	SFA-5.5	
CLASSIFICATION	AWS E10018-D2	
F-NO.	4	1, 2, 3, & 4
POSITION:	1G	Flat Only
VERTICAL WELDING DIRECTION:	Not Applicable	-
BACKING GAS:	Not Applicable	-

Examination & Test Results

GUIDED-BEND TEST NO. 60596 PER QW-160:	RESULT:
Two Side Bends per QW-462.2	Satisfactory

NOTE:	The Guided-bend tests were witnessed by Glen R. Lauritsen, Principal surveyor, ABS AMERICA, a division of The AMERICAN BUREAU of SHIPPING.
-------	--

This WQTR was documented to Code requirements by Ken Gordy of SwL as Report No. 930635-2 from the welding variables recorded by Copper State Rubber, Inc., Specialties Co. during the welding of the test coupon and the results of guided-bend tests performed by SwL.


REVIEWED BY:

DATE: May 12, 1993 FILE NO.: 12-8075-00

American Bureau of Shipping

TWO WORLD TRADE CENTER, 106TH FLOOR
NEW YORK, NEW YORK 10048

93-HS57593

1

6 May 1993

WELDER QUALIFICATION TEST

Jay Williams

Welder's Name:

S.S. No:453-06-6487

Identification

QUALIFICATION TESTS:

SPECIFICATION - ASME CODE, SECTION IX, Boiler & Pressure
vessel code, 1989 Ed, 1990 ad.

WELDING PROCESS - Semi-Auto: GMAW-S - Manual: SMAW

JOINT TYPE - Single-V-Groove Weld with no backing

BASE MATERIAL TYPE - AISI 4130, API 7Sk designation

BASE MATERIAL THICKNESS/SIZE - 1-1/2" thick

FILLER METAL TYPE - GMAW Spec 5.28 ER805-D2

SMAW Spec 5.5 E10018-D2

FILLER METAL "F" - NO. F-6, F-4

TEST POSITION - 1G Rolled

GUIDED BEND TEST RESULTS:

Specimen No.	Type	Results
S-1	Side	Satisfactory
S-2	Side	Satisfactory


POSITION AND TYPE WELD QUALIFIED:


MATERIAL GROUP: API 7Sk designation

FILLER METAL GROUP: GMAW 5.28 Spec ER805-D2

SMAW 5.5 Spec E10018-D2

	MATERIAL	THICKNESS/SIZE	POSITION
<u>GROOVE WELD:</u>	PLATE & PIPE	MAX TO BE WELDED	FLAT
<u>FILLET WELD</u>	PLATE & PIPE PLATE & PIPE	ALL ALL	FLAT FLAT


R.G. Carver, Surveyor


G.R. Lauritsen, Surveyor

NOTE: This Report evidences that the survey reported herein was carried out in compliance with one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping and is issued solely for the use of the Bureau, its committees, its clients or other authorized entities. This Report is a representation only that the vessel, structure, item of material, equipment, machinery or any other item covered by this Report has been examined for compliance with, or has met one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping. The validity, applicability and interpretation of this Report is governed by the Rules and standards of American Bureau of Shipping who shall remain the sole judge thereof. Nothing contained in this Report or in any notation made in contemplation of this Report shall be deemed to relieve any designer, builder, owner, manufacturer, seller, supplier, repairer, operator or other entity of any warranty express or implied.

American Bureau of Shipping



STATEMENT OF FACT

CERTIFICATE No.

93-HS57593

PORT OF

Houston, Texas

DATE 6 May 1993

This is to Certify that the undersigned Surveyor to this Bureau, did, at the request of Copper State Rubber/Specialties of Houston, Texas on the 28th day of April 1993 and in order to witness and report on Welder Qualification Test. For further particulars, see report as follows:

1. The following welder was tested in accordance with Section IX of ASME Boiler and Pressure Vessel Code and the American Welding Society Structural Welding Code. Weld Specimens were physically tested, examined and found satisfactory.

Jay Williams S.S. NO. 453-06-6487

2. For particulars on tests performed, material, electrodes and positions qualified for, see attached sheet.

R.G. Carver, Surveyor

G.R. Lauritsen, Surveyor

This Certificate evidences compliance with one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping and is issued solely for the use of the Bureau, its committees, its clients or other authorized entities. This Certificate is a representation only that the vessel, equipment, structure, item of material, machinery or any other item covered by this Certificate has met one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping. The validity, applicability and interpretation of this Certificate is governed by the Rules and standards of American Bureau of Shipping who shall remain the sole judge thereof. Nothing contained in this Certificate or in any Report issued in contemplation of this Certificate shall be deemed to relieve any designer, builder, owner, manufacturer, seller, supplier, repairer, operator or other entity of any warranty express or implied.

Report No.: 930949
 Date: July 16, 1993
 Client No.: 12-8075-00
 Page No.: 1 of 2

For compliance with
 UK DEN "OFFSHORE
 INSTALLATIONS
 (CONSTRUCTION AND SURVEY)
 REGULATIONS, 1974"



SOUTHWESTERN LABORATORIES, INC.

222 Cavalcade
 P.O. Box 8768
 Houston, Texas 77249
 Phone: (713) 692-9151
 Fax: (713) 696-6207

Copper State Rubber, Inc.
 P.O. Box 266084
 Houston, TX 77207

Attention: Mr. Roger Peace

REVIEWED
 as indicated in
 ABS Letter dated:

 DEC 20 1995

For compliance with the
 applicable parts of the
 Norwegian Petroleum
 Directorate's "ACTS,
 REGULATIONS AND
 PROVISIONS FOR THE
 PETROLEUM INDUSTRY"

Projects: Charpy Impact Testing of a Procedure Qualification Test Weld

PROJECT INFORMATION

WELDING PROCEDURE:	Previously qualified WPS No. 911171-1 (supported by PQR No. 911171-2)
WELDMENT AS-RECEIVED:	AISI 4130, as-welded condition
IDENTIFICATION:	Heat No. A2769
SPECIFICATIONS:	ABS, Guide for the Certification of Drilling Systems, 1990

Post Weld Heat Treatment

SPECIFICATION:	PQR No. 911171-2
TIME:	2 hours at temperature
TEMPERATURE:	1200° F-1210° F
HEATING RATE:	212° F per hour from 700° F
COOLING RATE:	318° F per hour to 700° F

HEAT TREATMENT:	No. 60973	HEAT TREATMENT DATE:	July 12, 1993
-----------------	-----------	----------------------	---------------

Charpy Impact Test Results

SPECIFICATIONS:	0.015" lateral expansion	TEST TEMPERATURE:	Minus 30° C
LINEAR HAMMER VELOCITY:			16.8 feet per second
EFFECTIVE ENERGY:	264 foot pound force	TECHNICIAN:	M. Petersen
SPECIMEN TYPE & SIZE:	ASTM A 370, E 23, Type A; 10 mm x 10 mm		
LOCATION & ORIENTATION:	Weld metal, HAZ, and base metal, 2mm and 3mm from the fusion line, 1/16" below the surface and transverse to the weld axis		
TEST EQUIPMENT:	Tinius Olsen Serial No. 103222	TEST PROCEDURE:	ASTM A 370, E 23
TEST NO.:	60988	TEST DATE:	July 14, 1993

SPECIMEN IDENTIFICATION	WIDTH, INCHES	EFFECTIVE THICKNESS, INCHES	IMPACT ENERGY, FT- LBF	LATERAL EXPANSION, MILS	PERCENT DUCTILE FRACTURE
930949-1-1 (WELD)	0.394	0.316	60	40	25
930949-1-2 (WELD)	0.394	0.316	59	40	25
930949-1-3 (WELD)	0.394	0.316	62	42	25

930949-2-1 (HAZ)	0.394	0.316	49	32	25
930949-2-2 (HAZ)	0.394	0.316	101	60	50
930949-2-3 (HAZ)	0.394	0.316	40	22	25

SOUTHWESTERN LABORATORIES
Page 2 of 2


REPORT No. : 930949


COPPER STATE RUBBER COMPANY

SPECIMEN IDENTIFICATION	WIDTH, INCHES	EFFECTIVE THICKNESS, INCHES	IMPACT ENERGY, FT.- LBF	LATERAL EXPANSION, MILS	PERCENT DUCTILE FRACTURE
930949-3-1 (2 MM)	0.394	0.315	76	50	60
930949-3-2 (2 MM)	0.394	0.315	71	47	60
930949-3-3 (2 MM)	0.394	0.315	114	69	90

930949-4-1 (5 MM)	0.394	0.315	80	47	70
930949-4-2 (5 MM)	0.394	0.315	82	51	70
930949-4-3 (5 MM)	0.394	0.315	75	45	70

COMPLIANCE:	<i>The impact test results met the specification.</i>
-------------	---


KF/kf Reviewed By:


Prepared By:

**DNV**

Det norske Veritas Industry, Inc.
16340 Park Ten Place, Suite 100
Houston, Texas 77084
Tel: (713) 579-9003
Facsimile: (713) 579-1360

Det Norske Veritas Industry, Inc.
Form No: QAS-51-007.00

INSPECTION REPORT

Page 1 of 1

QAS Project Number: 51-05428-63	QAS Report Number: 51-05428-63-1
P.O. Number: 2322RP	Inspection Date: February 18, 1994
Main Vendor: Copper State Rubber	Insp. Location: Houston, Texas
Sub Vendor: N/A	Vendor Contact: Roger Peace
Vendor Ref: wps 911171-1	Vendor Phone: 713 644 1491
Req. No: N/A	Quantity: N/A
Part No: N/A	Serial No: N/A
EQUIPMENT DESCRIPTION: Weld Procedure Review	

Inspection Comments:


Purpose of Inspection: Review Weld Procedure.

Acceptance Criteria: ASME IX
NACE MR-0175
DNV Rules Drill(N), MOU

Reference Documents: None

Scope of Activity:

DNV reviewed the above Weld Procedure and found it to be in compliance with the above referenced standards with comments (see front page of WPS for comments).

FAX: Yes**Date:** 02/18/94**Signature:** Harold Melton **Distribution:**

Original to Client: Copper State Rubber
Copy to File: 51-05428-63 (D-217)

Attn:

Roger Peace

FAX #:

713 644 9830



February 18, 1994

Copper State Rubber
Attn: Roger Peace
6401 McGrew Street
Houston, Texas 77087

Reference: WPS No: 911171-1 Rev. 4

DNV Reference: 51-05428-63

Dear Mr. Peace

Please find enclosed one copy of the referenced weld procedures for your review and action as noted below:

- Reviewed with comments - for your records (For comments - see front page of W.P.S.)

The referenced weld procedure was reviewed against the following standards (latest revision):

<input checked="" type="checkbox"/> ASME IX	<input type="checkbox"/> DNV Tech. Note B-108
<input type="checkbox"/> AWS D1.1	<input type="checkbox"/> DNV Rules - Lifting Appliances
<input type="checkbox"/> API 6A	<input type="checkbox"/> DNV Rules - Submarine Pipelines
<input checked="" type="checkbox"/> NACE MR-01-75	<input checked="" type="checkbox"/> DNV Rules - Drill(N) for Mobile Offshore Units

If you should have questions or comments regarding this review, please do not hesitate to contact us and discuss it.

Regards,


Harold Melton
Q.A. Specialist

Procedure # RT-3

Radiographic Specialists, Inc.

4110 Mohawk Houston, Tx 77093

Phone: 281-449-1634

Fax: 281-449-1640

IP-Inadequate Penetration
IF-Inadequate Fusion
BTA-Burn Through Area
SL-Slag Line
SI-Slag Inclusion
P-Porosity
GP-Gas Pocket

C-Crack
IU-Internal Undercut
OU-Outside Undercut
LC-Low Crown

Page: 1 OF: 1
Date: 5-17-85
SIO: CSR48608-PA 12-B
PIO: 3051 RF
Spec/Heat/Other: ASME SEC VIII DIV 1 UG-27

Customer: Copper State Rubber

Job Location: RST

#	Seam #	Film #	Matl Dia.	Thk	Acc Y N	Remarks	#	Seam #	Film #	Matl Dia.	Thk	Acc Y N	Remarks
1		1-2	410.25				23						
2		2-3					24						
3		3-4					25						
4		4-5					26						
5							27						
6							28						
7							29						
8							30						
9							31						
10							32						
11							33						
12							34						
13							35						
14							36						
15							37						
16							38						
17							39						
18							40						
19							41						
20							42						
21							43						
22							44						

IDENTIFICATION

5" PIPE PQR TEST TONY
ADAMS

Single Or Double Wall: DLW Material: C/S Thickness: 3/4"
Single Or Double Viewing: SV Penetrameter: 20F Screen: 100S
Mapping Loc. When App.: 200 No. Of Exp: 4 Film Brand: AGFA
Min. Source To Film Distance: 60" Focal Spot Size: 146 Designation: D4
Isotope Used: Ir192
Depart Shop: _____ Arrive Job: _____ Depart Job: _____ Arrive Shop: _____

Film Total: 4 Stand-By: _____ No Of Film Per Cassette: _____
Technician: J. Mitchell Level: III Customer: Ken 507-0

The results reported represent opinions only and are not to be considered as warranties or guarantees of quality, classification, or usability of material examined. We shall assume not further responsibility for radiographs following the acceptance by the customer's field representative upon signing of field report. In no event shall the liability of Radiographic Specialists, Inc., as to any items inspected or tested (including any liability as to selection and/or results of such test) exceed the charge of Radiographic Specialists, Inc. for the inspection of such items.

RADIOGRAPHIC SPECIALISTS, INC.

4110 MOHAWK
HOUSTON TX 77093

PHONE (281) 449-1634
PAX (281) 449-1640

RESULTS OF TEST ON STEEL SPECIMENS

TO: COPPER STATES RUBBER/SPECIALTIES COMPANY

DATE: 05-31-05

LAB TEST NO: 05-31-9036

MATERIAL: _____ CUSTOMER JOB NO: _____

SPEC. IDENTIFICATION: 5" PIPE PQR TEST TONY ADAMS

Other Test

CHARPY IMPACT -30 DEG F

WELD METAL	HAZ.
55 FT LBS 30% SHEAR .048 LAT EXP	125 FT LBS 60 % SHEAR .091 LAT EXP
60 FT LBS 30% SHEAR .062 LAT EXP	120 FT LBS 60% SHEAR .085 LAT EXP
55 FT LBS 30% SHEAR .048 LAT EXP	125 FT LBS 60 % SHEAR .091 LAT EXP

WITNESS BY: _____ RADIOGRAPHIC SPECICALISTS, INC.

COPIES: _____ BY: TIM BRADLEY III



8902 N. MAIN
HOUSTON, TX 770220
Ph: 713-692-3410 Fax: 713-692-3910

Printed: 05/18/2005 0:00:20AM

Page 1 of 1

Certification

Order Number



35022

Customer: 00000074
SPECIALTIES COMPANY
6401 MC GREW
HOUSTON, TX 77087

Shipped To:
WILL CALL
6401 MC GREW
HOUSTON, TX 77087


Customer Purchase Order No.	Customer Shipper No.	Material Type	Mat'l Heat Code	Lot Number					
48619		ANY							
Process: STRESS RELIEVE									
<u>PROCESSING SPECIFICATIONS</u>									
Requirement	Specified	Qty Tested	Test Results						
Line#	Quantity	Weight	Part Number/Description	Revision					
1	1	21.0	6" OD X 4-1/4" ID X 13" LENGTH						
2			WELD TEST COUPON						
3			ID NOS:CSR-48608-1-A & 48608-2-B						
Operation	Spec Temp Range	Specified Soak Time	Furnace# Load#	Atmos/Dpt CarbPot	Q-Media Q-Temp	Start Date	Time In	Time Out	Date Complete
STRESS	1200	1:00	3			05/18/2005	2:45	6:30	05/18/2005

COMMENTS

 JAMES MUSGROVE	 Date Signed
---	---

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

REVIEW OF REPUBLIC
WORK ORDER ☐ CERTS ☒
TO CUSTOMER REQUIREMENTS
DATE 5/18/05

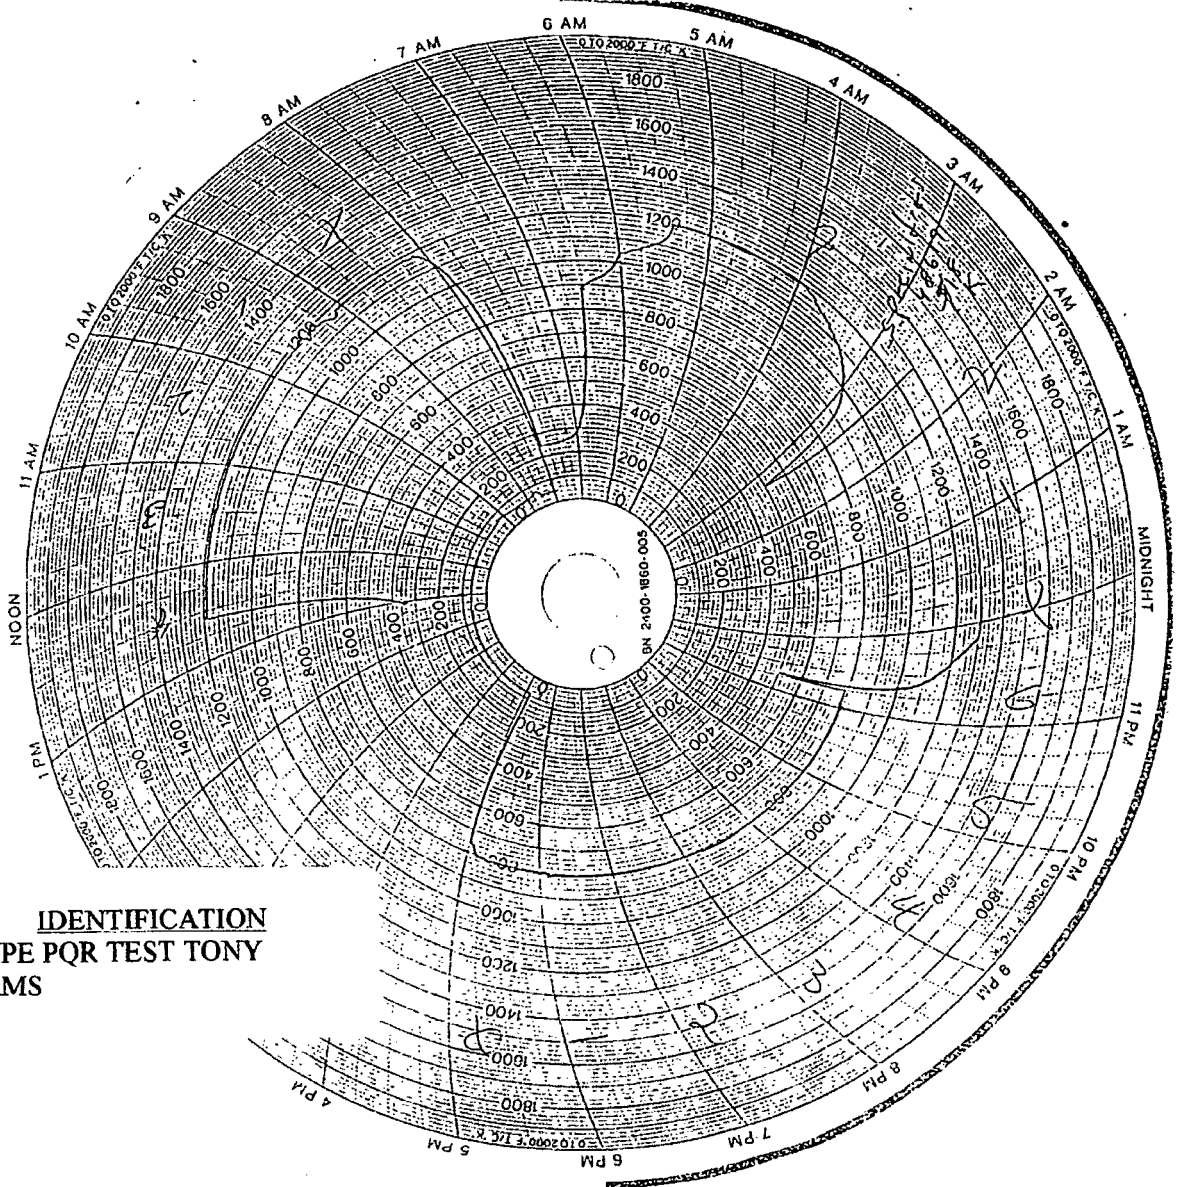

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

RESURGENT HEAT TREAT, INC.
 Houston, Texas

Customer SPC Industries Company
 Description Ø 6"00 X 4 1/2" F.W. X 12" length
 P.Q. 48619 SO 1
 Furnace #3 Serial No. 1
 Batch 5-18-05 Heat No. 1
 Temperature 1200° Time 1hr

Weld Test Coupon
 ID No: CSR-48608-1-A +
 48608-2-0.



LTV COPPERWELD
MECHANICAL GROUP SHELBY
SHELBY, OHIO 44875-1471
Telephone 419/342-1200 FAX: 419/342-1437

MATERIAL TEST REPORT

QS9000/ISO 9002 CERTIFIED

FAXED

SHELBY ORDER NO
140562

C U S T O M E R	TUBULAR STEEL INC 1031 EXECUTIVE PARKWAY DRIVE ST LOUIS MO 63141		SPECIFICATION ASTM A519 96		CUSTOMER ORDER 4538	
	GRADE 4130		SIZE/O.D. x I.D. x WALL 6.000 X 4.000 X 1.000		QUANTITY 8214 LB	
CONDITION		SMLS HF HEAT TREATED QUENCH & TEMPER ELECTRIC FUR		PART NO.		DATE 02/15/01
HEAT NO.		SMLS HEAT TREATED QUENCH & TEMPER ELECTRIC FUR		SHIPPED 02/15/01		DATE 02/15/01

HEAT NO.	CHEMICAL ANALYSIS												GRAIN SIZE
	C	Mn	P	S	Si	Ni	Cr	Mu	Cu	V	Al	OTHER	
14086	.31	.52	.009	.018	.230	.110	.960	.180	.120	.004	.022	.0002	6-8

MECHANICAL PROPERTIES										MAGNAFLUX	
HEAT NO.	LOAD NO.	YIELD PSI	TENSILE PSI	ELONG %	RED AREA %	HARDNESS RHN ROCKWELL		IMPACT FT.-LBS		FREQ.	SEVERITY
14086	T2692147	84100	103800	2.0" 29	68	RC 19		SIZE 10.0X10.0 TEMP F -50 RESULTS 112 77 115			

JOMINY HARDENABILITY (EXPRESSED IN 16THS)																
HEAT NO.	1	2	3	4	5	6	7	8	10	12	14	16	20	24	28	32
14086	51	50	49	47	42	39	36	33	31	29	29	28	25	26	24	24

J-K RATING				SLAG-OXIDE RATING			
HEAT NO.	A	B	C	D	INCOT	OXIDE	SLAG

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

MELT SOURCE	ESG	THIS TEST REPORT NOTARIZED WHEN REQUIRED SWORN AND SUBSCRIBED BEFORE ME THIS _____ DAY OF _____
OTHER INSPECTION MACRO ETCH: S2 R1 C2 NON DESTRUCTIVE TESTED Non-Destructive Tested NACE STD, MRO175, REV-1993 PARAGRAPH 3.		

NOTARY PUBLIC

Brian M. Clark
Brian M. Clark, Chief Metallurgist

MATERIAL SUBMITTED TO THE SPECIFICATION(S) SHOWN ABOVE. ALL ADDITIONAL SPECIFICATIONS ARE NOTED OR WARRANTED. THIS TEST REPORT SHALL NOT BE ALTERED OR REPRODUCED EXCEPT BY LTV.



Specialties Company
copper state rubber, inc.

6401 McGrew St.
Houston, Texas 77087
713-644-1491
713-644-9830 Fax
csrhouston@msn.com

ADDENDUM

WELDING PROCEDURE SPECIFICATION, WPS NO.: 911171-1
PROCEDURE QUALIFICATION RECORD, PQR NO.: 911171-2

COMPANY: COPPER STATE RUBBER, INC./SUBSIDIARY OF SPECIALTIES
COMPANY

- REVISION 1: DATE 1-31-92 – CORRECT TYPOGRAPHIC ERROR
 STRINGER PASS, AMPERES AND VOLTS
- REVISION 2: DATE 5-12-93 – JAY B. WILLIAMS I.D. NO.: 453-06-6487
 QUALIFIED TO THIS WPS; WQTR NOS.: 930635-1 AND
 930635-2
- REVISION 3: DATE 6-14-93 – CORRECT TYPOGRAPHIC ERROR SMAW
 PROCESS, AMPERES AND VOLTS
- REVISION 4: DATE 7-16-93 – WPS QUALIFIED FOR CHARPY IMPACTS
 AT -30°C; SwL REPORT NO.: 930949
- REVISION 5: DATE 5-31-2005 – CHANGE STRESS RELIEVE TIME FROM
 2 HOURS TO 1 HOUR

REVIEWED REV. 5
Nilesh D. Mittal
24 JUNE 2005



CERTIFICATION

Specialties Company
14141 S. WAYSIDE DR.
Houston, TX 77048 USA

Certification ID: 38120-1
Date: 11/21/2017
Cert Date: 11/21/2017
Purchase Order: 7494
Material: ANY

Page 1 of 1

We are pleased to provide you with the following Certification.

Part Number	Part Description	Qty	Weight
NONE	3"CK W/4-1/16 10M FLANGE, S/N: H1263-H1266	4	820.00
NONE	4"CK W/4-1/16 10K HUBS, S/N: 80868-1,2	2	0.00

Customer Requirements						
Inspection Type	U Of M	Lower Spec	Lower Control	Target Value	Upper Control	Upper Spec


Results			
Inspection Type	Scale	Minimum	Maximum

Operation


STRESS RELIEVE: 1200 FOR 1HR

Certification Statement

THIS MATERIAL HAS BEEN STRESSED PER CUSTOMER REQUIREMENTS

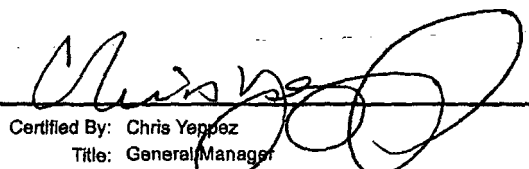
Certified By: Chris Yegorov
Title: General Manager
Date: 11/21/2017

All work is accepted subject to the following conditions (adapted by the Metal Treating Institute): It is generally recognized that even after all science known to us and capable men with years of training, there remain hazards in heat treating. Therefore, our liability to our customers shall not exceed twice the amount of our charges for the work done on any materials, (first I reimburse for the charges and second to compensate in the amount of the charges), except by written agreement. Warranty will be assumed only when made in writing and signed by both you and us. In such event, a higher charge will be made for our services. No claims for shortages in weight or amount will be entertained unless presented within five (5) working days after receipt of materials by customer. No claims will be allowed for shrinkage, expansion, deformity, or rupture in treating or straightening except by written agreement, as above, nor in any case for rupture caused by subsequent grinding. Whenever we are given material with detailed instructions as to treatment, our responsibility shall end with the carrying out of those instructions. Failure by a customer to indicate plainly and correctly the kind of materials, (Make, Brand, and Grade of Steel), to be treated, shall cause an extra charge to be made to cover any additional expense incurred as a result thereof. It shall be the duty of the customer to inspect the merchandise immediately upon return, and in any event claims must be reported prior to the time that any further processing, assembling or any other work has been done on said material. We will accept no responsibility for Gas Nitrided surface hardness, case depth, or dimensional change on material which has not been pretreated to a Martensitic Microstructure with a base hardness of 25-34 RC. Nitride absorption and surface hardness are directly correlated to the precondition of the material to be Gas Nitrided. No agent or representative is authorized to alter these rules and conditions, except in writing duly approved by us.

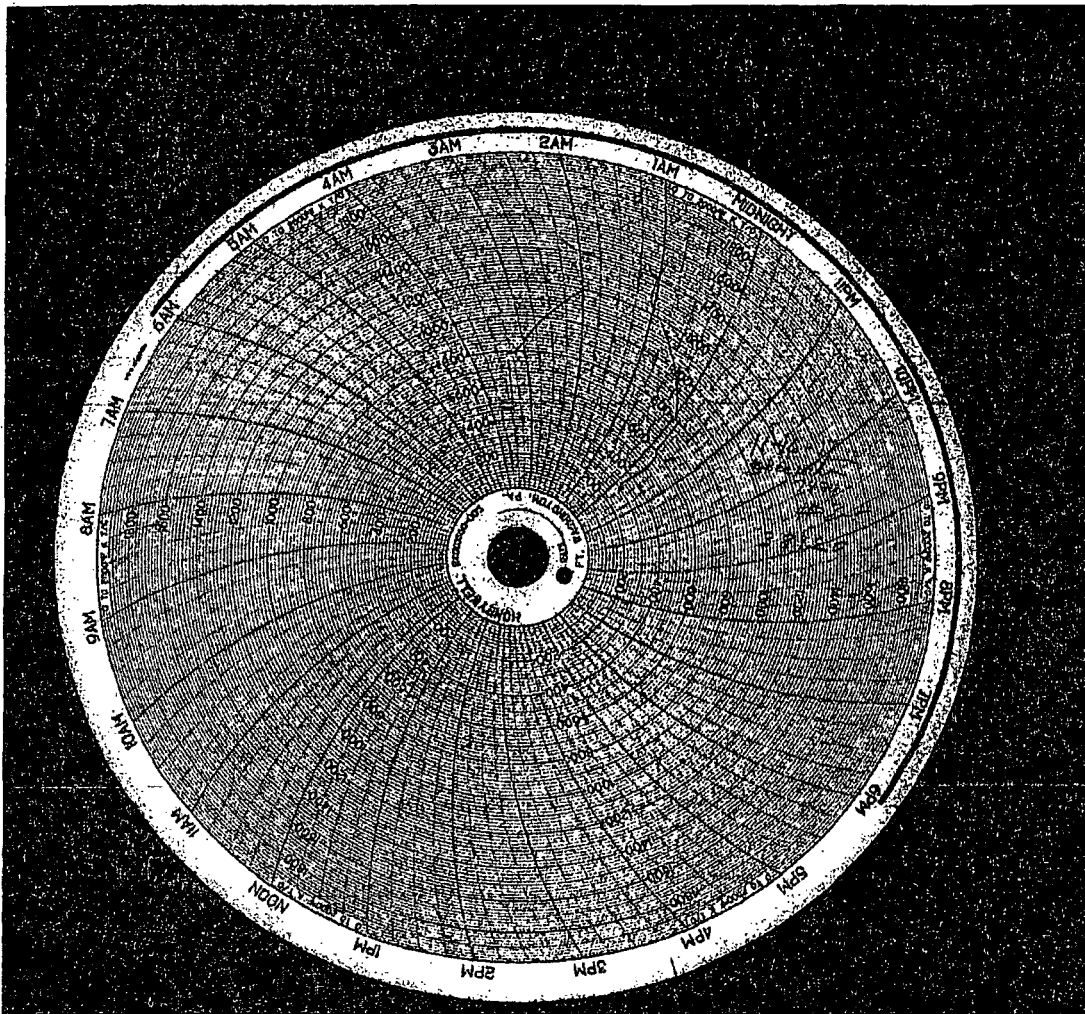

Part Number	Part Description	Quantity	Wt. Each	Wt. Extended
NONE	3"CK W/4-1/16 10M FLANGE	4	205.00	820.00
S/N: H1263-H1268				
NONE	4"CK W/4-1/16 10K HUBS	2	0.00	0.00
S/N: 80868-1,2				

SPECIALTIES COMPANY				
SEE ABOVE				
PO	7494	Ref. No.	38120	
Quantity	3	Part No.	SEE ABOVE	
Date	11/16/17	Qualification	SEE ABOVE	
Notes	S/R	Temp	1200F	Time 1 HRS

Procedure # RT-3

Radiographic Specialists, Inc.

4110 Mohawk Houston, Tx 77093

Phone: 281-449-1634

Fax: 281-449-1640

IP-Inadequate Penetration
 IF-Inadequate Fusion
 BTA-Burn Through Area
 SL-Slag Line
 SI-Slag Inclusion
 P-Porosity
 GP-Gas Pocket

C-Crack
 IU-Internal Undercut
 OU-Outside Undercut
 LC-Low Crown

Page: _____ Of: _____

Date: 11/20/17

S/O: _____

P/O: 7815

Spec/Heat/Other: ASME SEC VIII SEC. VIII DIV.1 UW 51

Customer: COPPER STATE RUBBER

Job Location: R.S.I.

#	Seam #	Film #	Matl Dia.	Thk	Acc y N	Remarks	#	Seam #	Film #	Matl Dia.	Thk	Acc y N	Remarks
1	H1263	1 2	3"	7/8"	X		23						
2		2 3			X		24						
3		3 4			X		25						
4		4 1			X		26						
5	H1264	1 2			X		27						
6		2 3			X		28						
7		3 4			X		29						
8		4 1			X		30						
9	H1265	1 2			X		31						
10		2 3			X		32						
11		3 4			X		33						
12		4 1			X		34						
13	H1266	1 2			X		35						
14		2 3			X		36						
15		3 4			X		37						
16		4 1			X		38						
17							39						
18							40						
19							41						
20							42						
21							43						
22							44						

Single Or Double Wall: D.W. Material: C/S Thickness: 7/8"

Single Or Double Viewing: S.V. Penetrometer: B PACK Screen: .005

Mapping Loc. When App.: 90 DEG. No. Of Exp: 16 Film Brand: AGFA

Min. Source To Film Distance: CONT. Focal Spot Size: .146

Min. Film to Obj. Distance: Contact Isotope Used: IR192 Designation: D5

Depart Shop: _____ Arrive Job: _____ Depart Job: _____ Arrive Shop: _____

Film Total: 16 Stand-By: _____ No Of Film Per Cassette: 1

Technician: TIM BRADLEY Level: III Customer: _____

The results reported represent opinions only and are not to be considered as warranties or guarantees of quality, classification, or usability of material examined. We shall assume not further responsibility for radiographs following the acceptance by the customer's field representative upon signing of field report. In no event shall the liability of Radiographic Specialists, Inc., as to any items inspected or tested (including any liability as to selection and/or results of such test) exceed the charge of Radiographic Specialists, Inc. for the inspection of such items.

INDEPENDENCE CONTRACT DRILLING
 P.O. NO.: PO00116446
 DATE: FEBRUARY 23, 2018
 FILE NO.: CSR / SPECO-81069

RADIOGRAPHIC SPECIALISTS, INC.

4110 MOHAWK
HOUSTON TX 77093

Ph. 281-449-1634

Фак 281-449-1640

TO: COPPER STATES

DATE: 11/20/17

P. O. NO. 7815

JOB NO.

DEL SLIP

LOCATION: R.S.I.

MAGNETIC PARTICLE INSPECTION REPORT

[illegible]

Materials Used 1 CAN 850A

APPLICABLE SPECIFICATION SE709

ACCEPTANCE STANDARD ASME SEC VIII APP6 PAR6.4

SCOPE OF EXAMINATION 100% OF WELDED AREA

PROCEDURE NO. MT-5 Rev. 14

METHOD: WET^X_____ DRY

INSTRUMENT USED CONTOUR PROBE

MODEL: DA100 S/N. 7178

AMPERES: 10 #LIFT 6.5 AMP.

CURRENT: ACX DC

FLUORESCENT

BLACK LIGHT:

CALIBRATION:

LIGHT METER:

PREPARED BATH CIRCLE SAFE

TYPE: 850A

BATCH NO: 19685

TECHNICIAN TIM BRADLEY

LEVEL III

WITNESSED BY

CUSTOMER

TIME LEFT RSI: _____

TIME ARRIVED RSI: _____

Radiographic Specialists, Inc

(281)449-1634

4110 Mohawk Houston, Texas 77093

Fax (281)449-1640

TO: COPPER STATE RUBBER

Date: 11-20-17

P.O.: 7815

Job No.:

Location: R.S.I.

BRINELL HARDNESS

[illegible]

API 16C

TECHNICIAN: TIM BRADLEY

CUSTOMER: III



14141 S. Wayside Drive
Houston, Texas 77048

Phone 713-644-1491
Fax 713-644-9830
www.copperstaterubber.com
sales@copperstaterubber.com

FIELD TEST PROCEDURES FOR USED COPPER STATE RUBBER CHOKE/KILL AND SUPER CHOKE/KILL HOSE

VISUAL INSPECTION ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR

1. ARRANGE HOSE SO THAT IT CAN BE OBSERVED FROM ALL ANGLES.
2. CONDUCT THE EXAMINATION FOR EXTERNAL DAMAGE TO THE COVER, END STRUCTURE, AND TERMINATING CONNECTORS.
3. IF THE COVER HAS GOUGING OR TEARS FROM NORMAL ABRASION, THIS CAN BE REPAIRED BY UTILIZING A RUBBER REPAIR KIT. THE SOLE PURPOSE OF THE COVER IS TO PROTECT THE INTERNAL REINFORCEMENT WIRES THAT HOLD THE PRESSURE.
4. IF NO INTERNAL WIRES ARE EXPOSED, REPAIR THE COVER DAMAGE BEFORE IT BECOMES WORSE AND EXPOSES THE INTERNAL REINFORCEMENT WIRES TO THE EFFECTS OF THE ELEMENTS. FULL PRESSURE INTEGRITY REMAINS.
5. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE EXPOSED, CHECK FOR ANY TYPE OF RUST/DETERIORATION OR BREAKS. IF THE WIRES ARE NOT DAMAGED, CLEAN THE AREA AND REPAIR WITH RUBBER REPAIR KIT. FULL PRESSURE INTEGRITY REMAINS.
6. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE DAMAGED, THE HOSE SHOULD BE REMOVED FROM SERVICE IMMEDIATELY AND CONSIDERED UNSAFE FOR FURTHER SERVICE.

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

**VISUAL INSPECTION
ASSEMBLIES WITH STAINLESS STEEL PROTECTIVE ARMOR**

1. FOLLOW STEPS 1 AND 2 FOR ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR.
2. IF THE OUTER STL/ST PROTECTIVE ARMOR HAS BEEN BROKEN, EXAMINE THE RUBBER COVER FOR GOUGES OR TEARS FROM NORMAL ABRASION. THEN FOLLOW STEP 4 FOR ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR.
3. SECURE LOOSE ENDS OF PROTECTIVE ARMOR TO PROTECT AGAINST ADDITIONAL GOUGES OR TEARS TO RUBBER COVER.
4. HOSE ASSEMBLY SHOULD BE RETURNED TO COPPER STATE RUBBER, PHOENIX, ARIZONA USA AS SOON AS POSSIBLE FOR REPAIRS TO PROTECTIVE ARMOR.
5. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE EXPOSED, CHECK FOR ANY TYPE OF RUST/DETERIORATION OR BREAKS. IF THE WIRES ARE NOT DAMAGED, CLEAN THE AREA AND REPAIR WITH RUBBER REPAIR KIT. FULL PRESSURE INTEGRITY REMAINS.
6. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE DAMAGED, THE HOSE SHOULD BE REMOVED FROM SERVICE IMMEDIATELY AND CONSIDERED UNSAFE FOR FURTHER SERVICE.

CSR RECOMMENDS VISUAL INSPECTION WHENEVER POSSIBLE, ON A DAILY BASIS.

HYDROSTATIC TEST

1. TEST HOSE TO 1-1/4 TIMES MAX. ALLOWABLE WORKING PRESSURE WITH WATER, OIL, OR MUD BEING SURE ALL AIR HAS BEEN BLED OFF. HOLD FOR 15 MINUTES AFTER PRESSURE HAS STABILIZED

CSR RECOMMENDS HYDROSTATIC TEST AT APPROXIMATELY 6 MONTH INTERVALS ON RIG AND HOSE BE RETURNED TO OEM FOR INSPECTION AND RECERTIFICATION AT 5 YEARS FROM MANUFACTURE



COPPER STATE RUBBER

**14141 S WAYSIDE DR.
HOUSTON, TEXAS 77048
TEL: (713) 644-1491
FAX: (713) 644-9830**

WARRANTY TERMS AND CONDITONS


COPPER STATE RUBBER DRILLING HOSES ARE GUARANTEED FOR THE PERIOD OF 12 MONTHS (FROM DATE OF FIRST SERVICE) TO BE FREE FROM DEFECTS IN MATERIALS AND/OR WORKMANSHIP.

IN ORDER TO ESTABLISH A VALID WARRANTY CLAIM, CUSTOMER MUST GIVE NOTICE TO COPPER STATE RUBBER WITHIN 10 DAYS AFTER DISCOVERING THE DEFECT. WE WILL ADVISE IF HOSE SHOULD BE RETURNED TO FACTORY FOR INSPECTION (FREIGHT PREPAID). IF COPPER STATE DETERMINES HOSE TO BE DEFECTIVE, COPPER STATE WILL REPAIR OR REPLACE (AT ITS OPTION) THE HOSE IN QUESTION. ALL REPAIRS AND REPLACEMENTS WILL BE F.O.B. COPPER STATE RUBBER'S PLANT.

**REMOVAL OR WELDING OF END
FITTINGS WILL VOID WARRANTY**

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

5,000 psi BOP Schematic

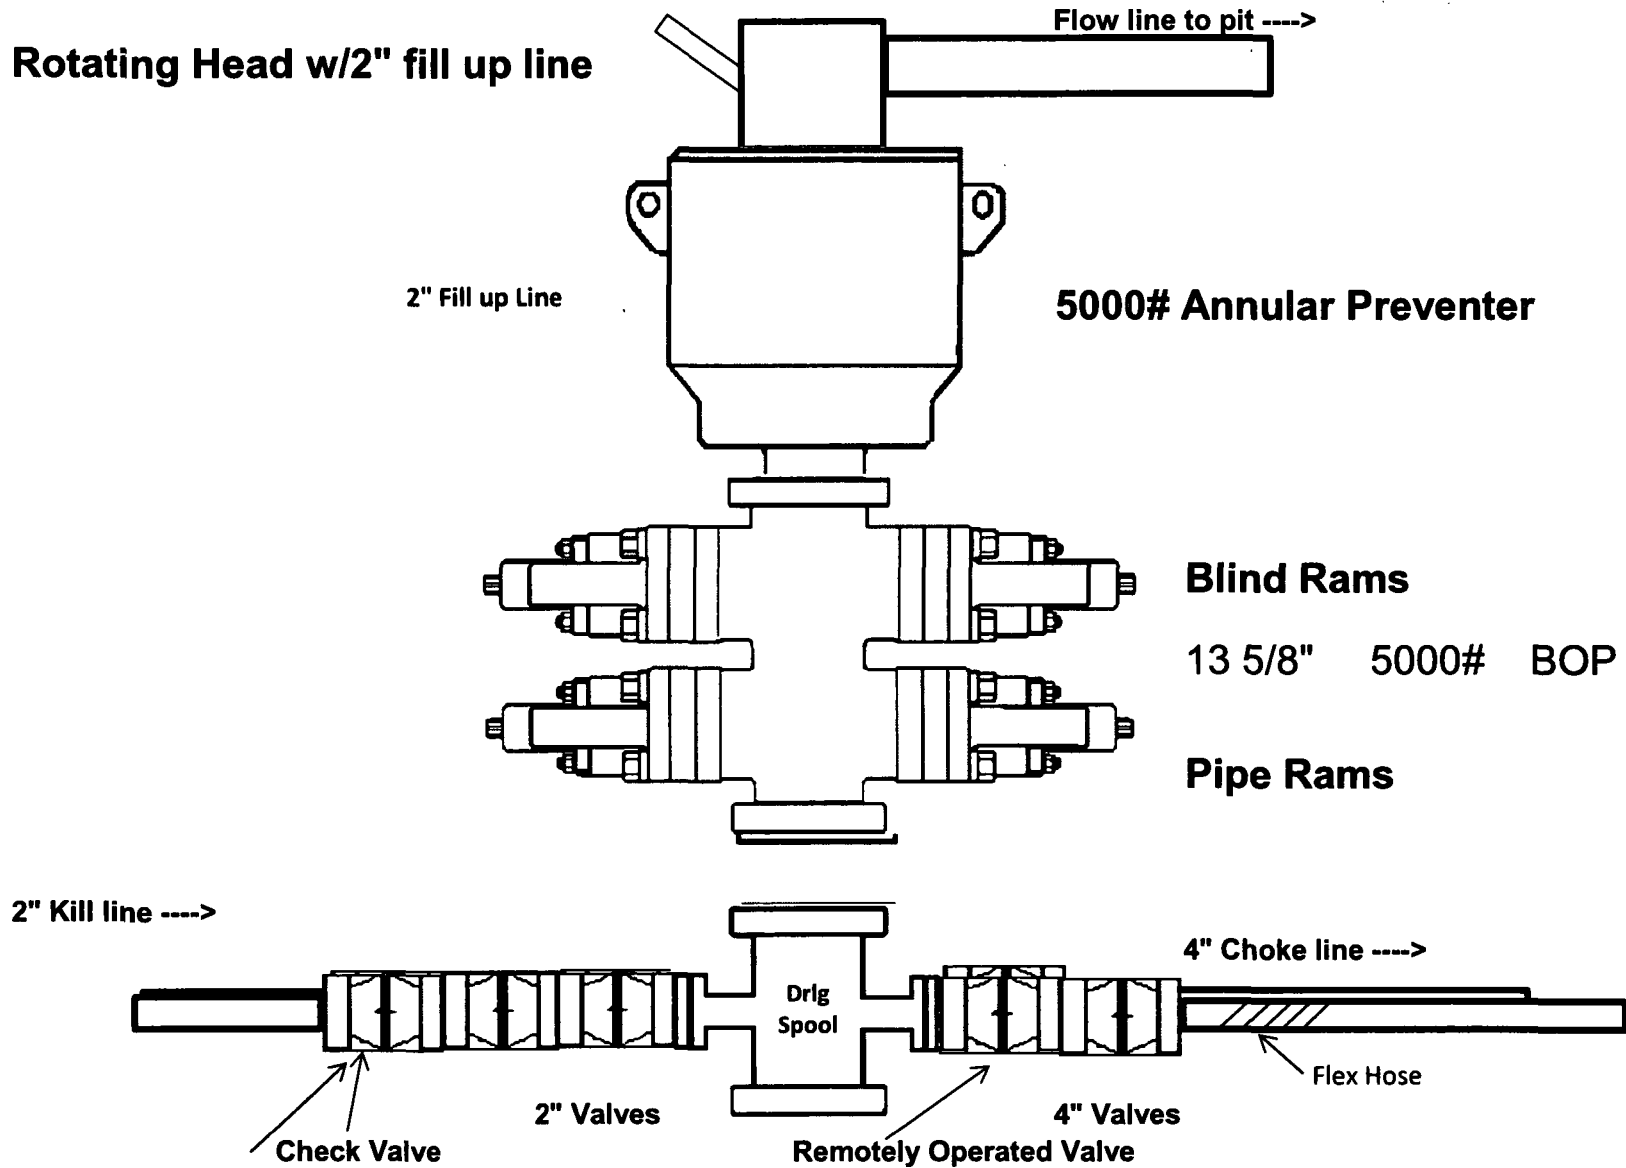

**INDEPENDENCE CONTRACT DRILLING
11601 N. GALAYDA STREET
HOUSTON, TX. 77086**

PURCHASE ORDER NO.: PO00116446

DATE: February 23, 2018

**COPPER STATE RUBBER/SPECIALTIES COMPANY
FILE: CSR / SPECO- 81069**

TAB 1

- I. CERTIFICATE OF REGISTRATION ISO 9001:2015
APIQR REGISTRATION NO.: 3042
- II. API CERTIFICATE OF ACCREDITATION FOR Q1
AND SPEC. 16C CERTIFICATE NO.:16C-0383

COPPER STATE RUBBER CHOKE / KILL HOSE, API SPEC. 16C MONOGRAMMED, FSL
3, TEMP RANGE B/P, 10,000 PSI WP, 15,000 PSI TEST, FIRE RESISTANT, WITH
BUTTWELD 4-1/16" 10K API FLANGE WITH S.S. LINED BX-155 RING GROOVE EACH
END. H2S SUITED.
1 EA. 3" ID X 75 FT.
S/N- 33851

TAB 2

- I. CSR CERTIFICATE OF COMPLIANCE
- II. COMPLETE ASSEMBLIES VISUAL INSPECTION/HYDROSTATIC
TEST REPORTS
- III. PRESSURE GAUGE CALIBRATION CERTIFICATE, S/N.: 111291-2
- IV. CHART RECORDER CALIBRATION CERTIFICATE, S/N.: 07459

TAB 3

- I. METAL COMPONENT REPORTS
 - A. INSERTS:
 - 1. BRENDLELL 14C1, ENCORE METALS HT-418595
 - B. 4-1/16" 10K API MAWP 6A FLANGE
 - 1. MACHINE SPECIALTY & MFG. HT-V4760

TAB 4

- I. WELDING PROCEDURES AND QUALIFICATION RECORDS
 - A. COPPER STATE RUBBER WPS/PQR NOS.: 911171-1 AND 911171-2, REV. 5 FOR INSERTS TO TERMINATING CONNECTOR WELDMENTS

TAB 5

- I. NDE REPORTS FOR END FITTINGS TO INSERT WELDMENTS
 - A. STRESS RELIEVING
 - 1. **REPUBLIC HEAT TREAT**
CERT. ID NO.: 38120-1
P.O. NO.: 7494
 - B. RADIOGRAPHIC INSPECTION
 - 1. **RADIOGRAPHIC SPECIALISTS**
P.O. NO.: 7815

TAB 6

- I. FIELD TEST PROCEDURES FOR USED COPPER STATE RUBBER ROTARY AND VIBRATOR HOSE ASSEMBLIES
- II. COPPER STATE RUBBER 12 MONTH WARRANTY TERMS AND CONDITION



Certificate of Registration

APIQR® REGISTRATION NUMBER

3042

This certifies that the quality management system of

COPPER STATE RUBBER, INC.

750 S. 59th Avenue

Phoenix, AZ

has been assessed by the American Petroleum Institute Quality Registrar (APIQR®) and found it to be in conformance with the following standard:

ISO 9001:2015

The scope of this registration and the approved quality management system applies to the

Design and Manufacture of Oilfield, Marine and Other Industrial Hoses

APIQR® approves the organization's justification for excluding:

No Exclusions Identified as Applicable

Effective Date: MARCH 28, 2017

Expiration Date: APRIL 21, 2019

Registered Since: APRIL 21, 2016

Vice President, API Global Industry Services

Accredited by Member of
the International
Accreditation Forum
Multilateral Recognition
Arrangement for Quality
Management Systems



This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of APIQR's Registration Program and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001 standard requirements may be obtained by consulting the registered organization. This certificate has been issued from APIQR offices located at 1220 L Street, N.W., Washington, D.C. 20005-4070, U.S.A., it is the property of APIQR, and must be returned upon request. To verify the authenticity of this certificate, go to www.api.org/compositelist.



2015 0191 01.16



**American
Petroleum
Institute**



2015-313

Certificate of Authority to use the Official API Monogram

License Number: 16C-0383

ORIGINAL

The American Petroleum Institute hereby grants to

**COPPER STATE RUBBER, INC.
750 S. 59th Avenue
Phoenix, AZ**

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-16C** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **16C-0383**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Flexible Choke and Kill Lines at FSL 0, FSL 1, FSL 2, FSL 3

QMS Exclusions: No Exclusions Identified as Applicable

Effective Date: MARCH 28, 2017

Expiration Date: APRIL 21, 2019

To verify the authenticity of this license, go to www.api.org/compositelist.

Vice President, API Global Industry Services



14141 S. Wayside Drive
Houston, Texas 77048

Phone 713-644-1491
Fax 713-644-9830
www.copperstaterubber.com
sales@copperstaterubber.com

February 23, 2018

Independence Contracting Drilling
11601 N. Galayda St.
Houston, Texas 77086

Subject: Purchase Order No.: PO00116446
Date: February 23, 2018
Specialties Company File No.: CSR / SPECO-81069

Equipment: Copper State Rubber Choke/Kill Hose Assembly, 10KSI MAWP X 15KSI
T/P, API 16C FSL3, Fire Resistant Cover, Complete 4-1/16" 10KSI
MAWP Flange With BX155 SS Lined Ring Groove Each End. H2S
Suited.
1EA: 3" ID X 75Ft. S/N-33851

CERTIFICATE OF COMPLIANCE

This is to certify the above referenced equipment meets or exceeds the following requirements and were manufactured from same material specification and manufacturing methods as prototype assemblies for referenced specifications.

- I. COMPLETE HOSE ASSEMBLY
 - A. API Certificate of Accreditation for Spec: Q1 (Quality Programs) and Spec.: 16C
 - 1. Copper State Rubber, Inc. Certificate No.: 16C-0383
 - B. CSR Specification No.: 090-1915C
- II. PHYSICAL/CHEMICAL PROPERTIES OF METAL COMPONENTS
 - A. API Spec. 6A, latest edition
 - B. API Spec. 16A, latest edition
 - C. NACE Standard MR0175, latest edition
- III. WELDMENTS/NDE REQUIREMENTS
 - A. Section IX, ASME Boiler & Pressure Code, 1986 Ed., 1987 Add.
 - B. CSR/Specialties Company WPS/PQR Nos.: 911171-1, and 911171-2, Rev. 05 dated June 2005

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.

III. WELDMENTS/NDE REQUIREMENTS (continued)

- C. API Spec. 6A, latest edition
- D. API Spec. 16A, latest edition

Sincerely,

A handwritten signature in black ink, appearing to read "Joe Leeper", with a stylized flourish extending to the right.

Joe Leeper,
Technical Department



Visual Inspection / Hydrostatic Test Report

Manufacturer	Copper State Rubber Inc.
Hose Type	Choke and Kill
Pressure Rating	10,000 PSI MAWP X 15,000 PSI T/P
Spec Number	090-1915C-48
FSL Rating	FSL 3

Serial Number	33851
Size ID	3"
Length	75'
Date	December 9, 2017
Shop Order Number	31162

Connections Description: 4 1/16" 10K API FLANGE WITH SS INLAID BX-155 RING GROOVE EACH END

Traceability of Terminating Connectors

	Insert	Male	Nut	Female	Flanges	Hubs	Other
Connector 1	14C1				V4760		CSR-H1263
Connector 2	14C1				V4760		CSR-H1265

Comments _____

Calibrated Devices

Pressure Recorder	07459	Calibration Date	1/23/2017
Pressure Gauge	111291-2	Calibration Date	1/23/2017

*This report signifies that the product has been visually inspected for defects in the interior tube, recess, gasket, cover and branding and all have been found to be conforming.

Comments _____

Hydrostatic Testing Requirements

Length after test

60 Min @ 15,000 psi (-0/+500 psi)


75' OAL

Witness By: _____

Supervisor

Phil Spider

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

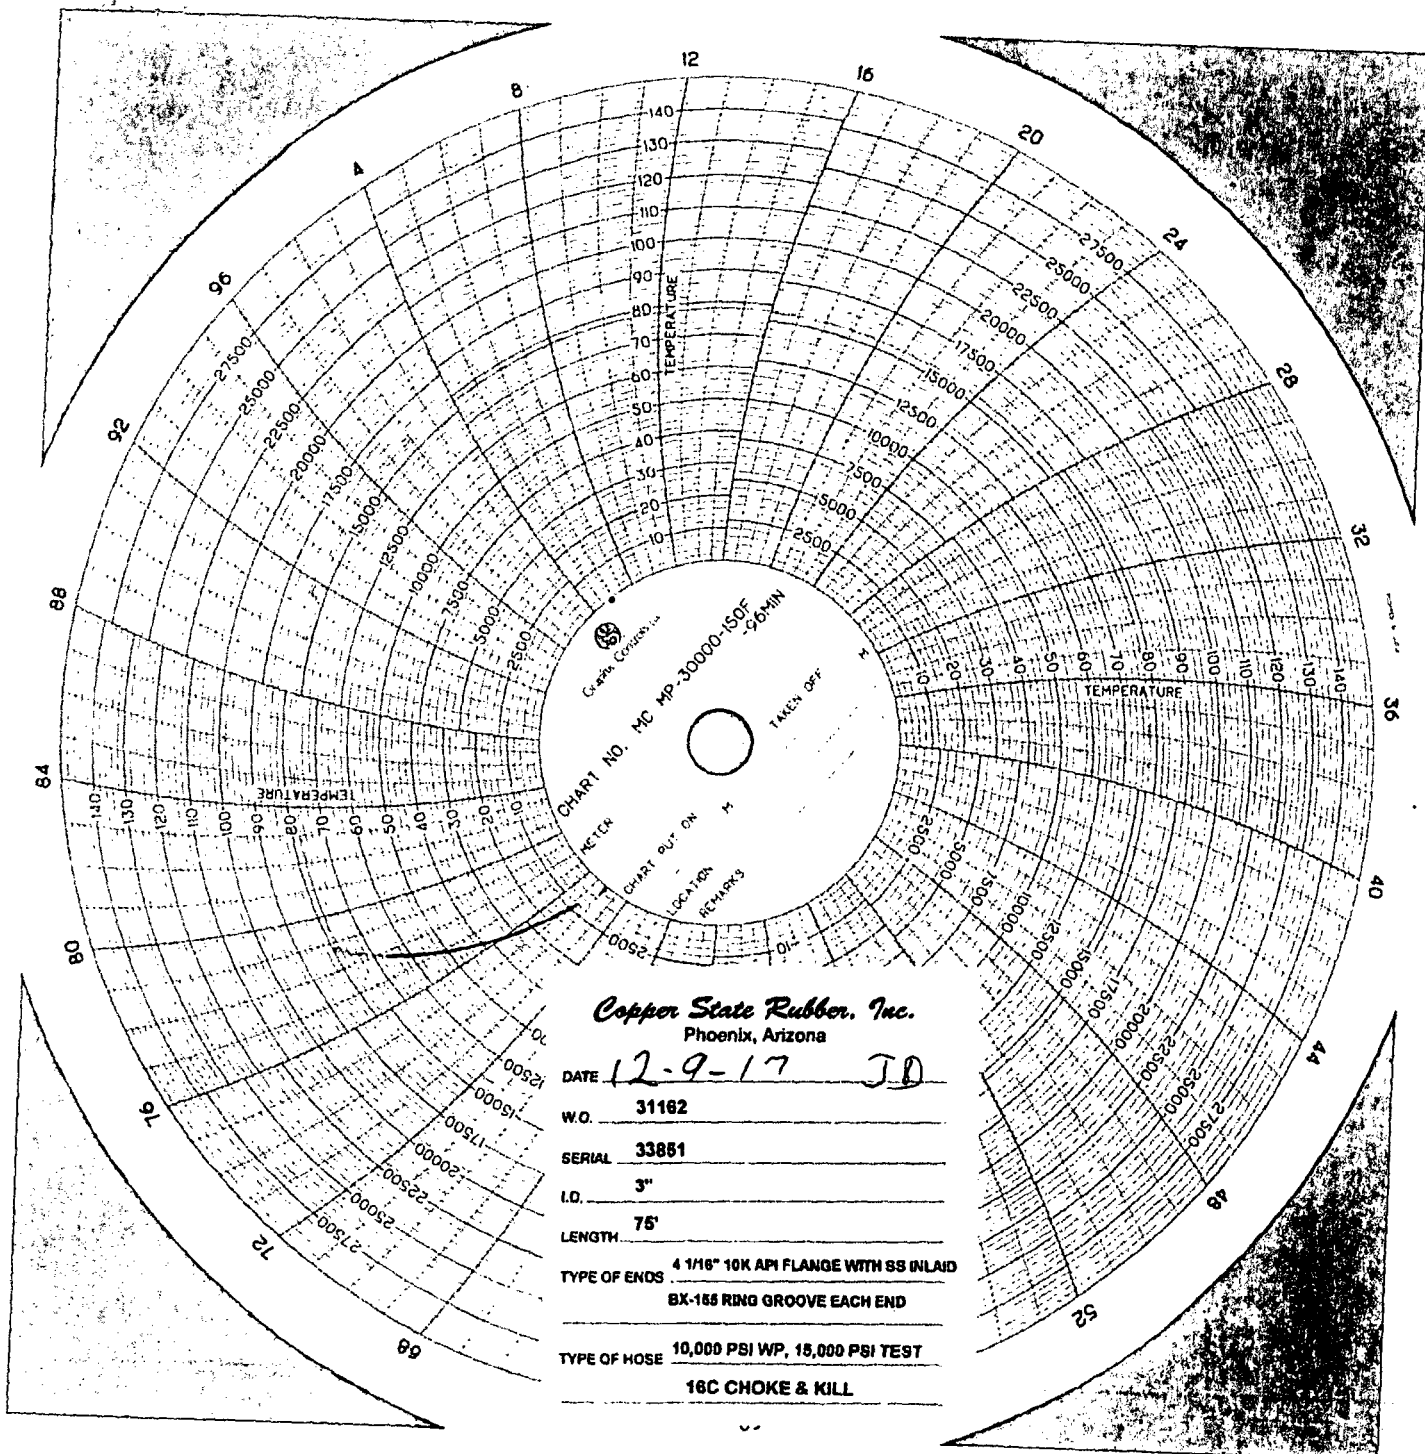

Copper State Rubber, Inc.
Phoenix, Arizona

DATE 12-9-17 JD

W.O. 31162

SERIAL 33851

I.D. 3"

LENGTH 75'

TYPE OF ENDS 4 1/16" 10K API FLANGE WITH SS INLAID

BX-166 RING GROOVE EACH END

TYPE OF HOSE 10,000 PSI WP, 15,000 PSI TEST

16C CHOKE & KILL

Certificate of Calibration

Certificate # 1702331

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043



Equipment Tested

Description : McDaniel Pressure Gauge	Calibration Date : January 23, 2017 Calibration Due : January 23, 2018
Model # : None Visible	Identification # : 111291-2
Range : 0-30000 PSIG	Serial # : None Visible
Accuracy : .50 % of Full Scale	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.100-2013

Measurement Data

% of Span	Gauge Reading	Actual Pressure	Reading Error	Maximum Allowable
20 %	6000	6054.9	54.9	150.0
40 %	12000	11995.2	-4.8	150.0
60 %	18000	17976.6	-23.4	150.0
80 %	24000	23965.8	-34.2	150.0
100 %	30000	29943.9	-56.1	150.0

Ambient Temperature : **19.5° C**

Relative Humidity : **Between 20 & 60%**

Comments :

Uncertainty of Measurement is $\pm (19 + 0.6R)$ psi
Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor k=2
The results obtained relate only to the item calibrated
Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty.
It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request.

Standards Used

Procedures : PTS Procedure Manual Section SCP-01 High Pressure Gauge	Standard : PTS 123 Sens otac Pressure System Cert # 1-132212 Due: 12 Jan 2018
---	--

Calibration Performed By K. Cassidy

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCSL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.
Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.
This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

Page 1 of 1

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Certificate of Calibration

Certificate # 1702332

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043

APPROVED
AS II
Quality Dept

Equipment Tested

Description : TechCal Pressure Gauge	Calibration Date : January 23, 2017 Calibration Due : January 23, 2018
Model # : Chart Recorder	Identification # : 07459
Range : 0-30000 PSIG	Serial # : 07459
Accuracy : .50 % of Full Scale	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.100-2013

Measurement Data

% of Span	Gauge Reading	Actual Pressure	Reading Error	Maximum Allowable
20 %	6000	5911.8	-88.2	150.0
40 %	12000	12075.7	75.7	150.0
60 %	18000	18085.6	85.6	150.0
80 %	24000	24090.2	90.2	150.0
100 %	30000	30045.1	45.1	150.0

Ambient Temperature : **19.5° C**

Relative Humidity : **Between 20 & 60%**

Comments :

Uncertainty of Measurement is $\pm (19 + 0.6R)$ psi
Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor $k=2$
The results obtained relate only to the item calibrated
Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty.
It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request

Standards Used

Procedures : PTS Procedure Manual Section SCP-01 High Pressure Gauge	Standard : PTS 123 Sensotec Pressure System Cert # 1-132212 Due: 12 Jan 2018
---	---

Calibration Performed By K Cassidy

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCSL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.
Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.
This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

Certificate of Calibration

Certificate # 1702332

Issued to: **Copper State Rubber, Inc.**
750 South 59th Avenue
Phoenix, Arizona 85043



Equipment Tested

Description : TechCal Temperature Gauge	Calibration Date : January 23, 2017 Due Date : January 23, 2018
Model # : Chart Recorder	Identification # : 07459
Range : 0-150° F	Serial # : 07459
Accuracy : 1.5 F	
Physical Condition as Received : Good	Service Performed : Calibration to Manufacturers Specifications and ASME B40.200 - 2008 (R2013)

Measurement Data in degrees F

Actual	Unit Under Test
50.06	50
100.11	100
150.09	150

Ambient Temperature : 19.5°C	Relative Humidity : Between 20 & 60%
Comments : AS RETURNED - Gauge Adjusted	
Uncertainty of Measurement is +/- .12 Deg C	
Measurement uncertainties stated represent an expanded uncertainty at approximately the 95% confidence level and a coverage factor k=2	
The results obtained relate only to the item calibrated	
Precision Technical Services makes Pass/Fail statements of compliance by comparing the calibration data against the tolerance(s) without factoring in the measurement uncertainty.	
It is your responsibility to determine if the uncertainty adversely affect your instrument(s) or process(es). Other decision rules may be employed upon request	

Standards Used

Procedures : PTS Procedure Manual Section : SCP 25 - Thermometer - Analog, Digital, Glass	Standard : PTS 111 ThermoWorks Reference Thermometer Certificate # 222834 Due: 02 Sep 2017 PTS 118 Techna Temperature Well Certificate # 161536 Due: 01 Jun 2017
---	---

Calibration Performed By **K. Canady**

The standards and calibration program at Precision Technical Services complies with the requirements of ANSI/NCCL Z540.3-2006, ANSI/ISO/IEC 17025:2005 and also to PTS Quality Manual, Rev 12, dated September 1, 2014 and where applicable to ISO 9001:2008.
Standards used in this calibration are traceable to the International System of Units (SI) through N.I.S.T. or recognized standard organizations.
This Certificate may not be reproduced except in full without the written approval of Precision Technical Services

1421

encoremetals

CERTIFICATE OF TEST

Page 01 of 02

 Certification Date
14-JUL-2014

CUSTOMER ORDER NUMBER

15916

ENCORE METALS US

789 NORTH 400 WEST

NORTH SALT LAKE UT 84054

Invoice Number

S160494

CUSTOMER PART NUMBER

SERIAL#G87

SOLD TO:	BRENDELL MANUFACTURING INC	SHIP TO:	BRENDELL MANUFACTURING INC.
	580 NORTH 400 WEST		580 NORTH 400 WEST
	NORTH SALT LAKE UT 84054		NORTH SALT LAKE UT 84054

Description: E4130 HR NORM Q&T BAR API 6A PSL3 NACE MR0175
 6-1/2 RD X 20' R/L Line Total: 19.5 FT
 HEAT: 418595 ITEM: 505824

Specifications:

NACE MR-01-75

AMS H 6875 A

ASTM A370 11

API 6A PSL 3

ASTM A29 12

ASTM A304 04

EN 10204 3.1

ASTM A322 07

CHEMICAL ANALYSIS

C	MN	SI	P	S	CR	NI	MO
0.313	0.56	0.25	0.014	0.003	1.0600	0.17	0.23
AL	CU	SN	TI	V	NB	AS	CA
0.025	0.28	0.014	0.0027	0.027	0.003	0.006	0.0015
SB	CO	PB					
0.001	0.011	0.002					

RCPT: R120906

COUNTRY OF ORIGIN : ITALY

MECHANICAL PROPERTIES

	YLD STR	ULT TEN	%ELONG	%RED	HARDNESS
DESCRIPTION	PSI	PSI	IN 02 IN	IN AREA	BHN
TEST PC/QTC	85862.0	104572.0	22.0	60.0	229
	YLD STR	ULT TEN	%ELONG	%RED	HARDNESS
DESCRIPTION				IN AREA	BHN
SURFACE					229

The above data were transcribed from the manufacturer's Certificate of Test after verification for completeness and specification requirements of the information on the certificate. All test results remain on file subject to examination.

We hereby certify that the material covered by this report will meet the applicable requirements described herein, including any specification forming a part of the description.

The willful recording of false, fictitious, or fraudulent statements in connection with test results may be punishable as a felony under federal statutes.

Material did not come in contact with mercury while in our possession.

DIANA JOHNSON

INSERT MATERIAL
 INDEPENDENCE CONTRACT DRILLING
 P.O. NO.: PO00116446
 DATE: FEBRUARY 23, 2018
 FILE NO.: CSR / SPEC0-81069

encoremetals

CERTIFICATE OF TEST

Page 02 of 02

Certification Date
14-JUL-2014

CUSTOMER ORDER NUMBER

15916

ENCORE METALS US
789 NORTH 400 WEST
NORTH SALT LAKE UT 84054

Invoice Number
S160494

CUSTOMER PART NUMBER

SERIAL#G87

SOLD TO: BRENDLELL MANUFACTURING INC

580 NORTH 400 WEST
NORTH SALT LAKE UT 84054

SHIP TO:

BRENDLELL MANUFACTURING INC.

580 NORTH 400 WEST
NORTH SALT LAKE UT 84054

Description: E4130 HR NORM Q&T BAR API 6A PSL3 NACE MR0175

6-1/2 RD X 20' R/L

Line Total: 19.5 FT

HEAT: 418595

ITEM: 505824

GRAIN SIZE :7 -

IMPACT TEST		UOM ft-lbs				%	LAT		
TYPE	TEMP	ORNT	SMPL#1	#2	#3	AVG	SHEAR	EXPEN	DESCRIPTION
CHARPY	-75 F	LONG	33.0	36.0	36.0	35.0			10mm x 10mm

MATERIAL IS FREE FROM MERCURY CONTAMINATION
NO WELD REPAIR PERFORMED ON MATERIAL
THERMAL TREATMENT: OK
NORMALIZED 1652 DEG F X 353'
QUENCHED 1616 DEG F WATER X 353'
TEMPERED 1300 DEG F AIR X 390'
WATER TEMP BEFORE 86 DEG F AFTER 86 DEG F


The above data were transcribed from the manufacturer's Certificate of Test after verification for completeness and specification requirements of the information on the certificate. All test results remain on file subject to examination.

We hereby certify that the material covered by this report will meet the applicable requirements described herein, including any specification forming a part of the description.

The willful recording of false, fictitious, or fraudulent statements in connection with test results may be punishable as a felony under federal statutes.

Material did not come in contact with mercury while in our possession.

DIANA JOHNSON



TECHNICAL MANAGER



MACHINE SPECIALTY & MFG., INC.
215 ROUSSEAU ROAD
YOUNGSVILLE, LA 70592
Phone: 337-837-0020
Fax: 337-837-0062

Material Test Report

Page : 1 of 1

SOLD TO: SPECIALTIES CO./COPPER STATE
RUBBER INC.
14141 S WAYSIDE DRIVE
HOUSTON, TX 77048

SHIP TO: SPECIALTIES CO./COPPER STATE
RUBBER INC.
14141 S WAYSIDE DRIVE
HOUSTON, TX 77048

DATE		SALES ORDER #	CUST P.O.#	TAG NUMBER	ITEM TAG		
11/17/2016		0260385	110816WL				
ITEM #	QTY	ITEM DESCRIPTION			HEAT CODE	HEAT NUMBER	STARTING MATERIAL.
2	8	4 1/16 10M RTJ WN 3 ID 4.5 OD TAPER BORE PSL-3 316SS INLAY SO# 13056-01 THRU -08			V4760	G1207	API 6A 75K 4130

CHEMICAL ANALYSIS

C	Si	Mn	S	P	Cr	Cu	Al	Ni	Mo	V
.32	.22	.51	.011	.013	.98			.065	.17	.008

PHYSICAL PROPERTIES

Yield PSI	Tensile PSI	Elongation	REDUCTION OF AREA %	Hardness Brinell
87898	104257	27.65	70.24	201-233

IMPACT TESTING

TYPE	TEMP	SMPL# 1	# 2	# 3	AVG	%SHEAR	LAT EXP
CHPY-75	- 75F	54 L	58 L	52 L	55	32-31-34	.032-.031-.030

SUPPLEMENTAL INFORMATION

NORMALIZE@1680F FOR 180MIN AUSTENITIZE@1600F FOR 180MIN TEMPER@1260F FOR 240MIN QTC: SACRIFICIAL PIECE CHARPY: 10 X 10 X 55 MELT PRACTICE: EAF-LRF-VD-CCM W/ EMS

WE HEREBY CERTIFY THAT ALL TEST RESULTS CONTAINED HEREIN ARE CORRECT AND TRUE AS CONTAINED IN THE RECORDS OF THE COMPANY. ALL TEMPERATURES ARE IN FAHRENHEIT AND IMPACT TESTING IN FT LBS MANUFACTURED IN USA. EN10204 3.1

Q.A. DEPARTMENT

FLANGE MATERIAL
INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069



Specialties Company
copper state rubber, inc.

6401 McGrew St.
Houston, Texas 77087
713-644-1491
713-644-9830 Fax
csrhouston@msn.com

WELDING PROCEDURE SPECIFICATION, WPS NO: 911171-1
SECTION IX, ASME BOILER 7 PRESSURE VESSEL CODE, 1989 EDITION, 1990 ADDENDA

COMPANY: COPPER STATE RUBBER, INC. SUBSIDIARY OF SPECIALTIES CO.

BY: KEN FORDYCE DATE: 10/07/91 REVISED BY: ROGER PEACE
TECHNICAL MANAGER
COPPER STATE RUBBER

REVISION NO: 5 DATE: 5-31-2005

SUPPORTING PQR(s): 911171-2

REVIEWED REV. 5
Michael D. Miller
24 JUNE 2005

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: P000116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.



SOUTHWESTERN LABORATORIES

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavecade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692-9151

REVIEWED
as indicated by
ABS letter dated:

DEC 20 1995



Welding Procedure Specification, WPS No. 911171-1
Section IX, ASME Boiler & Pressure Vessel Code, 1989 Edition, 1990 Addenda

Company: Copper State Rubber, Inc. subsidiary of Specialties Co.

By Ken Fordyce Date: 10/07/91 Revised By: ROGER PEACE Date: 7-16-93

Supporting PQR(s): 911171-2

REVISION 4
TECHNICAL MANAGER
COPPER STATE RUBBER

WELDING PROCESS(es)

Auto: Semi-auto: GMAW-S Machine: Manual: SAW

JOINTS (QW-402)

Joint Design: The joint may be changed from that shown to any other type (e.g. double-V, single, double-U, single, double-J, etc.) which is consistent with design and application requirements, including those of the construction code; changes in the design (root gap, use of retainers, etc.) beyond that permitted in this WPS must be specified in a new or revised WPS.

Backing: Use backing or backgouging w/SAW.

Backing Type: weld metal or base metal

Retainers: metallic/nonmetallic may be used

BASE METALS (QW-403)

Specification: AISI 4130 API 6A 75K material designation, 207-235 BHN

Groove Thickness Range: 3/16"-8" f/nonimpacts Fillet Thickness Range: all

Pipe Groove Diameter Range: all Pipe Fillet Diameter Range: all

Other Base Metal Thickness Limitations:

- (1) 1.65" maximum for any single weld pass thicker than 1/2."
- (2) 5/8" minimum to 2.5" maximum for impacts

FILLER METALS (QW-404)

AWS Class No.: Only A-No. 11 low hydrogen electrodes (E10018-D2, E10015-D2, & E10016-D2) are qualified for impacts; only ER80S-D2 is qualified for impacts.


Specification: 5.28, GMAW; 5.5, SAW F-No.: 6, GMAW; 4, SAW A-No.: 11

Size: 0.035"-0.045" diameter for GMAW-S; 1/8"-1/4" diameter for SAW

Groove Weld Size/Deposit Range: 0.14" max. for GMAW-S; 2.36" max. for SAW impacts; 7.86" max. for SAW nonimpacts

Fillet Size Range: any

Other: The maximum SAW bead size qualified for impacts is 3/16" thick x 1/2" wide x 6" long. See foot note to Table 1. Solid bare wire must be used for GMAW. Supplementary filler metal or powder not permitted.

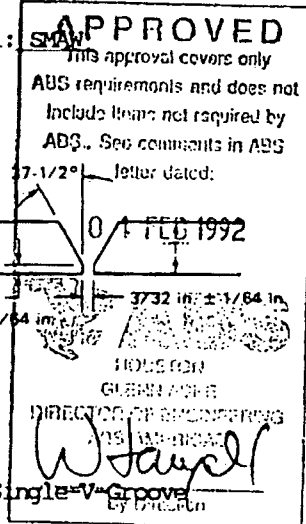

RANGE COM
TO 8" THK FOR
LOW IMPACTS
TO 2.5" FOR
IMPACTS
MDT -30°C
ACCEPTABLE
FOR H₂S
SERVICE
NACE MR0175
ASME IX
DAW (NON)
DETECT

For compliance with
UK DEN OFFSHORE
INSTALLATIONS
(CONSTRUCTION AND SURVEY)
REGULATIONS, 1974"

For compliance with the
applicable parts of the
Norwegian Petroleum
Directorate's "ACTS,
REGULATIONS AND
PROVISIONS FOR THE
PETROLEUM INDUSTRY"

POSITIONS (QW-405)

Groove: flat for impactsFillet: flat for impactsVertical Progression: up or down

WELD & BASE METAL TEMPERATURES (QW-406)

Preheat: 200°F for T to 1"; 300°F over 1"Interpass: 600°F for impactsMaintenance: none

POSTWELD HEAT TREATMENT (QW-407)

Temperature Range: 1200°F-1225°F Time Range: 1 hour per inch of section
or 20°F-30°F below base metal thickness

tempering temperature.

SHIELDING, BACKING, TRAILING GAS (QW-408)

GMAW-S	Gas Type/Mix	Percent Mixture	Flow Rate (cfh)
Shielding:	Argon/CO ₂ *	75% Ar/25%CO ₂ *	30 Minimum
Backing:	none*	none	none
Trailing:	none	none	none

ELECTRICAL CHARACTERISTICS (QW-409)

Current & Polarity: DC reverse (DCEP) Heat Input: See Table 1 note.Voltage: See Table 1. Transfer Mode: short-circuiting for GMAW-S

TECHNIQUE (QW-410)

String or Weave: string only for impacts*Cleaning: wire brush, chip, grind, or other suitable means to remove slag, rust, scale, grease, or other harmful materials from the weld fusion zoneMethod of Back Couging: mechanical or thermal cutting (w/specified preheat)Tube to Work Distance: 1/4"-1/2" Passes per Side: multiple only for impactsElectrodes: single only for impacts Peening: may be used on intermediateGMAW Gas Cup Size: Nos. 3-8 passes to reduce shrinkage stresses

TABLE 1

ESSENTIAL & NONESSENTIAL PROCEDURE VARIABLES

Pass		Filler Metal		Current		Travel	
No.	Process	Class	Dia.	Type	Amps.	Volts	Direction Speed
1	GMAW-S	ER80S-D2	0.035	DCEP	60-130	15-20	Flat 7.0 ipm
Any	SMAW	E10018-D2	1/8	DCEP	110-440	18-25	Flat 7.0 ipm

*NOTE: The maximum bead size that may be deposited for impacts in any pass is 3/16" thick x 1/2" wide x 6" long with 1/8" diameter electrodes.

This WPS was documented to code requirements by Kelli Loidge of S&L as Report No. 911171-1. It gives the values and/or limits of essential, supplementary essential, and nonessential welding variables permitted by Section IX of the ASME Code as a result of successful procedure qualification. The essential and supplementary essential variables may be changed within the limitations of ASME Section IX, QW-250 without regualification. Changes outside those limits require regualification of the altered procedure.

LP Loidge
Reviewed By:

Date: 10/07/91File No.: 12-8075-00



SOUTHWESTERN LABORATORIES

1804

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692-5151

Procedure Qualification Record, PQR No. 911171-2 Section IX, ASME Boiler & Pressure Vessel Code, 1989 Edition, 1990 Addenda

Date: 10/07/91 WPS No. (s): 911171-1

WELDING PROCESS(es)

Auto: Semi-auto: GMAW-S Machine: Manual: SMAW

JOINTS (QW-402)

Single-V-Groove Weld with No Backing
Root Gap = 1/8"
Root Face = 1/16"
Groove Angle = 70° 1st 3/4"
Groove Angle = 33° 2nd 3/4"

Joint Design

BASE METALS (QW-403)

Material Spec.: AISI 4130
Type & Grade: API 75k designation
P-No.: to P-No.:
Thickness of Test Coupon: 1-1/2"
Diameter of Test Coupon: 10" OD
Other: normalized, quenched, tempered
to 228 BHN (Heat No. A2769)

FILLER METALS (QW-404)

Spec Class. F-No. A-No. Dia.
GMAW: 5.28 ER80S-D2 6 11 0.035"
SMAW: 5.5 E10018-D2 4 11 1/8"

POSITION (QW-405)

Position of Joint: 1G Rolled
Progression of Weld See Table 1.

PREHEAT TEMPERATURE (QW-406)

Preheat: 300°F minimum
Interpass: 500°F maximum
Maintenance:

POSTWELD HEAT TREATMENT (QW-407)

Temperature: 1230°F
Time: 2-1/2 hours
Other:

GAS (QW-408)

Shielding Gas: Argon & CO2
Mixture: 75% Ar, 25% CO2
Shielding Flow Rate: 30 cfh
Backing Flow Rate:

ELECTRICAL (QW-409)

Voltage: See Table 1.
Current: See Table 1.
Mode of Transfer: Short Circuiting
Heat Input: See Table 1 note.

TECHNIQUE (QW-410)

String or Weave: String & Weave Machine Oscillation: NA
Passes per Side: multiple Number of Electrodes: NA
Deposit Thickness 1/8" GMAW; 1-3/8" SMAW

TABLE 1

ESSENTIAL & NONESSENTIAL PROCEDURE VARIABLES

Pass		Filler Metal		Current			Travel	
No.	Process	Class	Dia.	Type	Amps.	Volts	Direction	Speed
1	GMAW-S	ER80S-D2	0.035	DCEP	60-130	15-20	Flat	7.0 ipm
2-24	SMAW	E10018-D2	1/8	DCEP	110-140	18-25	Flat	7.0 ipm

NOTE: The maximum volume of weld metal deposited during any single pass was a 3/16" thick x 1/2" wide bead in a 6" length using a 1/8" diameter E10018-D2 electrode.

SOUTHWESTERN LABORATORIES

PQR No.: 911171-2

Page 2 of 3

TENSILE TEST Nos. 57022 & 57103 (QW-150)

Specimen No.	Width or Dia. (in.)	Thickness (in.)	Area (in. ²)	Ultimate Load (lb.)	Stress (psi.)	Ultimate Failure Location
1	0.748	1.296	0.9694	98,710	101,800	Weld Metal
2	0.748	1.378	1.0307	105,700	102,500	Weld Metal

GUIDED BEND TEST Nos. 57022 & 57103 (QW-160)

Type & Figure No.	Result
Four Side Bends per QW-462.2	Satisfactory

TOUGHNESS TEST No. 57103 (QW-170)

Specimen No.	Notch Location	Notch Type	Test Temp (°C)	Impact Values	Lateral Exp Mils	Exp Shear%	Section Size at Notch (mm)
1	Weld	Vee	-15	88	60	75	8 10
2	Weld	Vee	-15	29	39	30	8 10
3	Weld	Vee	-15	32	42	30	8 10
Fusion Line (FL)							
1	FL	Vee	-15	52	37	60	8 10
2	FL	Vee	-15	47	36	60	8 10
3	FL	Vee	-15	56	43	60	8 10
1	FL+2mm	Vee	-15	104	70	75	8 10
2	FL+2mm	Vee	-15	118	74	75	8 10
3	FL+2mm	Vee	-15	102	68	75	8 10
1	FL+5mm	Vee	-15	108	70	75	8 10
2	FL+5mm	Vee	-15	106	68	75	8 10
3	FL+5mm	Vee	-15	105	66	75	8 10

Rockwell Hardness Survey (2mm below Face of Weld)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected				Unaffected		Heat Affected	
No.	HRB	No.	HRB	No.	HRB	No.	HRB	No.	HRB
1.	97.2	2.	98.7	3.	96.6	6.	98.3	7.	96.7
				4.	96.9				
				5.	96.6				

Rockwell Hardness Survey (at midwall)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected		No.	HRB	Unaffected		Heat Affected	
No.	HRB	No.	HRB			No.	HRB	No.	HRB
8.	93.6	9.	93.5	10.	92.9	12.	95.8	13.	98.3
				11.	97.7				

Rockwell Hardness Survey (2mm below root of weld)

Left Base Metal Zones				Weld		Right Base Metal Zones			
Unaffected		Heat Affected		No.	HRB	Unaffected		Heat Affected	
No.	HRB	No.	HRB			No.	HRB	No.	HRB
14.	95.6	15.	99.9	16.	96.4	17.	97.9	18.	99.9

This PQR was documented to code requirements by Kay Jorde of SwL as Report No. 911171-2 from the welding variables recorded by Copper State Rubber, Inc. during the welding of the test coupons and the results of tensile, guided-bend, hardness, and charpy impact tests performed by SwL.

LP Roster

Reviewed By:

Date: 10/07/91

Client No.: 12-8075-00

Welder: Randy Wiseman ID/Stamp No.: 234-48-95

We, the undersigned, certify that the statements in this record are correct and that the test welds were prepared and tested in accordance with code requirements.

Signed: Copper State Rubber, Inc.

Date: OCT 8, 1991

By: ROGER D. PEACE

ROGER D. PEACE

SwL**SOUTHWESTERN LABORATORIES****SWL**

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692 9251

Welder Qualification Test Record, WQTR No. 930635-1

Section IX, ASME Boiler & Pressure Vessel Code, 1992 Edition

Using WPS No. 911171-1 Rev. 1, Welder Jay B. Williams, ID No. 453-06-6487, qualified for the following ranges.


Test Variables	Test Values	Qualification Range
PROCESS:	GMAW-S	GMAW-S Only
BACKING:	Without	With or Without
MATERIAL SPECIFICATION:	Quenched & Tempered AISI 4130 to API 6A TP 75K	P-No. 1 through P-No. 11, P-No. 4X and unassigned metals of similar chemical composition
DEPOSIT THICKNESS:		
GROOVE:	1/8"	9/64" Maximum
FILLET:	Not Applicable	Any
DIAMETER:		
GROOVE:	4-1/2" OD	2-7/8" OD & Over
FILLET:	Not Applicable	Any
FILLER METAL:		
SPECIFICATION:	SFA-5.28	
CLASSIFICATION:	AWS ER80S-D2	
P-NO.	6	6, or any bare wire conforming to an analysis listed in QW-442
POSITION:	1G	Flat Only
VERTICAL WELDING DIRECTION:	Not Applicable	—
BACKING GAS:	Without	With or Without

Examination & Test Results

GUIDED-BEND TEST NO. 60596 PER QW-160:	RESULT:
Two Side Bends per QW-462.2	Satisfactory

NOTE:	The Guided-bend tests were witnessed by Glen R. Lauritsen, Principal surveyor, ABS AMERICA, a division of The AMERICAN BUREAU of SHIPPING.
-------	--

This WQTR was documented to Code requirements by Kay Jordey of SwL as Report No. 930635-1 from the welding variables recorded by Copper State Rubber, Inc., Specialties Co. during the welding of the test coupon and the results of guided-bend tests performed by SwL.


REVIEWED BY

DATE:	May 12, 1993	FILE NO.:	12-8075-00
-------	--------------	-----------	------------

SwL**SOUTHWESTERN LABORATORIES****SWL**

Materials, environmental and geotechnical engineering, nondestructive, metallurgical and analytical services
222 Cavalcade St. • P.O. Box 8768, Houston, Texas 77249 • 713/692 9251

Welder Qualification Test Record, WQTR No. 930635-2

Section IX, ASME Boiler & Pressure Vessel Code, 1992 Edition

Using WPS No. 911171-1 Rev. 1, Welder Jay B. Williams, ID No. 453-06-6487, qualified for the following ranges.


Test Variables	Test Values	Qualification Range
PROCESS:	SMAW	SMAW Only
BACKING:	With	With Only
MATERIAL SPECIFICATION:	Quenched & Tempered AISI 4130 to API 6A TP 75K	P-No. 1 through P-No. 11, P-No. 4X and unassigned metals of similar chemical composition
DEPOSIT THICKNESS:		
GROOVE	5/8"	1-1/4" Maximum
FILLET	Not Applicable	Any
DIAMETER:		
GROOVE	4-1/2" OD	2-7/8" OD & Over
FILLET	Not Applicable	Any
FILLER METAL:		
SPECIFICATION	SFA-5.5	
CLASSIFICATION	AWS E10018-D2	
F-NO.	4	1, 2, 3, & 4
POSITION:	1G	Flat Only
VERTICAL WELDING DIRECTION:	Not Applicable	
BACKING GAS:	Not Applicable	

Examination & Test Results

GUIDED-BEND TEST NO. 60596 PER QW-160:	RESULT:
Two Side Bends per QW-462.2	Satisfactory

NOTE:	The Guided-bend tests were witnessed by Glen R. Lauritsen, Principal surveyor, ABS AMERICA, a division of The AMERICAN BUREAU of SHIPPING.
-------	--

This WQTR was documented to Code requirements by Ken Jordy of SwL as Report No. 930635-2 from the welding variables recorded by Copper State Rubber, Inc., Specialties Co. during the welding of the test coupon and the results of guided-bend tests performed by SwL.

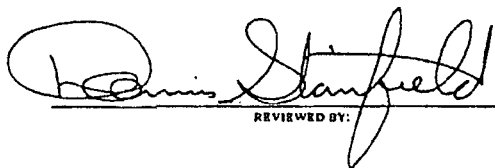
REVIEWED BY:

DATE:	May 12, 1993	FILE NO.:	12-8075-00
-------	--------------	-----------	------------

American Bureau of Shipping

TWO WORLD TRADE CENTER, 106TH FLOOR
NEW YORK, NEW YORK 10048

93-HS57593

1

6 May 1993

WELDER QUALIFICATION TEST

Jay Williams

Welder's Name:

S.S. No:453-06-6487

Identification

QUALIFICATION TESTS:

SPECIFICATION - ASME CODE, SECTION IX, Boiler & Pressure
vessel code, 1989 Ed, 1990 ad.

WELDING PROCESS - Semi-Auto: GMAW-S - Manual: SMAW

JOINT TYPE - Single-V-Groove Weld with no backing

BASE MATERIAL TYPE - AISI 4130, API 75k designation

BASE MATERIAL THICKNESS/SIZE - 1-1/2" thick

FILLER METAL TYPE - GMAW Spcc 5.28 ER805-D2

SMAW Spcc 5.5 E10018-D2

FILLER METAL "F" - NO. F-6, F-4

TEST POSITION - 1G Rolled

GUIDED BEND TEST RESULTS:

Specimen No.	Type	Results
S-1	Side	Satisfactory
S-2	Side	Satisfactory

POSITION AND TYPE WELD QUALIFIED:

MATERIAL GROUP: API 75k designation

FILLER METAL GROUP: GMAW 5.28 Spec ER805-D2

SMAW 5.5 Spec E10018-D2

	MATERIAL	THICKNESS/SIZE	POSITION
GROOVE WELD:	PLATE & PIPE	MAX TO BE WELDED	FLAT
FILLET WELD	PLATE & PIPE PLATE & PIPE	ALL ALL	FLAT FLAT

R.G. Carver
R.G. Carver, Surveyor

G.R. Lauritsen (p.w.)
G.R. Lauritsen, Surveyor

NOTE: This Report evidences that the survey reported herein was carried out in compliance with one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping and is issued solely for the use of the Bureau, its committees, its clients or other authorized entities. This Report is a representation only that the vessel, structure, item of material, equipment, machinery or any other item covered by this Report has been examined for compliance with, or has met one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping. The validity, applicability and interpretation of this Report is governed by the Rules and standards of American Bureau of Shipping who shall remain the sole judge thereof. Nothing contained in this Report or in any notation made in contemplation of this Report shall be deemed to relieve any designer, builder, owner, manufacturer, seller, supplier, repairer, operator or other entity of any warranty express or implied.

American Bureau of Shipping



STATEMENT OF FACT

CERTIFICATE No.

93-HS57593

PORT OF

Houston, Texas

DATE 6 May 1993

This is to Certify that the undersigned Surveyor to this Bureau, did, at the request of Copper State Rubber/Specialties of Houston, Texas on the 28th day of April 1993 and in order to witness and report on Welder Qualification Test. For further particulars, see report as follows:

1. The following welder was tested in accordance with Section IX of ASME Boiler and Pressure Vessel Code and the American Welding Society Structural Welding Code. Weld Specimens were physically tested, examined and found satisfactory.

Jay Williams S.S. NO. 453-06-6487

2. For particulars on tests performed, material, electrodes and positions qualified for, see attached sheet.


R.G. Carver, Surveyor


G.R. Lauritsen, Surveyor

This Certificate evidences compliance with one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping and is issued solely for the use of the Bureau, its committees, its clients or other authorized entities. This Certificate is a representation only that the vessel, equipment, structure, item of material, machinery or any other item covered by this Certificate has met one or more of the Rules, guides, standards or other criteria of American Bureau of Shipping. The validity, applicability and interpretation of this Certificate is governed by the Rules and standards of American Bureau of Shipping who shall remain the sole judge thereof. Nothing contained in this Certificate or in any Report issued in contemplation of this Certificate shall be deemed to relieve any designer, builder, owner, manufacturer, seller, supplier, repairer, operator or other entity of any warranty express or implied.

Report No.: 930949
 Date: July 16, 1993
 Client No.: 12-8075-00
 Page No.: 1 of 2

For compliance with
 UK DEN "OFFSHORE
 INSTALLATIONS
 (CONSTRUCTION AND SURVEY)
 REGULATIONS, 1974"



SOUTHWESTERN LABORATORIES, INC.

222 Cavalcade
 P.O. Box 8768
 Houston, Texas 77249
 Phone: (713) 692-9151
 Fax: (713) 696-6307

Copper State Rubber, Inc.
 P.O. Box 266084
 Houston, TX 77207

Attention: Mr. Roger Peace

REVIEWED
 as indicated in
 ABS Letter dated:

 DEC 20 1995

For compliance with the
 applicable parts of the
 Norwegian Petroleum
 Directorate's "ACTS,
 REGULATIONS AND
 PROVISIONS FOR THE
 PETROLEUM INDUSTRY"

Projects: Charpy Impact Testing of a Procedure Qualification Test Weld

PROJECT INFORMATION

WELDING PROCEDURE:	Previously qualified WPS No. 911171-1 (supported by PQR No. 911171-2)
WELDMENT AS-RECEIVED:	AISI 4130, as-welded condition
IDENTIFICATION:	Heat No. A2769
SPECIFICATIONS:	ABS, Guide for the Certification of Drilling Systems, 1990

Post Weld Heat Treatment

SPECIFICATION:	PQR No. 911171-2
TIME:	2 hours at temperature
TEMPERATURE:	1200° F-1210° F
HEATING RATE:	212° F per hour from 700° F
COOLING RATE:	318° F per hour to 700° F

HEAT TREATMENT:	No. 60973	HEAT TREATMENT DATE:	July 12, 1993
-----------------	-----------	----------------------	---------------

Charpy Impact Test Results

SPECIFICATIONS:	0.015" lateral expansion	TEST TEMPERATURE:	Minus 30° C
LINEAR HAMMER VELOCITY:			16.8 feet per second
EFFECTIVE ENERGY:	264 foot pound force	TECHNICIAN:	M. Petersen
SPECIMEN TYPE & SIZE:	ASTM A 370, E 23, Type A; 10 mm x 10 mm		
LOCATION & ORIENTATION:	Weld metal, HAZ, and base metal, 2mm and 5mm from the fusion line, 1/16" below the surface and transverse to the weld axis		
TEST EQUIPMENT:	Tinius Olsen Serial No. 103222	TEST PROCEDURE:	ASTM A 370, E 23
TEST NO.:	60988	TEST DATE:	July 14, 1993

SPECIMEN IDENTIFICATION	WIDTH, INCHES	EFFECTIVE THICKNESS, INCHES	IMPACT ENERGY, FT- LBF	LATERAL EXPANSION, MILS	PERCENT DUCTILE FRACTURE
930949-1-1 (WELD)	0.394	0.316	60	40	25
930949-1-2 (WELD)	0.394	0.316	59	40	25
930949-1-3 (WELD)	0.394	0.316	62	42	25

930949-2-1 (HAZ)	0.394	0.316	49	32	25
930949-2-2 (HAZ)	0.394	0.316	101	60	50
930949-2-3 (HAZ)	0.394	0.316	40	22	25

SOUTHWESTERN LABORATORIES

REPORT NO. : 930949

Page 2 of 2

COPPER STATE RUBBER COMPANY

SPECIMEN IDENTIFICATION	WIDTH, INCHES	EFFECTIVE THICKNESS, INCHES	IMPACT ENERGY, FT.- LBF	LATERAL EXPANSION, MILS	PERCENT DUCTILE FRACTURE
930949-3-1 (2 MM)	0.394	0.315	76	50	60
930949-3-2 (2 MM)	0.394	0.315	71	47	60
930949-3-3 (2 MM)	0.394	0.315	114	69	90

930949-4-1 (5 MM)	0.394	0.315	80	47	70
930949-4-2 (5 MM)	0.394	0.315	82	51	70
930949-4-3 (5 MM)	0.394	0.315	75	45	70

COMPLIANCE:	<i>The impact test results met the specification.</i>
-------------	---


KF/KJ Reviewed By:


Prepared By:

**DNV**

Det norske Veritas Industry, Inc.
16340 Park Ten Place, Suite 100
Houston, Texas 77084
Tel: (713) 579-9003
Facsimile: (713) 579-1360

Det Norske Veritas Industry, Inc.
Form No: QAS-51-007.00

INSPECTION REPORT

Page 1 of 1

QAS Project Number: 51-05428-63	QAS Report Number: 51-05428-63-1
P.O. Number: 2322RP	Inspection Date: February 18, 1994
Main Vendor: Copper State Rubber	Insp. Location: Houston, Texas
Sub Vendor: N/A	Vendor Contact: Roger Peace
Vendor Ref: wps 911171-1	Vendor Phone: 713 644 1491
Req. No: N/A	Quantity: N/A
Part No: N/A	Serial No: N/A
EQUIPMENT DESCRIPTION: Weld Procedure Review	

Inspection Comments:

Purpose of Inspection: Review Weld Procedure.

Acceptance Criteria: ASME IX
NACE MR-0175
DNV Rules Drill(N), MOU

Reference Documents: None

Scope of Activity:

DNV reviewed the above Weld Procedure and found it to be in compliance with the above referenced standards with comments (see front page of WPS for comments).

FAX: Yes**Date:** 02/18/94**Signature:** Harold Melton**Distribution:**

Original to Client: Copper State Rubber
Copy to File: 51-05428-63 (D-217)

Attn:

Roger Peace

FAX #:

713 644 9830



February 18, 1994

Copper State Rubber
Attn: Roger Peace
6401 McGrew Street
Houston, Texas 77087

Reference: WPS No: 911171-1 Rev. 4

DNV Reference: 51-05428-63

Dear Mr. Peace

Please find enclosed one copy of the referenced weld procedures for your review and action as noted below:


- Reviewed with comments - for your records (For comments - see front page of W.P.S.)

The referenced weld procedure was reviewed against the following standards (latest revision):

<input checked="" type="checkbox"/> ASME IX	<input type="checkbox"/> DNV Tech. Note B-108
<input type="checkbox"/> AWS D1.1	<input type="checkbox"/> DNV Rules - Lifting Appliances
<input type="checkbox"/> API 6A	<input type="checkbox"/> DNV Rules - Submarine Pipelines
<input checked="" type="checkbox"/> NACE MR-01-75	<input checked="" type="checkbox"/> DNV Rules - Drill(N) for Mobile Offshore Units

If you should have questions or comments regarding this review, please do not hesitate to contact us and discuss it.

Regards,


Harold Melton
Q.A. Specialist

Procedure # RT-3

Radiographic Specialists, Inc.

4110 Mohawk Houston, Tx 77093

Phone: 281-449-1634

Fax: 281-449-1640

IP-Inadequate Penetration
IF-Inadequate Fusion
ETA-Burn Through Area
SL-Slag Line
SI-Slag Inclusion
P-Porosity
GP-Gas Pocket

C-Crack
IU-Internal Undercut
OU-Outside Undercut
LC-Low Crown

Page: 1 OF: 1
Date: 5-17-83
SIO: CSK 48608-2A 12-B
PIO: 3051 RF
Spec/Heat/Other: ASME SEC VIII DIV 1 UWS7

Customer: CYPER STATE RUBBER Job Location: RST

#	Seam #	Film #	Matl Dia.	Thk	Acc Y N	Remarks	#	Seam #	Film #	Matl Dia.	Thk	Acc Y N	Remarks
1		1-2	48608-2A	1			23						
2		2-3		1			24						
3		3-4		1			25						
4		4-5		1			26						
5							27						
6							28						
7							29						
8							30						
9							31						
10							32						
11							33						
12							34						
13							35						
14							36						
15							37						
16							38						
17							39						
18							40						
19							41						
20							42						
21							43						
22							44						

Single Or Double Wall: DLW Material: C/S Thickness: 3/4"
Single Or Double Viewing: SV Penetrameter: 20F Screen: 1005
Mapping Loc. When App.: 900 No. Of Exp: 4 Film Brand: AGFA
Min. Source To Film Distance: 60 ft. Focal Spot Size: 146 Designation: D4
Isotopes Used: Td122
Depart Shop: _____ Arrive Job: _____ Depart Job: _____ Arrive Shop: _____

Film Total: 4 Stand-By: _____ No Of Film Per Cassette: _____
Technician: W. M. Bled Level: III Customer: Ken 507-0

The results reported represent opinions only and are not to be considered as warranties or guarantees of quality, classification, or usability of material examined. We shall assume no further responsibility for radiographs following the acceptance by the customer's field representative upon signing of field report. In no event shall the liability of Radiographic Specialists, Inc., as to any items inspected or tested (including any liability as to selection and/or results of such test) exceed the charge of Radiographic Specialists, Inc. for the inspection of such items.

RADIOGRAPHIC SPECIALISTS, INC.

4110 MOHAWK
HOUSTON TX 77093

PHONE (281) 449-1634
PAX (281) 449-1640

RESULTS OF TEST ON STEEL SPECIMENS

TO: COPPER STATES RUBBER/SPECIALTIES COMPANY

DATE: 05-31-05

LAB TEST NO: 05-31-9036

MATERIAL:

CUSTOMER JOB NO:

SPEC. IDENTIFICATION: 5" PIPE PQR TEST TONY ADAMS

Other Test

CHARPY IMPACT -30 DEG F

WELD METAL	HAZ.
55 FT LBS 30% SHEAR .048 LAT EXP	125 FT LBS 60 % SHEAR .091 LAT EXP
60 FT LBS 30% SHEAR .062 LAT EXP	120 FT LBS 60% SHEAR .085 LAT EXP
55 FT LBS 30% SHEAR .048 LAT EXP	125 FT LBS 60 % SHEAR .091 LAT EXP

WITNESS BY: _____ RADIOGRAPHIC SPECICALISTS, INC.

COPIES: _____

BY: TIM BRADLEY III



8902 N. MAIN
HOUSTON, TX 770220
Ph: 713-692-3410 Fax: 713-692-3910

Printed: 05/18/2005 0:00:20AM
Page 1 of 1

Certification

Order Number

35022

Customer: 00000074
SPECIALTIES COMPANY
6401 MC GREW
HOUSTON, TX 77087

Shipped To:
WILL CALL
6401 MC GREW
HOUSTON, TX 77087


Customer Purchase Order No.	Customer Shipper No.	Material Type	Mat'l Heat Code	Lot Number					
48619		ANY							
Process: STRESS RELIEVE									
<u>PROCESSING SPECIFICATIONS</u>									
Requirement	Specified	Qty Tested	Test Results						
Line#	Quantity	Weight	Part Number/Description						
1	1	21.0	6" OD X 4-1/4" ID X 13" LENGTH						
2			WELD TEST COUPON						
3			ID NOS:CSR-48608-1-A & 48608-2-B						
Revision									
Operation	Spec Temp Range	Specified Soak Time	Furnace# Load#	Atmos/Dpt CarbPot	Q-Media Q-Temp	Start Date	Time In	Time Out	Date Complete
STRESS	1200	1:00	3			05/18/2005	2:45	6:30	05/18/2005

COMMENTS

 JAMES MUSGROVE	<u>5/18/05</u> Date Signed
---	-------------------------------

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

REVIEW OF REPUBLIC
WORK ORDER ☐ TESTS ☒
TO CUSTOMER REQUIREMENTS
DATE 5/18/05 BY P

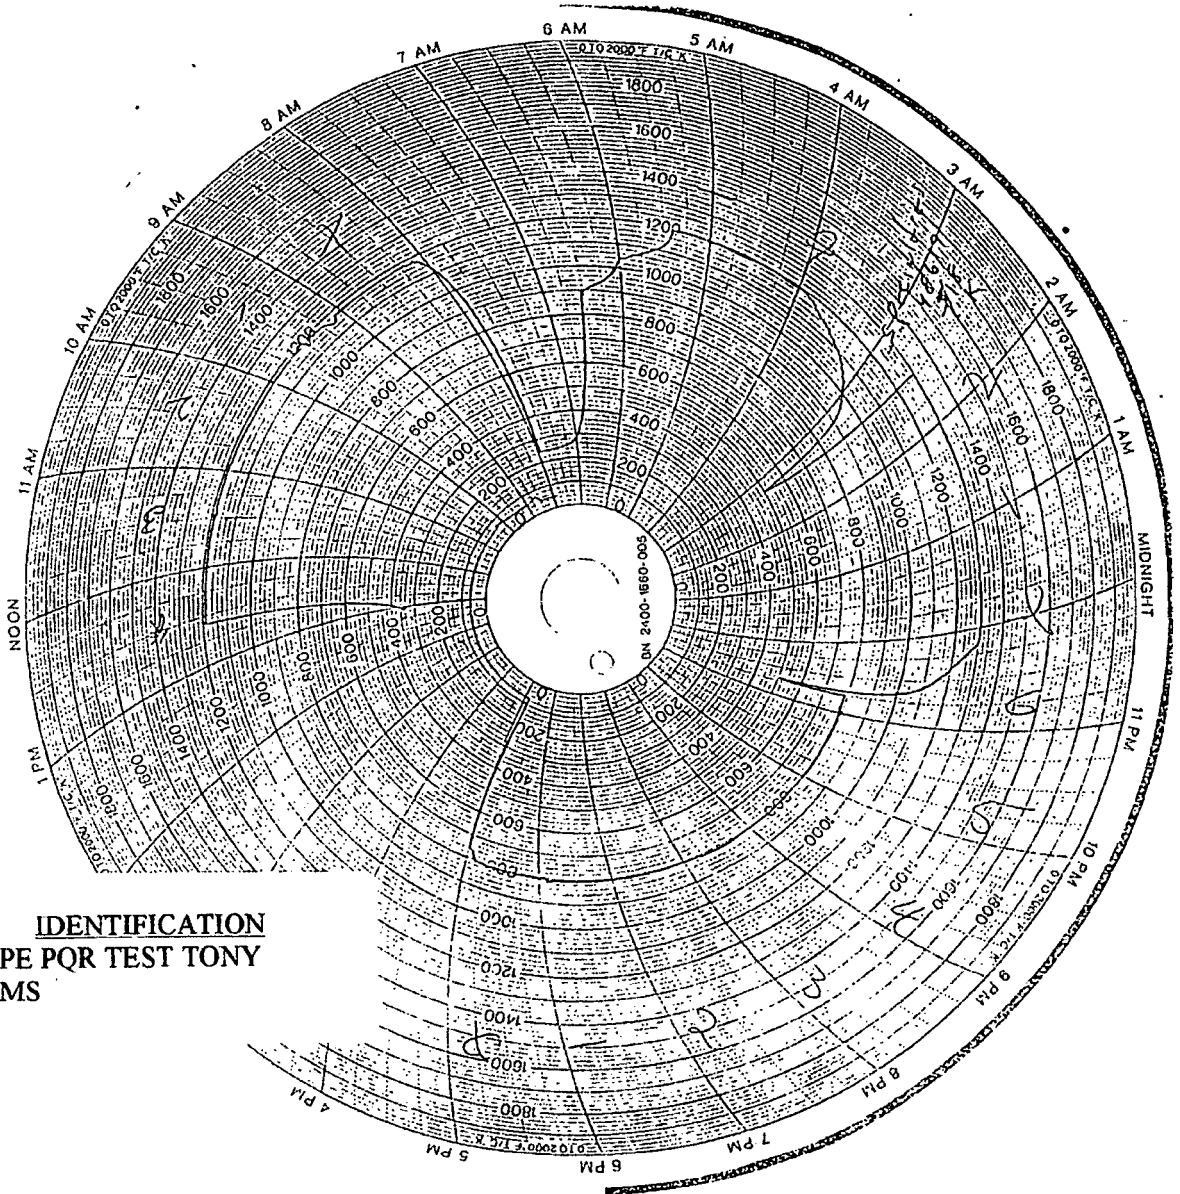

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

REVERED HEAT TREAT. INC.
 Houston, Texas

City Springfield, Co. 67
 Description 6" OD X 4 1/2" ID X 12" Length
 M. Q. 48619 SO
 Furnace #3 Serial No.
 Date 5-18-05 Heat No.
 Temperature 1200° Time 1 hr

Weld Test Coupon
 ID Nos: CSR-48608-1-A +
 48608-2-0.



LTV COPPERWELD
MECHANICAL GROUP SHELBY
SHELBY, OHIO 44875-1471
Telephone 419/342-1200 FAX: 419/342-1437

MATERIAL TEST REPORT

QS9000/ISO 9002 CERTIFIED

FAXED

SHELBY ORDER NO
140562

C U S T O M E R	TUBULAR STEEL INC 1031 EXECUTIVE PARKWAY DRIVE ST LOUIS MO 63141		SPECIFICATION ASTM A519 96	CUSTOMER ORDER 4538
	GRADE 4130		SIZE/O.D. x I.D. x WALL 6.000 X 4.000 X 1.000	QUANTITY 2214 LB
SHIPPED 02/15/01		DATE 02/15/01		

CONDITION	PART NO.	S# 00099194
SMLS HF HEAT TREATED QUENCH & TEMPER ELECTRIC PUR		50043089

HEAT NO.	CHEMICAL ANALYSIS												GRAIN SIZE
	C	Mn	P	S	Si	Ni	Cr	Mu	Cu	V	Al	OTHER	
14086	.31	.52	.009	.018	.230	.110	.960	.180	.120	.004	.022	CA .0002	6-8

MECHANICAL PROPERTIES										MAGNAFLUX	
HEAT NO.	LOAD NO.	YIELD PSI	TENSILE PSI	ELONG %	RED AREA %	HARDNESS		IMPACT		FREQ.	SEVERITY
14086	T2692147	84100	103800	2.0"	68	RC 19		SIZE 10.0X10.0			
				28				TEMP F			
								-50			
								RESULTS			
								112			
								77			
								115			

JOMINY HARDENABILITY (EXPRESSED IN 16THS)															
HEAT NO.	1	2	3	4	5	6	7	8	10	12	14	16	20	24	28
14086	51	50	49	47	42	39	36	33	31	29	29	28	25	26	24

J-K RATING				SLAG-OXIDE RATING			
HEAT NO.	A	B	C	D	INCOT	OXIDE	SLAG

IDENTIFICATION
5" PIPE PQR TEST TONY
ADAMS

MELT SOURCE	ESG	THIS TEST REPORT NOTARIZED WHEN REQUIRED
OTHER INSPECTION	MACRO ETCH: S2 R1 C2	SWORN AND SUBSCRIBED BEFORE ME
NON DESTRUCTIVE TESTED		THIS DAY OF
Non-Destructive Tested		
NACE STD, MRO175, REV-1993 PARAGRAPH 3.		

NOTARY PUBLIC

Brian M. Clark
Brian M. Clark, Chief Metallurgist

MATERIAL FURNISHED TO THE CUSTOMER UNDER THE ABOVE, NO ADDITIONAL SPECIFICATION IS IMPLIED OR WARRANTED. THIS TEST REPORT SHALL NOT BE ALTERED OR REPRODUCED EXCEPT BY THE



Specialties Company
copper state rubber, inc.

6401 McGrew St.
Houston, Texas 77087
713-644-1491
713-644-9830 Fax
csrhouston@msn.com

ADDENDUM

WELDING PROCEDURE SPECIFICATION, WPS NO.: 911171-1
PROCEDURE QUALIFICATION RECORD, PQR NO.: 911171-2

COMPANY: COPPER STATE RUBBER, INC./SUBSIDIARY OF SPECIALTIES
COMPANY

- REVISION 1: DATE 1-31-92 – CORRECT TYPOGRAPHIC ERROR
 STRINGER PASS, AMPERES AND VOLTS
- REVISION 2: DATE 5-12-93 – JAY B. WILLIAMS I.D. NO.: 453-06-6487
 QUALIFIED TO THIS WPS; WQTR NOS.: 930635-1 AND
 930635-2
- REVISION 3: DATE 6-14-93 – CORRECT TYPOGRAPHIC ERROR SMAW
 PROCESS, AMPERES AND VOLTS
- REVISION 4: DATE 7-16-93 – WPS QUALIFIED FOR CHARPY IMPACTS
 AT -30°C; SwL REPORT NO.: 930949
- REVISION 5: DATE 5-31-2005 – CHANGE STRESS RELIEVE TIME FROM
 2 HOURS TO 1 HOUR

REVIEWED REV. 5
Michael G. Miller
24 JUNE 2005



CERTIFICATION

Specialties Company
14141 S. WAYSIDE DR.
Houston, TX 77048 USA

Certification ID: 38120-1
Date: 11/21/2017
Cert Date: 11/21/2017
Purchase Order: 7494
Material: ANY

Page 1 of 1

We are pleased to provide you with the following Certification.

Part Number	Part Description	Qty	Weight
NONE	3"CK W/4-1/16 10M FLANGE, S/N: H1263-H1266	4	820.00
NONE	4"CK W/4-1/16 10K HUBS, S/N: 80868-1,2	2	0.00

Customer Requirements						
Inspection Type	U Of M	Lower Spec	Lower Control	Target Value	Upper Control	Upper Spec


Results			
Inspection Type	Scale	Minimum	Maximum

Operation


STRESS RELIEVE 1200 FOR 1HR

Certification Statement

THIS MATERIAL HAS BEEN STRESSED PER CUSTOMER REQUIREMENTS

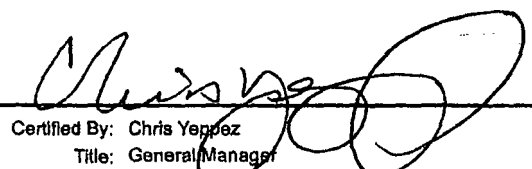
Certified By: Chris Yegorov
Title: General Manager
Date: 11/21/2017

All work is accepted subject to the following conditions (adapted by the Metal Treating Institute): It is generally recognized that even after all science known to us and capable men with years of training, there remain hazards in heat treating. Therefore, our liability to our customers shall not exceed twice the amount of our charges for the work done on any materials, (first I reimburse for the charges and second to compensate in the amount of the charges), except by written agreement. Warranty will be assumed only when made in writing and signed by both you and us. In such event, a higher charge will be made for our services. No claims for shortages in weight or amount will be entertained unless presented within five (5) working days after receipt of materials by customer. No claims will be allowed for shrinkage, expansion, deformity, or rupture in treating or straightening except by written agreement, as above, nor in any case for rupture caused by subsequent grinding. Whenever we are given material with detailed instructions as to treatment, our responsibility shall end with the carrying out of those instructions. Failure by a customer to indicate plainly and correctly the kind of materials, (Make, Brand, and Grade of Steel), to be treated, shall cause an extra charge to be made to cover any additional expense incurred as a result thereof. It shall be the duty of the customer to inspect the merchandise immediately upon return, and in any event claims must be reported prior to the time that any further processing, assembling or any other work has been done on said material. We will accept no responsibility for Gas Nitrided surface hardness, case depth, or dimensional change on material which has not been pretreated to a Martensitic Microstructure with a base hardness of 25-34 RC. Nitride absorption and surface hardness are directly correlated to the precondition of the material to be Gas Nitrided. No agent or representative is authorized to alter these rules and conditions, except in writing duly approved by us.

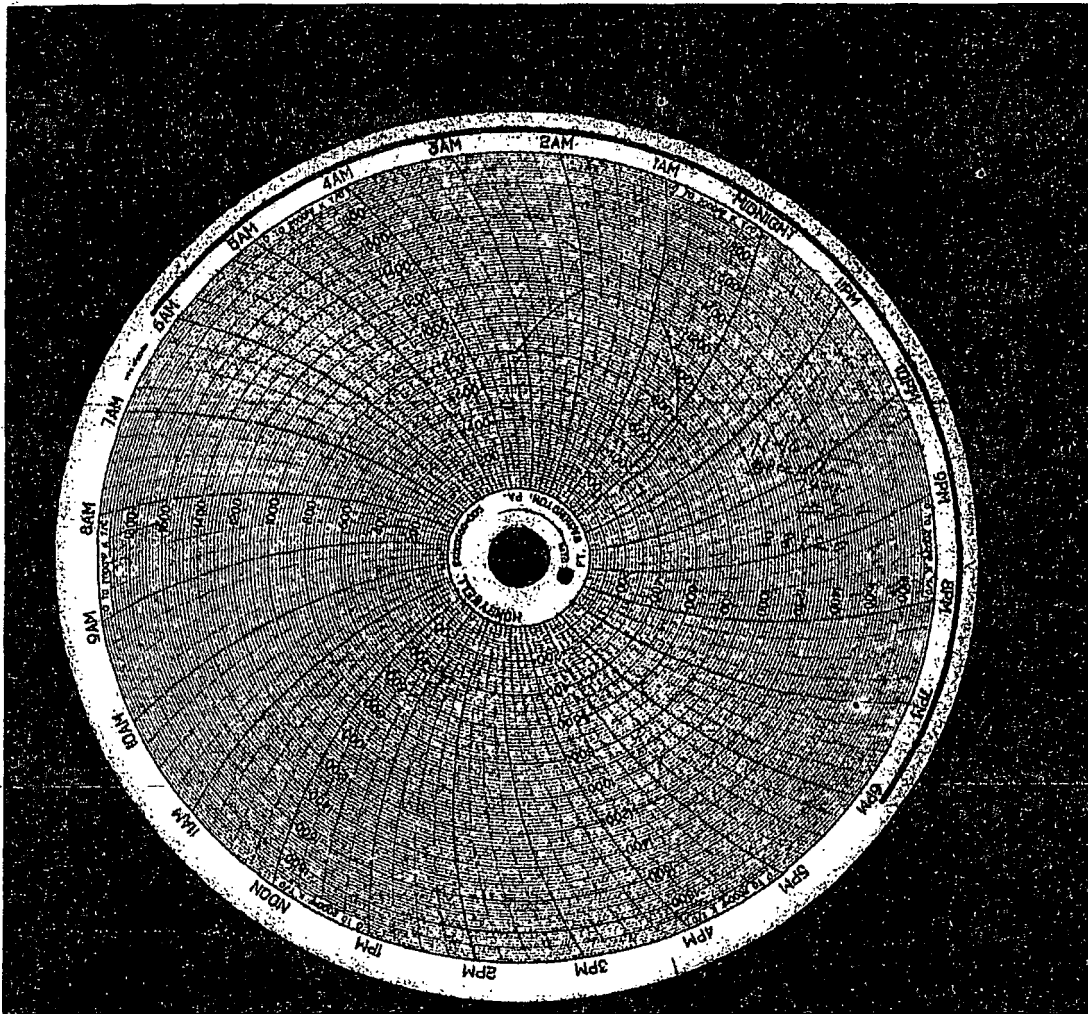

Part Number	Part Description	Quantity	Wt. Each	Wt. Extended
NONE	3"CK W/4-1/16 10M FLANGE	4	205.00	820.00
S/N: H1263-H1266				
NONE	4"CK W/4-1/16 10K HUBS	2	0.00	0.00
S/N: 80868-1,2				
JESSE HAWKINS MECHANICAL				
Customer	SPECIALTIES COMPANY			
Drawn by	SEE ABOVE			
PO	7494	Est. No.	38120	
Quantity	3	Part No.	SEE ABOVE	
Date	11/16/17	Customer's name	SEE ABOVE	
Process	S/R	Temp.	1200F	1 HRS

Procedure # RT-3

Radiographic Specialists, Inc.

4110 Mohawk Houston, Tx 77093

Phone: 281-449-1634

Fax: 281-449-1640

IP-Inadequate Penetration
IF-Inadequate Fusion
BTA-Burn Through Area
SL-Slag Line
SI-Slag Inclusion
P-Porosity
GP-Gas Pocket

C-Crack
IU-Internal Undercut
OU-Outside Undercut
LC-Low Crown

Page: _____ Of: _____

Date: 11/20/17

S/O: _____

P/O: 7815

Spec/Heat/Other: ASME SEC VIII SEC. VIII DIV.1 UW 51

Customer: COPPER STATE RUBBER

Job Location: R.S.I.

#	Seam #	Film #	Matl Dia.	Thk	Acc y N	Remarks	#	Seam #	Film #	Matl Dia.	Thk	Acc y N	Remarks
1	H1263	1 2	3"	7/8"	X		23						
2		2 3			X		24						
3		3 4			X		25						
4		4 1			X		26						
5	H1264	1 2			X		27						
6		2 3			X		28						
7		3 4			X		29						
8		4 1			X		30						
9	H1265	1 2			X		31						
10		2 3			X		32						
11		3 4			X		33						
12		4 1			X		34						
13	H1266	1 2			X		35						
14		2 3			X		36						
15		3 4			X		37						
16		4 1			X		38						
17							39						
18							40						
19							41						
20							42						
21							43						
22							44						

Single Or Double Wall: D.W.

Material: C/S

Thickness: 7/8"

Single Or Double Viewing: S.V.

Penetrameter: B PACK

Screen: .005

Mapping Loc. When App.: 90 DEG.

No. Of Exp: 16

Film Brand: AGFA

Min. Source To Film Distance: CONT.

Focal Spot Size: .146

Min. Film to Obj. Distance: Contact

Isotope Used: IR192

Designation: D5

Depart Shop: _____

Arrive Job: _____

Depart Job: _____

Arrive Shop: _____

Film Total: 16

Stand-By: _____

No Of Film Per Cassette: 1

Technician: TIM BRADLEY

Level: III

Customer: _____

The results reported represent opinions only and are not to be considered as warranties or guarantees of quality, classification, or usability of material examined. We shall assume not further responsibility for radiographs following the acceptance by the customer's field representative upon signing of field report. In no event shall the liability of Radiographic Specialists, Inc., as to any items inspected or tested (including any liability as to selection and/or results of such test) exceed the charge of Radiographic Specialists, Inc. for the inspection of such items.

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

RADIOGRAPHIC SPECIALISTS, INC.

4110 MOHAWK
HOUSTON TX 77093

Ph. 281-449-1634

Fax 281-449-1640

TO: COPPER STATES

DATE: 11/20/17

P. O. NO. 7815

JOB NO.

DEL SLIP

LOCATION: R.S.I.

MAGNETIC PARTICLE INSPECTION REPORT

[illegible]

Materials Used 1 CAN 850A

APPLICABLE SPECIFICATIONSE709

ACCEPTANCE STANDARD ASME SEC VIII APP6 PAR6.4

SCOPE OF EXAMINATION 100% OF WELDED AREA

PROCEDURE NO. MT-5 Rev. 14

METHOD: WET^X_____DRY

INSTRUMENT USED CONTOUR PROBE

MODEL: DA100 S/N. 7178

AMPERES: 10 #LIFT 6.5 AMP.

CURRENT: ACX_____DC_____

FLUORESCENT

BLACK LIGHT:

CALIBRATION:

LIGHT METER:

PREPARED BATH

TYPE: 850Å

BATCH NO: 19685

TECHNICIAN TIM BRADLEY

LEVEL III

WITNESSED BY

CUSTOMER

TIME LEFT RSI:

TIME ARRIVED RSI:

Radiographic Specialists, Inc

(281)449-1634

4110 Mohawk Houston, Texas 77093

Fax (281)449-1640

To: COPPER STATE RUBBER

Date: 11-20-17

P.O.: 7815

Job No.: _____

Location: R.S.I.

BRINELL HARDNESS

[illegible]

API 16C

TECHNICIAN: TIM BRADLEY

CUSTOMER: III



14141 S. Wayside Drive
Houston, Texas 77048

Phone 713-644-1491
Fax 713-644-9830
www.copperstaterubber.com
sales@copperstaterubber.com

FIELD TEST PROCEDURES FOR USED COPPER STATE RUBBER CHOKE/KILL AND SUPER CHOKE/KILL HOSE

VISUAL INSPECTION ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR

1. ARRANGE HOSE SO THAT IT CAN BE OBSERVED FROM ALL ANGLES.
2. CONDUCT THE EXAMINATION FOR EXTERNAL DAMAGE TO THE COVER, END STRUCTURE, AND TERMINATING CONNECTORS.
3. IF THE COVER HAS GOUGING OR TEARS FROM NORMAL ABRASION, THIS CAN BE REPAIRED BY UTILIZING A RUBBER REPAIR KIT. THE SOLE PURPOSE OF THE COVER IS TO PROTECT THE INTERNAL REINFORCEMENT WIRES THAT HOLD THE PRESSURE.
4. IF NO INTERNAL WIRES ARE EXPOSED, REPAIR THE COVER DAMAGE BEFORE IT BECOMES WORSE AND EXPOSES THE INTERNAL REINFORCEMENT WIRES TO THE EFFECTS OF THE ELEMENTS. FULL PRESSURE INTEGRITY REMAINS.
5. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE EXPOSED, CHECK FOR ANY TYPE OF RUST/DETERIORATION OR BREAKS. IF THE WIRES ARE NOT DAMAGED, CLEAN THE AREA AND REPAIR WITH RUBBER REPAIR KIT. FULL PRESSURE INTEGRITY REMAINS.
6. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE DAMAGED, THE HOSE SHOULD BE REMOVED FROM SERVICE IMMEDIATELY AND CONSIDERED UNSAFE FOR FURTHER SERVICE.

Marine, Industrial, and Oilfield Hose
Made in the U.S.A.

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

**VISUAL INSPECTION
ASSEMBLIES WITH STAINLESS STEEL PROTECTIVE ARMOR**

1. FOLLOW STEPS 1 AND 2 FOR ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR.
2. IF THE OUTER STL/ST PROTECTIVE ARMOR HAS BEEN BROKEN, EXAMINE THE RUBBER COVER FOR GOUGES OR TEARS FROM NORMAL ABRASION. THEN FOLLOW STEP 4 FOR ASSEMBLIES WITHOUT STAINLESS STEEL PROTECTIVE ARMOR.
3. SECURE LOOSE ENDS OF PROTECTIVE ARMOR TO PROTECT AGAINST ADDITIONAL GOUGES OR TEARS TO RUBBER COVER.
4. HOSE ASSEMBLY SHOULD BE RETURNED TO COPPER STATE RUBBER, PHOENIX, ARIZONA USA AS SOON AS POSSIBLE FOR REPAIRS TO PROTECTIVE ARMOR.
5. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE EXPOSED, CHECK FOR ANY TYPE OF RUST/DETERIORATION OR BREAKS. IF THE WIRES ARE NOT DAMAGED, CLEAN THE AREA AND REPAIR WITH RUBBER REPAIR KIT. FULL PRESSURE INTEGRITY REMAINS.
6. IF ANY OF THE INTERNAL REINFORCEMENT WIRES ARE DAMAGED, THE HOSE SHOULD BE REMOVED FROM SERVICE IMMEDIATELY AND CONSIDERED UNSAFE FOR FURTHER SERVICE.

CSR RECOMMENDS VISUAL INSPECTION WHENEVER POSSIBLE, ON A DAILY BASIS.

HYDROSTATIC TEST

1. TEST HOSE TO 1-1/4 TIMES MAX. ALLOWABLE WORKING PRESSURE WITH WATER, OIL, OR MUD BEING SURE ALL AIR HAS BEEN BLED OFF. HOLD FOR 15 MINUTES AFTER PRESSURE HAS STABILIZED

CSR RECOMMENDS HYDROSTATIC TEST AT APPROXIMATELY 6 MONTH INTERVALS ON RIG AND HOSE BE RETURNED TO OEM FOR INSPECTION AND RECERTIFICATION AT 5 YEARS FROM MANUFACTURE



COPPER STATE RUBBER

**14141 S WAYSIDE DR.
HOUSTON, TEXAS 77048
TEL: (713) 644-1491
FAX: (713) 644-9830**

WARRANTY TERMS AND CONDITONS

COPPER STATE RUBBER DRILLING HOSES ARE GUARANTEED FOR THE PERIOD OF 12 MONTHS (FROM DATE OF FIRST SERVICE) TO BE FREE FROM DEFECTS IN MATERIALS AND/OR WORKMANSHIP.

IN ORDER TO ESTABLISH A VALID WARRANTY CLAIM, CUSTOMER MUST GIVE NOTICE TO COPPER STATE RUBBER WITHIN 10 DAYS AFTER DISCOVERING THE DEFECT. WE WILL ADVISE IF HOSE SHOULD BE RETURNED TO FACTORY FOR INSPECTION (FREIGHT PREPAID). IF COPPER STATE DETERMINES HOSE TO BE DEFECTIVE, COPPER STATE WILL REPAIR OR REPLACE (AT ITS OPTION) THE HOSE IN QUESTION. ALL REPAIRS AND REPLACEMENTS WILL BE F.O.B. COPPER STATE RUBBER'S PLANT.

**REMOVAL OR WELDING OF END
FITTINGS WILL VOID WARRANTY**

INDEPENDENCE CONTRACT DRILLING
P.O. NO.: PO00116446
DATE: FEBRUARY 23, 2018
FILE NO.: CSR / SPECO-81069

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body
	From	To							
13.5"	0	975	10.75"	45.5	N80	BTC	5.54	1.20	23.44
9.875"	0	11750	7.625"	29.7	P110	BTC	1.29	1.11	3.11
6.75"	0	11250	5.5"	23	P110	BTC	1.95	2.04	3.25
6.75"	11250	17,212	5"	18	P110	BTC	1.95	2.04	3.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 500' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	875	13.375"	54.5	J55	STC	2.82	1.27	10.78
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.00	3.25
12.25"	4000	4875	9.625"	40	L80	LTC	1.21	1.45	5.73
8.75"	0	14,768	5.5"	17	P110	LTC	1.50	2.69	2.54
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1810	13.375"	54.5	J55	STC	1.36	4.30	5.21
12.25"	0	5645	9.625"	40	L80	LTC	1.21	1.18	3.22
8.75"	0	16,352	5.5"	17	P110	LTC	1.24	2.19	2.26
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1810	13.375"	54.5	J55	STC	1.36	4.30	5.21
12.25"	0	5645	9.625"	40	L80	LTC	1.21	1.18	3.22
8.75"	0	16,352	5.5"	17	P110	LTC	1.24	2.19	2.26
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating, LLC - Little Bear Federal Com 6H

1. Geologic Formations

TVD of target	11,576'	Pilot hole depth	NA
MD at TD:	16,352'	Deepest expected fresh water:	702'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	1781	Water	
Top of Salt	1861	Salt	
Base of Salt	3510	Salt	
Yates	3651	Salt Water	
Capitan Reef	3823	Salt Water	
Base of Reef/ CYCN	5617	Oil/Gas	
Brushy Canyon	7010	Oil/Gas	
Bone Spring Lime	8751	Oil/Gas	
U. Avalon Shale	9072	Oil/Gas	
L. Avalon Shale	9140	Oil/Gas	
1st Bone Spring Sand	9781	Oil/Gas	
2nd Bone Spring Sand	10330	Oil/Gas	
3rd Bone Spring Sand	11117	Oil/Gas	
Wolfcamp	11722	Target Oil/Gas	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1810	13.375"	54.5	J55	STC	1.36	4.30	5.21
12.25"	0	5645	9.625"	40	L80	LTC	1.21	1.18	3.22
8.75"	0	16,352	5.5"	17	P110	LTC	1.24	2.19	2.26
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating, LLC - Little Bear Federal Com 6H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	Y
If yes, does production casing cement tie back a minimum of 50' above the Reef?	Y
Is well within the designated 4 string boundary?	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	Y
If yes, are the first three strings cemented to surface?	Y
Is 2 nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

COG Operating, LLC - Little Bear Federal Com 6H

3. Cementing Program

Casing	# Sks	Wt. lb/ gal	Yld ft ³ / sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	790	12.7	2.0	9.6	16	Lead: 35:65:6 C Blend
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl
Inter., Stage 1	330	12.7	1.98	10.6	16	Lead: 35:65:6 C Blend
	200	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl
DV/ECP @ 3710						
Inter., Stage 2	650	12.7	2.0	10.6	16	Lead: Class C + 4% Gel + 1% CaCl ₂
	200	14.8	1.35	6.34	8	Tail: Class C + 2% CaCl
5.5 Prod	1370	11.9	2.5	19	72	Lead: 50:50:10 H Blend
	1450	14.4	1.24	5.7	19	Tail: 50:50:2 Class H Blend

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	0'	35% OH in Lateral (KOP to EOL) – 40% OH in Vertical

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	---

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12-1/4"	13-5/8"	3M	Annular	x	1500 psi
			Blind Ram	X	3M
			Pipe Ram	X	
			Double Ram		
			Other*		
8-3/4"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram	x	5M
			Pipe Ram	x	
			Double Ram		
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
N	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

COG Operating, LLC - Little Bear Federal Com 6H

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Saturated Brine	9.8 - 10.2	28-34	N/C
9-5/8" Int shoe	Lateral TD	Cut Brine	8.6 - 10	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

COG Operating, LLC - Little Bear Federal Com 6H

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6020 psi at 11576' TVD
Abnormal Temperature	NO 170 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other Facets of Operation

Y	Is it a walking operation?
N	Is casing pre-set?

x	H ₂ S Plan.
x	BOP & Choke Schematics.
x	Directional Plan



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

08/08/2018

APD ID: 10400029649

Submission Date: 04/20/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Well Type: OIL WELL

Well Work Type: Drill



[Show Final Text](#)

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

COG_Little_Bear_6H_Exist_Rd_20180420091240.pdf

Existing Road Purpose: ACCESS

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

COG_Little_Bear_6H_MapsPlats_20180420091401.pdf

New road type: TWO-TRACK

Length: 2289.9

Feet

Width (ft.): 30

Max slope (%): 33

Max grade (%): 1

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Water will be diverted where necessary to avoid ponding, prevent erosion, maintain good drainage, and to be consistent with local drainage patterns.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: Caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: Blading

Access other construction information: No turnouts are planned. Re-routing access road around proposed well location.

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: None necessary.

Road Drainage Control Structures (DCS) description: None needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

COG_Little_Bear_6H_1Mile_Data_20180420091414.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Production will be sent to the proposed Little Bear #1H & 6H Central Tank Battery. A tank battery and facilities will be constructed adjacent to the north side of the Little Bear Federal Com #1H and 6H location as shown on the production facility layout. The tank battery and facilities will be installed according to API specifications. No flow lines will be needed at this time.

Production Facilities map:

COG_Little_Bear_6H_CTB_20180420091431.pdf

COG_Little_Bear_6H_Prod_Facility_20180420091438.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: INTERMEDIATE/PRODUCTION CASING

Water source type: OTHER

Describe type: Brine H2O

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: COMMERCIAL

Water source transport method: TRUCKING

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 22500

Source volume (acre-feet): 2.9000947

Source volume (gal): 945000

Water source use type: STIMULATION, SURFACE CASING

Water source type: OTHER

Describe type: Fresh H2O

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 337500

Source volume (acre-feet): 43.50142

Source volume (gal): 14175000

Water source and transportation map:

COG_Little_Bear_6H_Brine_H2O_20180420091506.pdf

COG_Little_Bear_6H_Fresh_H2O_20180420091516.pdf

Water source comments: Fresh water will be obtained from Berry Ranch/GWWS water well located in Section 34. T20S. R34E. Brine water will be obtained from the Salty Dog Brine station in Section 5. T19S. R36E.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Caliche will be obtained from the actual well site if available. If not available onsite, or is not plentiful from the well site, caliche will be obtained from Danny Berry caliche pit located in Section 28, T20S, R34E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and produced oil and water during drilling and completion operations

Amount of waste: 6000 barrels

Waste disposal frequency : One Time Only

Safe containment description: All drilling waste will be stored safely and disposed of properly

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: SEWAGE

Waste content description: Human waste and gray water

Amount of waste: 250 gallons

Waste disposal frequency : Weekly

Safe containment description: Waste will be properly contained and disposed of properly at a state approved disposal facility

Safe containmant attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations

Amount of waste: 125 pounds

Waste disposal frequency : Weekly

Safe containment description: Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Roll off cuttings containers on tracks

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

COG_Little_Bear_6H_CTB_20180420091544.pdf

COG_Little_Bear_6H_Prod_Facility_20180420091551.pdf

Comments: Production will be sent to the proposed Little Bear #1H & 6H Central Tank Battery. A tank battery and facilities will be constructed adjacent to the north side of the Little Bear Federal Com #1H and 6H location as shown on the production facility layout. The tank battery and facilities will be installed according to API specifications. No flow lines will be needed at this time.

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: LITTLE BEAR FEDERAL COM

Multiple Well Pad Number: 1H AND 6H

Recontouring attachment:

Drainage/Erosion control construction: Approximately 400' of straw waddles will be placed on the east and 400' on the south side to reduce sediment impacts to fragile/sensitive soils.

Drainage/Erosion control reclamation: Reclaim west side 80' and south side 80'

Well pad proposed disturbance (acres): 3.67	Well pad interim reclamation (acres): 0.15	Well pad long term disturbance (acres): 2.35
Road proposed disturbance (acres): 0.74	Road interim reclamation (acres): 0.74	Road long term disturbance (acres): 0.74
Powerline proposed disturbance (acres): 0	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 0	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 4.41	Total interim reclamation: 0.89	Total long term disturbance: 3.09

Disturbance Comments:

Reconstruction method: New construction of pad.

Topsoil redistribution: Reclaim west side 80' and south side 80'

Soil treatment: None

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Existing Vegetation at the well pad: Shinnery Oak/Mesquite grassland

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: N/A

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
-----------	-------------

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: Rand

Last Name: French

Phone: (432)254-5556

Email: rfrench@concho.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: N/A

Weed treatment plan attachment:

Monitoring plan description: N/A

Monitoring plan attachment:

Success standards: N/A

Pit closure description: N/A

Pit closure attachment:

COG_Little_Bear_6H_Closed_Loop_20180420092745.pdf

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: Onsite completed on 2/18/2018 by Rand French (COG) and Jeff Robertson (BLM).

Other SUPO Attachment

COG_Little_Bear_6H_Certification_20180420091615.pdf

	WELL NAME	SHL	ELEV.
1	LITTLE BEAR FED COM #5H	384' FSL & 1091' FWL	3805.1'
2	LITTLE BEAR FED COM #9H	384' FSL & 1121' FWL	3804.5'
3	LITTLE BEAR FED COM #4H	384' FSL & 1151' FWL	3804.4'
4	LITTLE BEAR FED COM #8H	696' FSL & 2197' FEL	3804.5'
5	LITTLE BEAR FED COM #3H	696' FSL & 2167' FEL	3805.2'
6	LITTLE BEAR FED COM #7H	696' FSL & 2137' FEL	3806.0'
7	LITTLE BEAR FED COM #6H	387' FSL & 660' FWL	3791.1'
8	LITTLE BEAR FED COM #1H	387' FSL & 690' FWL	3791.0'



LEGEND

- WELL
- WELLPAD
- ▨ TANK BATTERY
- EXISTING ROAD
- PROPOSED ROAD
- PREVIOUSLY STAKED ROAD

LITTLE BEAR FED COM WELLS & CTBS

SECTIONS: 33, 34 TOWNSHIP: 20 S. RANGE: 34 E.
 STATE: NEW MEXICO COUNTY: LEA SURVEY: N.M.P.M.
 W.O. # 18-120, 124-130, 132-136 LEASE: LITTLE BEAR FED COM

0 2,500 FEET

0 0.1 0.2 0.4 Miles

1 IN = 1,750 FT

LOCATION MAP

IMAGERY

3/23/2018

A.M.



COG OPERATING, LLC



HARCROW SURVEYING, LLC.
 2314 W. MAIN ST, ARTESIA, NM 88210
 PH: (575) 746-2158 FAX: (575) 746-2158
 TEXAS FIRM NO. 10194089
 c.harcrow@harcrowsurveying.com

Surface Use Plan
COG Operating LLC
Little Bear Federal Com 6H
SHL: 387' FSL & 660' FWL UL M
Section 34, T20S, R34E
BHL: 200' FNL & 330' FWL UL D
Section 34, T20S, R34E
Lea County, New Mexico

OPERATOR CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Operating LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 4th day of APRIL, 2018.

Signed: Mayte Reyes

Printed Name: Mayte Reyes

Position: Regulatory Analyst

Address: 2208 W. Main Street, Artesia, NM 88210

Telephone: (575) 748-6945

E-mail: mreyes1@concho.com

Field Representative (if not above signatory): Rand French

Telephone: (575) 748-6940. E-mail: rfrench@concho.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

08/08/2018

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



**U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT**

Bond Info Data Report

08/08/2018

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000215

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 6H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	330	FNL	330	FWL	20S	34E	34	Aliquot NWN W	32.53593 6	- 103.5555 95	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000882 2	- 764 7	162 21	114 38
BHL Leg #1	200	FNL	330	FWL	20S	34E	34	Aliquot NWN W	32.53629 3	- 103.5555 96	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 000882 2	- 778 5	163 52	115 76