		. `				
orm 3160-3 June 2015) UNITED STATES	HO	RESPON		OMB No	APPROVED b. 1004-0137 inuary 31, 201	NV1/1 5 UR, 8
DEPARTMENT OF THE INBUREAU OF LAND MANA APPLICATION FOR PERMIT TO D	NTERIOR (AGEMENT		FOC.	5. Lease Serial No. NMLC0063993 (Tandian, Allotee	or Tribe Name	· ·
b. Type of Well: Oil Well Gas Well Ot	EENTER ther ngle Zone	Multiple Zone		7. If Unit or CA Agr 8. Lease Name and BELL LAKE UNIT 202H	Well No.	
Name of Operator KAISER FRANCIS OIL COMPANY (12361)				9/API Well No.	4507	9 (
a. Address 6733 S. Yale Ave. Tulsa OK 74121 Location of Well (Report location clearly and in accordance was At surface SWNW / 2070 FNL / 295 FWL / LAT 32.248 At proposed prod. zone SWSW / 330 FSL / 1230 FWL / L	(918)491-00 with any State 171 / LONG	requirements.*) -103.533656		ANTELOPE RIBO	Blk. and Surv	ONE SPRIT
4. Distance in miles and direction from nearest town or post offi				12. County or Parish	13.	State
5. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 8. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 3007 feet	16. No of ac 160 19. Proposec 10800 feet.		240 20/BLM/	BIA Bond No. in file	his well	
1. Elevations (Show whether DF, KDB, RT, GL, etc.) 3632 feet	01/01/2018	mate date work will	start*	23. Estimated durati 40 days	on	
the following, completed in accordance with the requirements of as applicable) Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System SUPO must be filed with the appropriate Forest Service Office)	m Lands, the	and Gas Order No. 4. Bond to cover the litem 20 above). 5. Operator certifications and the second	he operation cation.	fydraulic Fracturing russ sunless covered by armation and/or plans as	n existing bond	I on file (see
5. Signature Electronic Submission)		(Printed/Typed) ie Wilson / Ph: (57	75)914-146	1	Date 11/01/2017	
Regulatory Analyst pproved by (Signature) Electronic Submission)	ľ	(Printed/Typed) _ayton / Ph: (575)	234-5959		Date 08/23/2018	
Assistant Field Manager Lands & Minerals pplication approval does not warrant or certify that the applican pplicant to conduct operations thereon. conditions of approval, if any, are attached.	t holds legal o		hose rights	in the subject lease wh	hich would en	title the

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 09/05/18

pproval Date: 08/23/2018

Require NEL

*(Instructions on page 2)

(Continued on page 2)

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the wen, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionany drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service wen or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record win be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM conects this information to anow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Conection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well


1. SHL: SWNW / 2070 FNL / 295 FWL / TWSP: 24S / RANGE: 33E / SECTION: 1 / LAT: 32.248171 / LONG: -103.533656 (TVD: 0 feet, MD: 0 feet)

PPP: NWSW / 2640 FSL / 1230 FWL / TWSP: 24S / RANGE: 33E / SECTION: 12 / LAT: 32.232122 / LONG: -103.530657 (TVD: 10800 feet, MD: 16450 feet)

PPP: NWNW / 0 FNL / 1240 FWL / TWSP: 24S / RANGE: 33E / SECTION: 12 / LAT: 32.239377 / LONG: -103.530645 (TVD: 10800 feet, MD: 13800 feet)


PPP: NWSW / 2600 FSL / 1240 FWL / TWSP: 24S / RANGE: 33E / SECTION: 1 / LAT: 32.246523 / LONG: -103.530605 (TVD: 10800 feet, MD: 11181 feet)

BHL: SWSW / 330 FSL / 1230 FWL / TWSP: 24S / RANGE: 33E / SECTION: 12 / LAT: 32.225754 / LØNG: -103.530629 (TVD: 10800 feet, MD: 18736 feet)

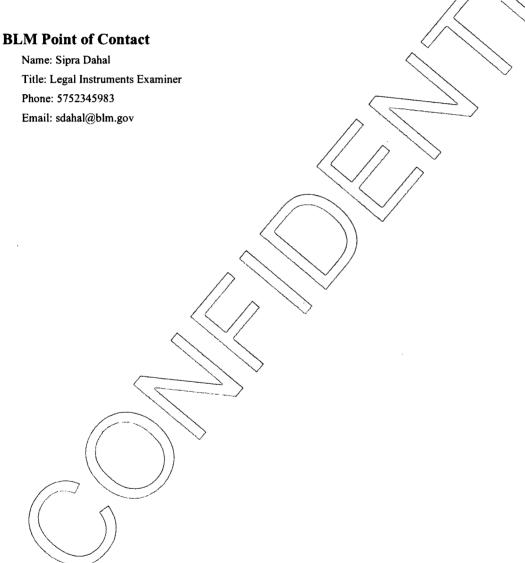

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

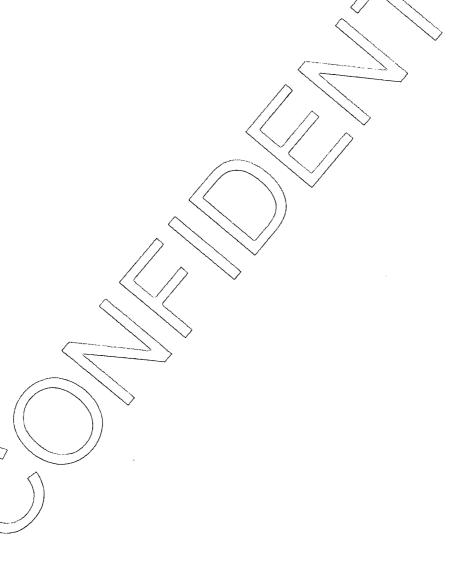



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Melanie Wilson Signed on: 11/01/2017

Title: Regulatory Analyst

Street Address: 106 W. Riverside Drive

City: Calsbad State: NM Zip: 88220

Phone: (575)914-1461

Email address: mjp1692@gmail.com

Field Representative

Representative Name: Robert Sanford

Street Address: 6733 S Yale Ave

City: Tulsa State: OK Zip: 74136

Phone: (918)770-2682

Email address: roberts@kfoc.net



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



APD ID: 10400023373

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT SOUTH

Well Type: OIL WELL

Submission Date: 11/01/2017

Well Number: 202H

Well Work Type: Drill

Show Final Text

Section 1 - General

APD ID:

10400023373

Tie to previous NOS? 10400013193

Submission Date: 11/01/2017

BLM Office: CARLSBAD

User: Melanie Wilson

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMLC0063993

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Zip: 74121

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: KAISER FRANCIS OIL COMPANY

Operator letter of designation:

Operator Info

Operator Organization Name: KAISER FRANCIS OIL COMPANY

Operator Address: 6733 S. Yale Ave.

Operator PO Box: PO Box 21468

Operator City: Tulsa

State: OK

Operator Phone: (918)491-0000

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: ANTELOPE RIDGE Pool Name: BONE SPRING

WEST

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 0

Well Class: HORIZONTAL

SOUTH BELL LAKE UNIT Number of Legs: 1

Well Work Type: Drill
Well Type: OIL WELL
Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 25 Miles Distance to nearest well: 3007 FT Distance to lease line: 295 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: Bell_Lake_Unit_South_202H_C102_20171101142902.pdf

Well work start Date: 01/01/2018 Duration: 40 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83 Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	207 0	FNL	295	FWL	248	33E	1	Aliquot SWN W	32.24817 1	- 103.5336 56	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	363 2	0	0
KOP Leg #1	207 0	FNL	295	FWL	248	33E	1	Aliquot SWN W	32.24808 9	- 103.5306 02	LEA	NEW MEXI CO		s	STATE	- 609 5	978 1	972 7
PPP Leg #1	260 0	FSL	124 0	FWL	248	33E	1	Aliquot NWS W	32.24652 3	- 103.5306 05	LEA	ſ	NEW MEXI CO	s	STATE	- 716 8	111 81	108 00

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	0	FNL	124 0	FWL	248	33E	12	Aliquot NWN W	32.23937 7	- 103.5306 45	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063993	- 716 8	138 00	108 00
PPP Leg #1	264 0	FSL	123 0	FWL	248	33E	12	Aliquot NWS W	32.23212 2	- 103.5305 57	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 716 8	164 50	108 00
EXIT Leg #1	330	FSL	123 0	FWL	248	33E	12	Aliquot SWS W	32.22575 4	- 103.5306 29	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 716 8	187 36	108 00
BHL Leg #1	330	FSL	123 0	FWL	248	33E	12	Aliquot SWS W	32.22575 4	- 103.5306 29	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 063798	- 716 8	187 36	108 00

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Pressure Rating (PSI): 5M

Rating Depth: 18000

Equipment: Annular. The BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and

choke manifold.

Requesting Variance? YES

Variance request: Flex Hose Variance

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.

Choke Diagram Attachment:

Bell_Lake_Unit_South_202H_Chk_Man_Rev_1_20180805182706.pdf

BOP Diagram Attachment:

Bell_Lake_Unit_South_202H_FLEX_HOSE_DATA_20180206170230.pdf

Bell_Lake_Unit_South_202H_BOP_Rev_1_20180805182554.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1350	0	1350			1350	J-55	54.5	STC	1.8	4.3	DRY	7	DRY	11.6
	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	5200	0	5200			1	HCP -110	40	LTC	1.5	2.9	DRY	6.1	DRY	6.1
	PRODUCTI ON	8.75	5.5	NEW	API	N	0	18736	0	18736			18736	P- 110	20	BUTT	2.2	2.5	DRY	2.5	DRY	3

Casing Attachments

erator Name: KAISER FRA	NCIS OII COMPANY		
ell Name: BELL LAKE UNIT		Well Number: 202H	
			
sing Attachments			
Casing ID: 1	String Type:SURFACE		
Inspection Document:			
Spec Document:			
Tapered String Spec:			
Casing Design Assumption	ns and Worksheet(s):		
Bell_Lake_Unit_South	n_202H_CSG_ASSUMPTIO	N_20171101152350.pdf	
Casing ID: 2	String Type:INTERMEDIATE	=	
Inspection Document:			
Spec Document:			
Tapered String Spec:		. :	
Casing Design Assumption	ns and Worksheet(s):		
	n_202H_CSG_ASSUMPTIOI	N_20171101152358.pdf	
Casing ID: 3	String Type: PRODUCTION		
Inspection Document:			
Spec Document:			

Section 4 - Cement

Casing Design Assumptions and Worksheet(s):

 $Bell_Lake_Unit_South_202H_CSG_ASSUMPTION_20171101152410.pdf$

Tapered String Spec:

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1350	780	1.73	12.8	1414. 42	100	SLB Lead	30% Extender
SURFACE	Tail		0	1350	272	1.66	13.6	451.4 5	100	SLB Tail	2% Extender
INTERMEDIATE	Lead		0	5200	1000	2.02	12.6	2020	50	SLB Lead	30% Extender
INTERMEDIATE	Tail		0	5200	246	1.29	14.2	317.3 4	50	SLB Tail	44% Extender
PRODUCTION	Lead		4700	1873 6	590	2.81	11	1646	25	NeoCem	-
PRODUCTION	Tail		4700	1873 6	1735	1.47	13.2	2543	15	NeoCem	0.6% HR-601

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (Ibs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	H	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
5200	1873 6	OTHER : Cut Brine	8.7	8.9							
1350	5200	OTHER : Brine	10	10.2							
0	1350	OTHER : Fresh Water	8.4	9							

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

GR,MUDLOG

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4998

Anticipated Surface Pressure: 2622

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Bell_Lake_Unit_South_202H_H2S_PLAN_20171101153812.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Bell_Lake_Unit_South_202H_DIRECTIONAL_PLAN_20171101152901.pdf


Other proposed operations facets description:

Gas Capture Plan attached

Other proposed operations facets attachment:

Bell_Lake_Unit_South_202H_Gas_Capture_Plan_20180206170255.pdf

Other Variance attachment:

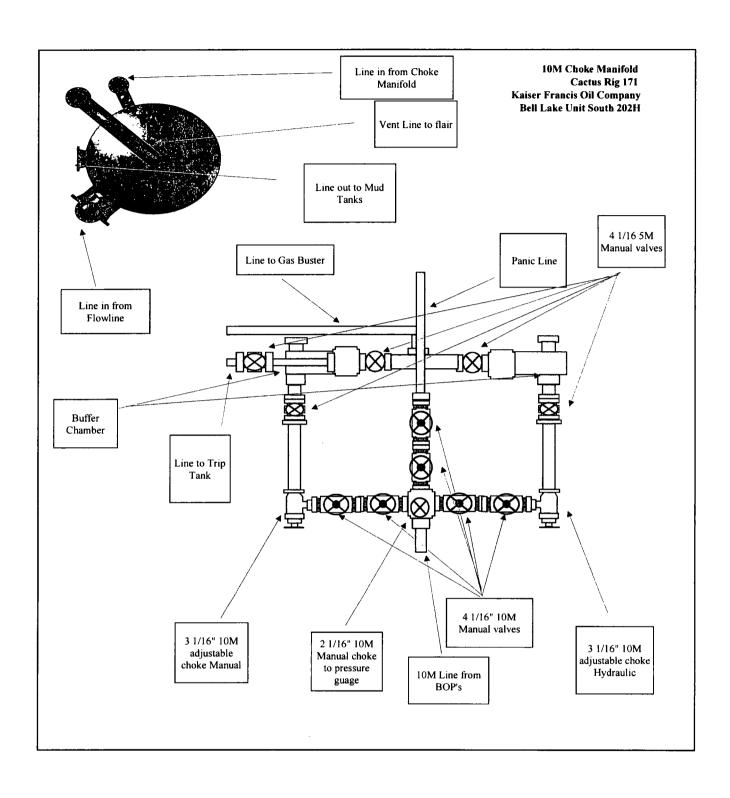



GATES E & S NORTH AMERICA, INC. 7603 Prairie Oak Dr. Houston, TX 77086

PHONE: 281-602-4119

FAX:

EMAIL: Troy.Schmidt@gat WEB: www.gates.com

10K ASSEMBLY PRESSURE TEST CERTIFICATE

A-7 AUSTIN INC DBA AUSTIN HOSE 10/3/2017 Test Date: Customer: Customer Ref. : 4086301 Hose Serial No.: H-100317-2 508588 Irene Pizana Invoice No.: Created By: 10K3.035.0CM4.1/16FLGE/E Product Description: 4 -1/16 10K FLANGE - FIXED 4 -1/16 10K FLANGE - FLOATING End Fitting 2: End Fitting 1: 68603010-9710398 Gates Part No. : Assembly Code: L39789092117H-100317-2

Gates E & S North America, Inc. certifies that the following hose assembly has successfully passed all pressure testing requirements set forth in Section 9.7.7 and Table 10 of API 7K, Sixth Edition (December 2015).

10,000 PSI

/2017

Quality:

Date:

Signature:

Working Pressure:

QUALITY Produciton:

Date :

Test Pressure:

Signature:

PRODUCTION

15,000 PSI

Form PTC - 01 Rev.0 2



Gates E&S North America, Inc. 7603 Prairie Oak Dr. Houston, TX. 77086

PHONE:

Troy.Schmidt@gates.com

CERTIFICATE OF CONFORMANCE

This is to verify that all Parts and/or Materials included in this shipment have been manufactured and/or processed in Conformance with applicable drawings and specifications, and that Records of Required Tests are on file and subject to examination. The following items were assembled at **Gates E & S, North America Inc.**, facilities in Houston, TX, USA. This hose assembly was designed and manufactured to meet requirements of API Spec 7K.

CUSTOMER: A-7 AUSTIN INC DBA AUSTIN HOSE

CUSTOMERS P.O.#: 4086301

PART DESCRIPTION: 10K3.035.0CM4.1/16FLGE/E

SALES ORDER #: 508588

QUANTITY: 1

SERIAL #: H-100317-2

SIGNATURE:

QUALITY ASSURANCE

DATE:

10/3/2017



COMPANY DETAILS

Company: Austin

Contact: Phone: Email: Irene.pizana@gates.com

JOB DETAILS

DATE October 03, 2017

START TIME 10:38:29

END TIME 11:00:25

Gates Rep: Chris Olivo

Recommendation: H-100317-2

Working Pressure: 10000

Ext Inspection: Pass

Fitting Inspection: Pass

Test pressure: 15000

Serial No: H-100317-2

Length: 35'


Inner Diameter: 3.0"

Pressure Test: Pass


Internal Inspection: N/A

Fitting Type: 10K Flange ExE



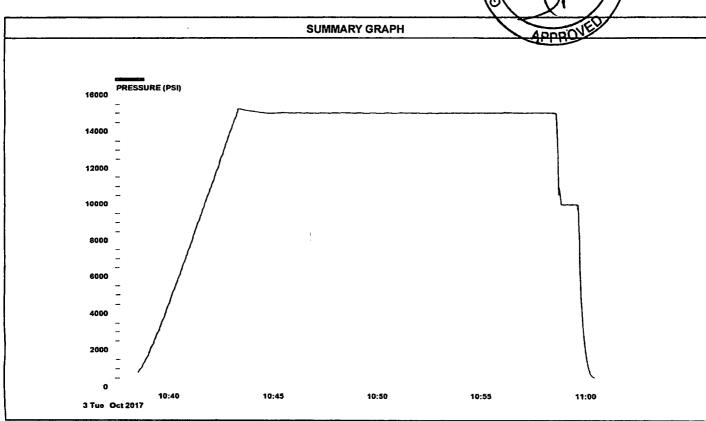

Report Created: 3-Oct-17

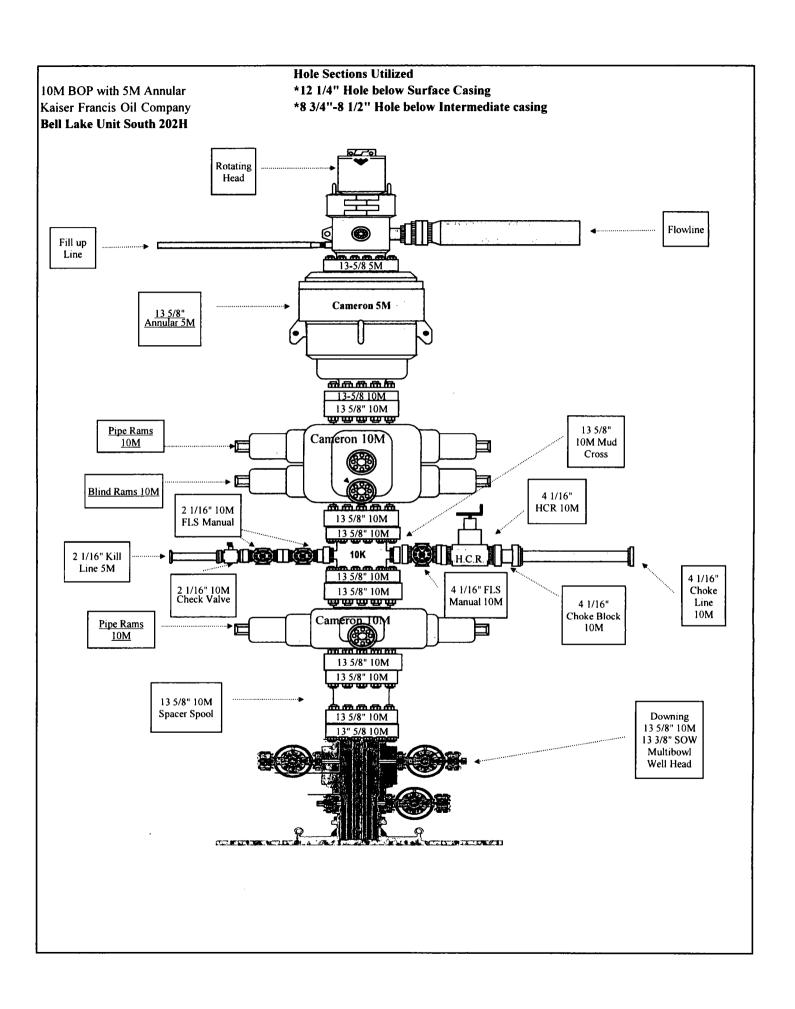

Kaiser-Francis Oil Company Bell Lake Unit South #202H Casing Assumptions

Joint Tensile Safety	Factor	7.0	6.1	2.5	
Body Femsile Safety	Factor	11.6	6.1	3.0	
Burst Safety Factor	(Min 1.0)	4.3	5.9	5.5	
Collapse Burst Safety Safety Factor Factor	Mr 1.1)	1.8	1.5	2.2	
		8	8	8	İ
Joint Tensile	,	214	1266	248	
Body Tensile		853000	7260000	641000	
Burst (psl)		2730	200	12640	
Collapse (psi)		1330	4230	11100	
Max Pore Pressure	ì	269	2758	4998	
Anticipated Max Pore Cellapse Burst Tensile Te	1	6	10.2	8.9	
3 8		ž	Š	Ŋ.	
ht Viscosity F		32 - 34	28	28-29	
Mud Weight Hole	Cantrol	8.4 - 9.0	10-10.2	8.7 - 8.9	
Mud Type		EW.	Brine	Cut Brine	
 TVD (ft)	120	1350	2200	10800	
Hole		17-17	12-1/4	8-3/4"	
Condition	New	New	New	New	
Thread		STC	τıc	BTC	
Weight Hoje Thread Condition Size		55-1	HCP-110	0114	
Weight (#/ft)		54.5	40	02	
Casing Size.	50,	13-5/8"	.8/5-6	5-1/2.	
Longth	120,	1350	\$200,	18736	
interval	Conductor	Surface	Intermediate	Production	
5 €		Ī	Ī	_	_
Formation Top TVD	1400	1825	2000	2000	2200

riot. Tensi	į	F.	0.7	1'9	5'7										
Body Tensile	Safety	Factor	11.6	6.1	3.0										
Burst Safety	Factor	(Min 1.0)	4.3	5.9	5.5										
Collapse Safety	Factor	(Min 1.1)	1.8	1.5	2.2										
Joint	į	ou Bur	514000	1266000	548000										
Body		us Tueste	853000	1260000	641000										
Burst	Î		2730	2006	12640										
•	î		1330	4230	11100										
Max Pore	1	í.	632	2758	4998										
Anticipated		(Made)	6	10.2	8.9										
Fluid	ŝ		ž	ž	Š										
Merculby			32 - 34	58	58-59										
Mud Weight	Hole	Control	8.4-9.0	10-10.2	8.7 - 8.9										
Mary Types			Md	Brine	Cut Brine										
٠.	₹) GV	120	1350	2200	10800										
Hole	Size		17-1/2	12-1/4	8-3/4"										
	Grade Thread Condition Size	New	New	New	New										
	Presid		STC	110	BTC										
	Grade		55-1	HCP-110	0119										
Weight	₽		5.45	0\$*	02										
Casing	Sire	.02	.8/5·ET	.8/5-6	.2/1-5										
	Longth	120.	05E1	2200,	18736										
	interval	Conductor	Surface	Intermediate	Production										
Formation	Top TVD	1400	1825	2000	2000	2200	5400	6250	7725	8865	9057	10100	10635	11150	11630
	Name	Rustier	Salado	Top of Salt	Base of Salt	Lamar	Bell Canyon	Cherry Canyon	Brushy Canyon	Bone Spring	Avalon	1 855	2 855	3 821	3 855
			_	_	_	_	_	_	_	_	_	_	_	_	_

Kaiser-Francis Oil Company Bell Lake Unit South 8202H Casing Assumptions

																							L COVS	anyer? (fed
																							2500	16msJ
2.5	0.£	2.5	7.2	248000	641000	15640	11100	8669	6'8	ON	6Z-8Z	6.8 - 7.8	Cut Brine	0080T	"4\E-8	Wall	218	P110	50	.Z/T-S	.96781	noisoubor9	0005	#s2 to ass8
T '9	1.8	6°Z	5'T	1266000	1360000	0064	OECA	8272	10.2	ON	85,	10 - 10.2	Brine	2200	15-1/4	WSW	DTJ.	HCP-110	0.	.8/S-6	,0075	Intermediate	2000	fisc to qoT
0.7	9'TT	£.p	1.8	274000	000£28	2730	OETT	ZE9	6	ON	32 - 34	0.6 - 4.8	₩÷	OSEI	17-1/2	WBN	STC	55-1	5.62	.8/S-ET	,0SET	Surface	7852	obsis2
Factor	103363	(O.£ niM)	(Min 1.1)	anguane	22.euTcu			fandl	(3dd)			fortnoo		750		Wall				"OZ	150,	Conductor	1400	Rustler
Vaste2	Aseses	102367	Teather!	7	•••	(lsd)	(jsd)	anuscare,		8807	Appropria	etoH.		(H) avr	ezis	Condition	basinT	Grade	(H/H)	eziş	dognad	feviern	OVT qoT	aman
MisneT	SlitnaT	Yseteč	Yzeñeč	elieaeT	elitreT	3znu8	Collapse		1431sW buM	biuli	Miscosite	1/12jaW	eqyT butM	l	하아				Welght	\$nizs2	١. ا		Formation	nottemto1
3miol.	Apog	.teru8	Collapse	fniot	, Apog	1	l .⁺	atog seM	Anticipited			pnw	1 1	l							1		1	j

	SEGTT	Wolfcamp
	DESTI	3 BSS
	OSTIT	158 E
	2E901	2 855
	10100	1 e22
	4906	nolsvA
	5988	Bone Spring
	2775	Brushy Canyon
	0529	Cherry Canyon
	001/5	Bell Canyon
	2500	16ms]
2019	000S	fis2 to ass8
1#\$m[2000	fist to qoT
ns	1852	obeleč
Con	1400	Rustler
141	OVT qoT	amen
- 1	DODEUJO4	nottemto1

11935	Wolfcamp
17630	3 822
OSTIT	3 821
10635	2 855
10100	I 822
L \$06	noisvA
2988	gning2 ano8
2777	Brushy Canyon
9520	Слеггу Сапупп
2400	Bell Canyon
2500	18M6J
0005	fisc to assa

5.5	0.E	5.5	7.2 2.1	7599000	1260000	009ZT	11100	8664	ξ.0.f	ON ON	58-59 58	2.01 - 01 8.7 - 8.9	Brine Cut Brine	00801	8-3\¢	WeN	DT6	P110	30	Z/T-S 8/S-6	,9878f	ntermediate Production
0.7	9'11	6.4	3.8	214000	000628	DEYS	OETT	ZE9	6	ON	32 - 34	0.6 - 1.8	Μ±	OSET	.Z/I-LT	New	STC	SS-f	5.62	.8/S-ET	1320,	Surface
107267	101564	(Min 1.0)	(I.I. niM)	mfuanc	2.T. BUB.T.C			ised)	(3dd)			lottec		750		WBM				,,07	150,	Conductor
ytele2.	Yieinz	103361	307361	Sittes!	Tensile	((sd)	((st)	Pressure	MajeW bulk	SSOT	Viscosity	eloH	Mud Type	(#) GVT	eżis	Condition	bsevdT	ehste	(4/#)	, ésis	digned	, lavietri
əliznəT	Mensile	Safety	Yrateč	2 miol	Apog	fared	Collapse		batedistriA sabiate bute	biuH	majaosay,	24gteW	amet heeld	.	, MOH .		1		Melght	griles		
traint	Body	24.10E	Collapse	4-1-1	Who et	1	l	4200	Laszainiera	L	L	, buM	L	l	L	·		L			li	ľ

Katser-Francis Oli Company Bell Lake Unit South #202H Casing Assumptions

KAISER-FRANCIS OIL COMPANY HYDROGEN SULFIDE (H₂S) CONTINGENCY PLAN FOR DRILLING/COMPLETION WORKOVER/FACILITY

BELL LAKE UNIT SOUTH #202H SECTION 1 -T24S-R33E LEA COUNTY, NM

This well/facility is not expected to have H₂S, but due to the sensitive location, the following is submitted as requested.

TABLE OF CONTENTS

Emergency Response Activation and General Responsibilities	3
Individual Responsibilities During An H ₂ S Release	4
Procedure For Igniting An Uncontrollable Condition	5
Emergency Phone Numbers	6
Protection Of The General Public/Roe	7
Characteristics Of H ₂ S And SO ₂	8
Training	8
Public Relations	8
Maps	

EMERGENCY RESPONSE ACTIVATION AND GENERAL RESPONSIBILITIES

Activation of the Emergency Action Plan

In the event of any emergency situation, all personnel on location should first ensure that the following items are initiated. After that, they should refer to the appropriate Specific Emergency Guidance sections below for further responsibilities:

- 1. Notify the senior ranking contract representative on site.
- 2. Notify Kaiser-Francis representative in charge.
- 3. Notify civil authorities if the Kaiser-Francis Representative cannot be contacted and the situation dictates.
- 4. Perform rescue and first aid as required (without jeopardizing additional personnel).

General Responsibilities

In the event of an H₂S emergency, the following plan will be initiated.

- All personnel will immediately evacuate to an up-wind and if possible up-hill "safe area".
- 2) If for any reason a person must enter the hazardous area, they must wear a SCBA (Self contained breathing apparatus).
- 3) Always use the "buddy system".
- 4) Isolate the well/problem if possible.
- 5) Account for all personnel
- 6) Display the proper colors, warning all unsuspecting personnel of the danger at hand
- 7) Contact the Company personnel as soon as possible if not at the location. (use the enclosed call list as instructed)

At this point the company representative will evaluate the situation and coordinate the necessary duties to bring the situation under control, and if necessary, the notification of emergency response agencies and residents.

INDIVIDUAL RESPONSIBILITIES DURING AN H2S RELEASE

The following procedures and responsibilities will be implemented on activation of the H₂S siren and lights.

All Personnel:

1. On alarm, don escape unit (if available) and report to upwind briefing area.

Rig Manager/Tool Pusher:

- 1. Check that all personnel are accounted for and their condition.
- 2. Administer or arrange for first aid treatment, and/or call EMTs as needed.
- Identify two people best suited to secure well and perform rescue, and instruct them to don SCBA.
- 4. Notify Contract management and Kaiser-Francis Representative.
- 5. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.

Two People Responsible for Shut-in and Rescue:

- 1. Don SCBA and acquire tools to secure well and perform rescue, i.e., wrenches, retrieval ropes, etc.
- 2. Utilize the buddy system to secure well and perform rescue(s).
- 3. Return to the briefing area and stand by for further instructions.

All Other Personnel:

1. Isolate the area and prevent entry by other persons into the 100 ppm ROE.

Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

Kaiser-Francis Oil Company Representative:

- 1. Remain at the briefing area, assess and monitor personnel and overall situation for hazards or conditions that might warrant a change in the action plan.
- 2. Notify company management or Local Incident Commander, and Police, Fire Department, or other local emergency services as required.

PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION:

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police shall be the Incident Command of any major release.

The decision to ignite a well should be a last resort and one if not both of the following pertain.

- 1) Human life and/or property are in danger.
- 2) There is no hope of bringing the situation under control with the prevailing conditions at the site.

INSTRUCTIONS FOR IGNITION:

- Two people are required. They must be equipped with positive pressure; self contained breathing apparatus and a "D"-ring style, full body, OSHA approved safety harness. Non-flammable rope will be attached.
- 2) One of the people will be a qualified safety person who will test the atmosphere for H₂S, Oxygen, & LFL. The other person will be the company supervisor; he is responsible for igniting the well.
- 3) Ignite up-wind from a distance no closer than necessary. Make sure that where you ignite from has the maximum escape avenue available. A 25mm flare gun shall be used, with a +/-500' range to ignite the gas.
- 4) Prior to ignition, make a final check for combustible gases.
- 5) Following ignition, continue with the emergency actions & procedures as before.

CONTACTING AUTHORITIES

Kaiser-Francis personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. This response plan must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER).

EMERGENCY CALL LIST: (Start and continue until ONE of these people have been reached)

Kaiser-Francis Oil Co.	<u>OFFCE</u> 918/494-0000	<u>MOBILE</u>
Bill Wilkinson	580/668-2335	580/221-4637
David Zerger	918/491-4350	918/557-6708
Charles Lock	918/491-4337	918/671-6510
Stuart Blake	918/491-4347	918/510-4126
Robert Sanford	918/491-4201	918/770-2682
Matt Warner	918/491-4379	720/556-2313

EMERGENCY RESPONSE NUMBERS: Lea County, New Mexico

	•
State Police – Artesia	575/748-9718
State Police – Hobbs	575/392-5580
State Police – Carlsbad	575/885-3138
Lea County Sheriff - Lovington	575/396-3611
Local Emergency Planning Center – Lea County	575/396-8607
Local Emergency Planning Center – Eddy County	575/885-3581
Fire Fighting, Rescue & Ambulance - Carlsbad	911 or 575/885-3125
Fire Fighting, Rescue & Ambulance – Hobbs	911 or 575/397-9308
Fire Fighting – Jal Volunteer Fire Department	911 or 505/395-2221
New Mexico Oil & Gas Commission – Artesia	575/748-1283
New Mexico Oil & Gas Commission – Hobbs	575/393-6161
Air Medical Transport Services – Hobbs	800/550-1025
Med Flight Air Ambulance – Albuquerque	505/842-4433
Angel MedFlight	844/553-9033
DXP	432/580-3770
BJ Services	575/392-5556
Halliburton	575/392-6531
Tallibutton	800/844-8451
	000/011-0101

PROTECTION OF THE GENERAL PUBLIC/ROE:

In the event of a release with a concentration greater than 100 ppm H₂S, the ROE (Radius of Exposure) calculations will be done to determine if the following conditions have been met:

- Does the 100 ppm ROE include any public area (any place not associated with this site)
- Does the 500 ppm ROE include any public road (any road which the general public may travel)
- Is the 100 ppm ROE equal to or greater than 3000 feet

If any one of these conditions have been met then the Contingency Plan will be implemented. The following shows how to calculate the radius of exposure and an example.

Calculation for the 100 ppm ROE:

(H2S concentrations in decimal form)

10,000 ppm +=1.+

1,000 ppm +=.1+

100 ppm +=.01+

10 ppm +=.001+

Calculation for the 500 ppm ROE: X+[(0.4546)(concentration)(Q)] (.06258)

X = [(1.589)(concentration)(Q)] (0.6258)

EXAMPLE: If a well/facility has been determined to have 150 ppm H₂S in the gas mixture and the well/facility is producing at a gas rate of 200 MCFPD then:

ROE for 100 PPM

X=[(1.589)(.0150)(200)](0.6258)

X=2.65'

ROE for 500 PPM

X=[(.4546)(.0150)(200)] (0.6258)

X=1.2'

(These calculations will be forwarded to the appropriate District NMOCD office when applicable.)

PUBLIC EVACUATION PLAN:

(When the supervisor has determined that the General Public will be involved, the following plan will be implemented)

- 1) Notification of the emergency response agencies of the hazardous condition and Implement evacuation procedures.
- 2) A trained person in H₂S safety, shall monitor with detection equipment the H₂S Concentration, wind and area of exposure (ROE). This person will determine the outer perimeter of the hazardous area. The extent of the evacuation area will be determined from the data being collected. Monitoring shall continue until the situation has been resolved. (All monitoring equipment will be UL approved, for use in class I groups A,B,C & D, Division I, hazardous locations. All monitors will have a minimum capability of measuring H₂S, oxygen, and flammable values.)
- 3) Law enforcement shall be notified to set up necessary barriers and maintain such for the duration of the situation as well as aid in the evacuation procedure.
- 4) The company supervising personnel shall stay in communication with all agencies through out the duration of the situation and inform such agencies when the situation has been contained and the effected area(s) is safe to enter.



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

SUPO Data Report

APD ID: 10400023373 Submis

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT SOUTH

Well Type: OIL WELL

Submission Date: 11/01/2017

Well Number: 202H

Well Work Type: Drill



Show Final Text

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Bell_Lake_Unit_South_202H_Roads_20171101162311.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

Bell_Lake_Unit_South_202H_Access_Road_20171101162604.pdf

New road type: RESOURCE

Length: 1138.6

Feet

Width (ft.): 25

Max slope (%): 2

Max grade (%): 2

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 15

New road access erosion control: Road construction requirements and regular maintenance would alleviate potential impacts to the access road from water erosion damage.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Access surfacing type: OTHER

Access topsoil source: BOTH

Access surfacing type description: Native caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description: Material will be obtained from BLM caliche pit in SWSW Section 22-T24S-R34E or NENE Section 20- T23S-R33E

Onsite topsoil removal process: The top 6 inches of topsoil is pushed off and stockpiled along the side of the location. An approximate 160' X 160' area is used within the proposed well site to remove caliche. Subsoil is removed and stockpiled within the pad site to build the location and road. Then subsoil is pushed back in the hole and caliche is spread accordingly across proposed access road.

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: Proposed access road will be crowned and ditched and constructed of 6 inch rolled and compacted caliche. Water will be diverted where necessary to avoid ponding, maintain good drainage, and to be consistentwith local drainage patterns.

Road Drainage Control Structures (DCS) description: The ditches will be 3' wide with 3:1 slopes

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Bell_Lake_Unit_South_202H_1_Mile_20171101162811.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: Production facilities are planned for the south side of pad. Plan for initial wells: 2-1000 bbl water tanks and 5-1000 bbl oil tanks, a temporary 6X20 horizontal 3-phase sep, a 48" X 10' 3-phase sep, a 8 X 20' heater treater and a 48"X 10' 2-phase sep

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: INTERMEDIATE/PRODUCTION CASING

Water source type: OTHER

Describe type: BRINE WATER

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: TRUCKING

Source transportation land ownership: OTHER

Describe transportation land ownership:

Water source volume (barrels): 20000 Source volume (acre-feet): 2.577862

Source volume (gal): 840000

Water source use type: OTHER, STIMULATION, SURFACE CASING Water source type: OTHER

Describe type: FRESH WATER

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: TRUCKING

Source transportation land ownership: OTHER

Describe transportation land ownership:

Water source volume (barrels): 250000

Source volume (acre-feet): 32.223274

Source volume (gal): 10500000

Water source and transportation map:

Bell_Lake_Unit_South_202H_WTR_SOURCE_20171101162954.pdf

Water source comments: Source transportation land ownership is a mixture of Federal, State and County.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Aquifer comments:

Aquifer documentation:

Well depth (ft): Well casing type:

Well casing outside diameter (in.): Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method: Drill material:

Grout material: Grout depth:

Casing length (ft.): Casing top depth (ft.):

Well Production type: Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: On site caliche will be used for construction if sufficient. In the event insufficient quantities of caliche are available onsite, caliche will be trucked in from BLM's caliche pit in SWSW Section 22-T24-R34E or NENE Section 20- T23S-R33E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and cuttings

Amount of waste: 3900 barrels

Waste disposal frequency: One Time Only

Safe containment description: All drilling fluids will be stored safely and disposed of properly

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Cuttings will be hauled to R360's facility on US 62/180 at Halfway, NM

Waste type: SEWAGE

Waste content description: Human waste and grey water

Amount of waste: 1000 gallons

Waste disposal frequency: One Time Only

Safe containment description: Waste material will be stored safely and disposed of properly

Safe containment attachment:

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: GARBAGE

Waste content description: Miscellaneous trash

Amount of waste: 500

pounds

Waste disposal frequency: One Time Only

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash

container and disposed of properly Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Cuttings will be stored in roll off bins and hauled to R360 on US 62/180 near Halfway.

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Well Number: 202H Well Name: BELL LAKE UNIT SOUTH

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Bell Lake Unit South 202H WellSite Layout_20171101163219.pdf Bell Lake Unit_South_202H_Rig_Layout_20171101163230.pdf Comments:

Section 10 - Plans for Surface Reclamation

Multiple Well Pad Name: SOUTH BELL LAKE UNIT Type of disturbance: New Surface Disturbance

Multiple Well Pad Number: 0

Recontouring attachment:

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff and siltation of the surrounding area. As per request of rancher, a berm will be constructed along the east side of well pad.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area.

Well pad proposed disturbance

(acres):

Road proposed disturbance (acres):

Powerline proposed disturbance (acres):

Pipeline proposed disturbance (acres):

Total proposed disturbance:

Other proposed disturbance (acres):

Well pad interim reclamation (acres): Well pad long term disturbance

5.97

Road interim reclamation (acres): 0.65 Road long term disturbance (acres):

Powerline interim reclamation (acres):

Pipeline interim reclamation (acres): 0 (acres):

Other interim reclamation (acres): 0

Total interim reclamation: 6.62

(acres): 3.44

Powerline long term disturbance

Pipeline long term disturbance

(acres): 0

Other long term disturbance (acres): 0

Total long term disturbance: 3.83

Disturbance Comments: Plan to reclaim 150' on the north side and 100' on the west side of well pad.

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Well Name: BELL LAKE UNIT SOUTH Well Number: 202H

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite, shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses **Existing Vegetation at the well pad attachment:**

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline:

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances:

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

PLS pounds per acre:

Proposed seeding season:

Seed Summary
Seed Type Pounds/Acre

Total pounds/Acre:

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: No invasive species present. Standard regular maintenance to maintain a clear location and road.

Weed treatment plan attachment:

Monitoring plan description: Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.

Monitoring plan attachment:

Success standards: To maintain all disturbed areas as per Gold Book standards

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: STATE GOVERNMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

Operator Name: KAISER FRANCIS OIL COMPANY Well Name: BELL LAKE UNIT SOUTH Well Number: 202H **DOD Local Office: NPS Local Office:** State Local Office: COMMISSIONER OF PUBLIC LANDS, PO BOX 1148, SANTA FE, NM 87504 **Military Local Office: USFWS Local Office: Other Local Office: USFS Region: USFS Forest/Grassland: USFS Ranger District:** Fee Owner: Mark T. McCloy & Annette E McCloy Fee Owner Address: PO Box 795 Tatum, NM 88267 Email: Phone: (432)940-4459 Surface use plan certification: NO Surface use plan certification document: Surface access agreement or bond: Agreement Surface Access Agreement Need description: Surface Use and Compensation Agreement dated October 4, 2016 between Mark T McCloy and Annette E McCloy Revocable Living Trust and Kaiser-Francis Oil Company **Surface Access Bond BLM or Forest Service: BLM Surface Access Bond number: USFS Surface access bond number:** Disturbance type: NEW ACCESS ROAD Describe: **Surface Owner: STATE GOVERNMENT** Other surface owner description: **BIA Local Office: BOR Local Office: COE Local Office: DOD Local Office: NPS Local Office:** State Local Office: COMMISSIONER OF PUBLIC LANDS, PO BOX 1148, SANTA FE, NM 87504-1148

Military Local Office: USFWS Local Office:

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information: SUP Attached

Use a previously conducted onsite? YES

Previous Onsite information: Onsite held 7/20/17 with Fernando Banos (BLM), Matt Warner & Melanie Wilson (Kaiser-Francis), Jimmy Harrison (John West Surveying) and Jeff (APAC Archaeology)

Other SUPO Attachment

 $Bell_Lake_Unit_South__202H_SUP_20171101163432.pdf$

Bell_Lake_Unit_South__202H_SPCC_PLAN_20171101163520.pdf



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

PWD disturbance (acres):

APPENDIX F: Written Commitment of Manpower, Equipment, and Materials

In addition to implementing the preventive measures described in this Plan, Kaiser-Francis Oil Company will also:

In the event of a discharge:

- Make available trained field personnel to perform response actions
- Obtain assistance from additional employees from its main operations contractor.
- Collaborate with local, state, and federal authorities on response and cleanup operations.

Maintain all on-site oil spill control equipment described in this Plan and in the attached Oil Spill Contingency Plan.

Maintain all communications equipment in operating condition at all times.

Ensure that staging areas are accessible by field vehicles.

Review the adequacy of on-site and third party response capacity with preestablished response/cleanup contractors.

Maintain formal agreements/contracts with response and cleanup contractors who will provide assistance in responding to an oil discharge and/or completing cleanup.

Facility: South Bell Lake Pad 0

Page 32 of 32

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO Produced Water Disposal (PWD) Location: PWD surface owner: PWD disturbance (acres): Unlined pit PWD on or off channel: Unlined pit PWD discharge volume (bbl/day): Unlined pit specifications: Precipitated solids disposal: Decribe precipitated solids disposal: Precipitated solids disposal permit: Unlined pit precipitated solids disposal schedule: Unlined pit precipitated solids disposal schedule attachment: Unlined pit reclamation description: Unlined pit reclamation attachment: Unlined pit Monitor description: **Unlined pit Monitor attachment:** Do you propose to put the produced water to beneficial use? Beneficial use user confirmation: Estimated depth of the shallowest aquifer (feet): Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected? TDS lab results: Geologic and hydrologic evidence: State authorization: **Unlined Produced Water Pit Estimated percolation:** Unlined pit: do you have a reclamation bond for the pit? Is the reclamation bond a rider under the BLM bond? Unlined pit bond number: Unlined pit bond amount: Additional bond information attachment: Section 4 - Injection Would you like to utilize Injection PWD options? NO **Produced Water Disposal (PWD) Location:**

PWD disturbance (acres):

Injection well mineral owner:

Injection PWD discharge volume (bbl/day):

PWD surface owner:

Injection well type:	
Injection well number:	Injection well name:
Assigned injection well API number?	Injection well API number:
Injection well new surface disturbance (acres):	
Minerals protection information:	
Mineral protection attachment:	
Underground Injection Control (UIC) Permit?	
UIC Permit attachment:	
Section 5 - Surface Discharge	
Would you like to utilize Surface Discharge PWD options? NO	
Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Surface discharge PWD discharge volume (bbl/day):	
Surface Discharge NPDES Permit?	
Surface Discharge NPDES Permit attachment:	
Surface Discharge site facilities information:	
Surface discharge site facilities map:	
Section 6 - Other	
Would you like to utilize Other PWD options? NO	
•	
Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Other PWD discharge volume (bbl/day):	
Other PWD type description:	
Other PWD type attachment:	
Have other regulatory requirements been met?	
Other regulatory requirements attachment:	

.

Bond Information

Federal/Indian APD: FED

BLM Bond number: WYB000055

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/27/2018

APD ID: 10400023373

Well Type: OIL WELL

Submission Date: 11/01/2017

Operator Name: KAISER FRANCIS OIL COMPANY

Well Name: BELL LAKE UNIT SOUTH

Well Number: 202H

Well Work Type: Drill



Show Final Text

Section 1 - Geologic Formations

Formation			True Vertical	Measured			Producing
ID	Formation Name	Elevation	Depth	Depth	Lithologies	Mineral Resources	Formation
1		3632	0	0		NONE	No
2	RUSTLER	2233	1400	1400		NONE	No
3	SALADO	1808	1825	1825		NONE	No
4	TOP SALT	1633	2000	2000		NONE	No
5	BASE OF SALT	-1367	5000	5000		NONE	No
6	LAMAR	-1567	5200	5200		NATURAL GAS,OIL	No
7	BELL CANYON	-1767	5400	5400		NATURAL GAS,OIL	No
8	CHERRY CANYON	-2617	6250	6250		NATURAL GAS,OIL	No
9	BRUSHY CANYON	-4092	7725	7725		NATURAL GAS,OIL	No
10	BONE SPRING	-5232	8865	8865		NATURAL GAS,OIL	No
11	AVALON SAND	-5424	9057	9057		NATURAL GAS,OIL	No
12	BONE SPRING 1ST	-6467	10100	10100		NATURAL GAS,OIL	No
13	BONE SPRING 2ND	-7002	10635	10635	<u></u> .	NATURAL GAS,OIL	Yes
14	BONE SPRING LIME	-7517	11150	11150		NATURAL GAS,OIL	No
15	BONE SPRING 3RD	-7997	11630	11630		NATURAL GAS,OIL	No
16	WOLFCAMP	-8302	11935	11935		NATURAL GAS,OIL	No

Section 2 - Blowout Prevention