

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

HOBBBS OGD OCT 24 2018 RECEIVED		WELL API NO. 30-025-42737
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		6. State Oil & Gas Lease No.
2. Name of Operator EOG RESOURCES INC		7. Lease Name or Unit Agreement Name ARCH 28 STATE
3. Address of Operator PO BOX 2267 MIDLAND, TX 79702		8. Well Number 601H
4. Well Location Unit Letter A : 249 feet from the NORTH line and 330 feet from the EAST line Section 32 Township 22S Range 35E NMPM County LEA		9. OGRID Number 7377
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3537' GR		10. Pool name or Wildcat PEARL; BONE SPRING, SOUTH

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

EOG proposes to plug this well using the following procedure, present depth 5':

1. RIH w/WS, fill hole w/ .4 yds cmt to surface
2. WOC, top off to surface
3. After filling w/redi mix, cut off locking device and install ground level dry hole marker

**See Attached
Conditions of Approval**

Spud Date:

9/29/2015

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Kay Maddox

TITLE **Regulatory Analyst**

DATE **10/23/2018**

Type or print name **Kay Maddox**

E-mail address: **kay_maddox@eogresources.com** PHONE: **432-686-3658**

For State Use Only

APPROVED BY:

Mark White

TITLE **P.E.S.**

DATE **10/24/2018**

Conditions of Approval (if any):


Well Name: Arch 28 State #601H
Location: 249' FNL & 330' FEL Sec. 28-22S-35E
County: Lea, NM
Lat/Long: 32.36930195,-103.3650467 NAD83
API #: 30-025-42737
Spud Date: 9/29/15
Compl. Date:



Proposed Wellbore Diagram:

KB:
GL: 3,537'

20" Hole



TD @ 5'


Well Name: Arch 28 State #601H
Location: 249' FNL & 330' FEL Sec. 28-22S-35E
County: Lea, NM
Lat/Long: 32.36930195,-103.3650467 NAD83
API #: 30-025-42737
Spud Date: 9/29/15
Compl. Date:



Current Wellbore Diagram:

KB:
GL: 3,537'

20" Hole

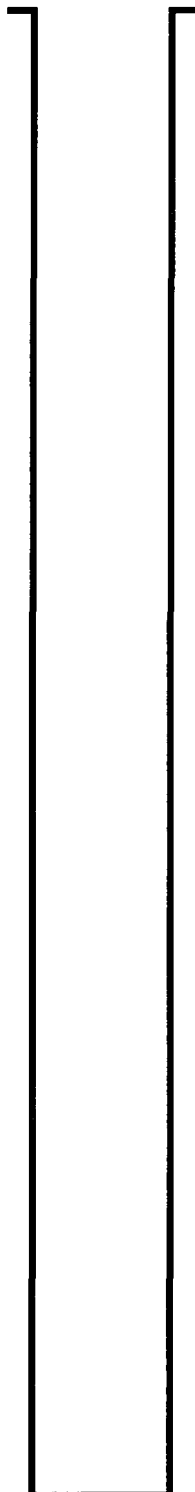

TD @ 5'

GENERAL CONDITIONS OF APPROVAL:

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. Approved procedures are good for a period of one year from approved date, unless otherwise specified on the C103 intent. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'.