

Submit 1 Copy To Appropriate District Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
Revised July 18, 2013

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

JAN 28 2019

WELL API NO.  
30-025-01202

5. Indicate Type of Lease  
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

State A Bird Creek

8. Well Number 7

9. OGRID Number  
240974

10. Pool name or Wildcat  
Saunders; Permo Upper Penn

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL OR TO ABANDON A WELL OR TO RECOMPLETION A WELL OR TO PERFORM REMEDIAL WORK OR TO ALTER A WELL OR TO PERFORM OTHER WORK ON A WELL. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

LEGACY RESERVES OPERATING LP

3. Address of Operator

PO BOX 10848, MIDLAND, TX 79702

4. Well Location

Unit Letter G : 1980 feet from the North line and 2310 feet from the East line  
Section 34 Township 14S Range 33E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
4197.10' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐  
CLOSED-LOOP SYSTEM ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Legacy Reserves proposes to P&A the State A Bird Creek #7 as follows:

- Set CIBP @ ~9,750' w/50' cmt on top (TOC @ ~9,700'). Tag.
- Cut & pull 5-1/2" csg @ ~8,700'.
- Spot cmt 50' in/50' out across 5-1/2" csg stub (~8,650'-8,750'). Tag.
- Spot cmt 50' in/50' out across 8-5/8" csg shoe (~4,178'-4,278'). Tag.
- Spot 100' cmt plug across 13-3/8" csg shoe fr/316'-416'. Tag.
- Set 60' cmt plug fr/surface - 60'.
- Cap well & install P&A marker.

See attached well bore diagrams.

spot 40 30 Sx Class C 1700'

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Laura Pina TITLE Compliance Coordinator DATE 01/25/2019

Type or print name Laura Pina E-mail address: lpina@legacylp.com PHONE: 432-689-5200

For State Use Only

APPROVED BY: Kerry Forther TITLE Compliance Officer A DATE 2-1-19


Conditions of Approval (if any):



### Current Wellbore Condition

FIELD:	SAUNDERS PERMO UPPER PENN	GL:	4,197.10'	DATE:	1/24/2019
LEASE:	STATE A BIRD CREEK	KB:	4,209'	BY:	DPD/BK
COUNTY:	LEA	SPUD DATE:	4-24-1958	WELL:	7
STATE:	NEW MEXICO	API No:	3002501202		

LOCATION: 1980' FNL & 2310' FEL, SECTION 34, T14S, R33E

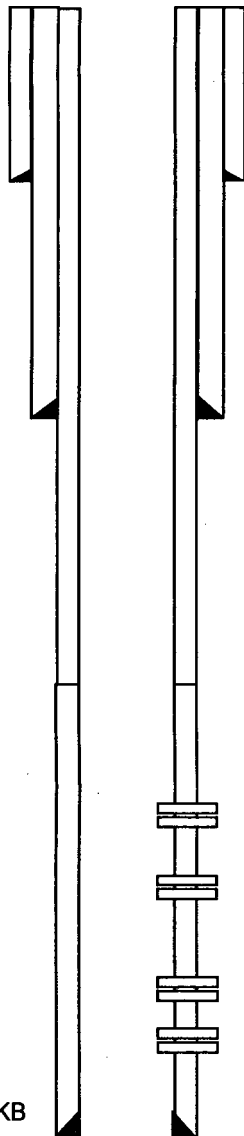

13 3/8" Surf Csg; 13 3/8", 366 ftKB; Cmt w/400-sx, Circ w/ 45 sx

8-5/8" Int Csg; 8 5/8", 4,228 ftKB; Cmt w/ 901 sx, Circ w/ 84 sx

TOC 8,755' by TS

Perfs: 9,794' – 9,806'  
9,822' – 9,830'

Perfs: 9,842' – 9,848'  
9,854' – 9,860'  
9,865' – 9,869'

Perfs: 9,879' – 9,886'

Perfs: 9,916' – 9,922'  
9,936' – 9,940'  
9,963' – 9,973'  
9,977' – 9,988'

PBTD: 10,057' KB

TD: 10,058' KB  
(MD)


5 1/2" 15.5# Prod Csg; 5 1/2", 17.00 lbs/ft, S-95, 10,057' ftKB; Cmt w/200 sx



### Proposed Wellbore Condition

FIELD:	SAUNDERS PERMO UPPER PENN	GL:	4,197.10'	DATE:	1/24/2019
LEASE:	STATE A BIRD CREEK	KB:	4,209'	BY:	DPD/BK
COUNTY:	LEA	SPUD DATE:	4-24-1958	WELL:	7
STATE:	NEW MEXICO	API No:	3002501202		

LOCATION: 1980' FNL & 2310' FEL, SECTION 34, T14S, R33E

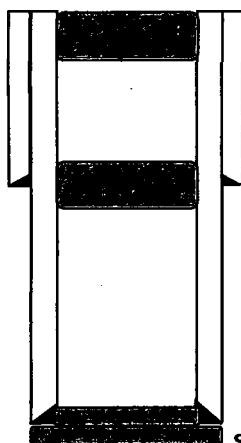


60' surface plug (~0'-60').

13 3/8" Surf Csg; 13 3/8", 366 ftKB; Cmt w/400 sx, Circ w/ 45 sx  
Spot cmt 100' across 13-3/8" csg shoe (~316'-416').

8-5/8" Int Csg; 8 5/8", 4,228 ftKB; Cmt w/ 901 sx, Circ w/ 84 sx  
Spot cmt 50' in/50' out across 8-5/8" csg shoe (~4,178'-4,278').

Cut & pull 5-1/2"  
csg @ ~8,700'.

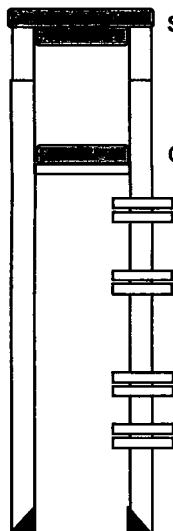

Spot cmt 50' in/50' out across 5-1/2" csg stub (~8,650'-8,750').

TOC 8,755' by TS

CIBP @ 9,750' w/50' cmt on top (9,700').

Perfs: 9,794' - 9,806'  
9,822' - 9,830'

Perfs: 9,842' - 9,848'  
9,854' - 9,860'  
9,865' - 9,869'

Perfs: 9,879' - 9,886'

Perfs: 9,916' - 9,922'  
9,936' - 9,940'  
9,963' - 9,973'  
9,977' - 9,988'

PBTD: 10,057' KB

TD: 10,058' KB  
(MD)

5 1/2" 15.5# Prod Csg; 5 1/2", 17.00 lbs/ft, S-95, 10,057' ftKB; Cmt w/200 sx