

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	7. Lease Name or Unit Agreement Name SE Lea
2. Name of Operator Blake Production Co., LLC	8. Well Number 4
3. Address of Operator 1601 NW Expressway, Oklahoma City, OK 73118	9. OGRID Number 2538
4. Well Location Unit Letter <u>G</u> : <u>2455</u> feet from the <u>N</u> line and <u>1462</u> feet from the <u>E</u> line Section <u>26</u> Township <u>20S</u> Range <u>35E</u> NMPM Lea County	10. Pool name or Wildcat Eumont, Yates-7rivers-Queen, Oil
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3677 GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Test BOP and Casing, OK. After waiting 18 hrs on cement a 7 7/8" hole was commenced at 11:15 am 4/11/2019. The hole was drilled to a depth of 5170' and TDD at 10:30 am 4/14/2019. The well was drilled with Baker Platform Express tools and after review the well was determined to be un-economical.

We propose to load the hole with plug mud and plug the well as follows.

Plug #1: 35 sx Class C @ 3835', 3735-3835' to cover the top of the Yates formation @ 3785'

Plug #2: 60 sx Class C @ 2130', 1939 to 2130' to cover the top of salt @ 2080 and the 8 5/8" casing shoe @ 1989'

Plug #3: 35 sx Class C @ 100', Surface to 100'

After plugging the wellhead will be cut off 3' below ground level and a plate and dry hole marker will be installed.

Spud Date:

4/7/2019

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Consultant

DATE 4/16/19

Type or print name Phelps White

E-mail address: pwiv@zianet.com

PHONE: 575 626 7660

For State Use Only

APPROVED BY:

TITLE Compliance Officer

DATE 4-18-19

Conditions of Approval (if any):




WELL BORE DIAGRAM

PROPOSED PLUGS

Plug 3: 35 sx class C
Surface - 100'

Plug 2: 60 sx class C
1939-2130'

Plug 1: 35 sx Class C
3735-3835'

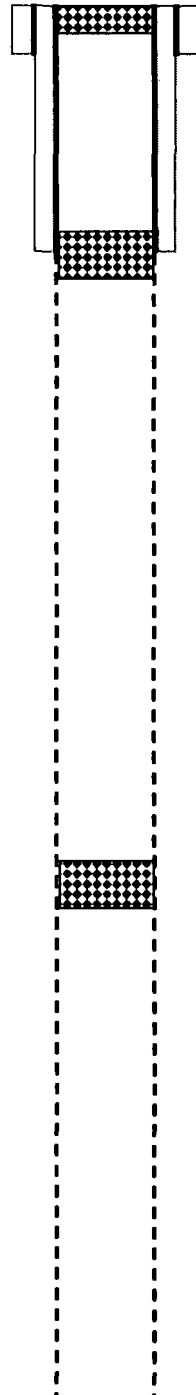

40' 16" Conductor, 4/2/19

8 5/8" 32# J-55 @ 1989'
Lead 760 sx C lite
Tail 230 sx C w/ 2% Cacl
Circulate 120 bbls to pits

SE Lea S4
API #30-025-45627

Depth	Deviation
238	0.5
547	1.5
640	1.25
830	1
991	1
1245	0.75
1499	0.5
1689	0.75
2187	0.75
2534	1.5
	1
3039	3
3165	3.12
3261	4.12
3355	3.75
3451	3
3545	4
3755	3
3830	1.25
3862	2.5
4147	2.75
4387	2.25
4689	2
4906	2

TD: 5170'