Submit   Copy To Appropriate District	State of New Maria			Farme C 102
Office	State of New Mexico Energy, Minerals and Natural Resources		Form C-103 Revised July 18, 2013	
<u>District 1</u> – (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240	Energy, Minerals and Natural Resol		WELL API NO.	
District II - (575) 748-1283 811 S. First St., Artesia, NM 88210	OIL CONSERVATION DIVISI	on		5-23553
District III - (505) 334-6178	1220 South St. Francis Dr.		5. Indicate Type of L STATE	Lease FEE
1000 Rio Brazos Rd., Aztec, NM 87410 District IV - (505) 476-3460	Santa Fe, NM 87505	DBBS	OstateDil & Gas L	ease No.
1220 S. St. Francis Dr., Santa Fe, NM	•			2229
87505 SUNDRY NO	TICES AND REPORTS ON WELLS	1AY 03	AlgLease Name or Ur	nit Agreement Name
		O A	Phi	imex
PROPOSALS.)	POSALS TO DRILL OR TO DEEPEN OR PLUG BACK T LICATION FOR PERMIT" (FORM C-101) FOR SUC	ECEIN	E Well Number	
1. Type of Well: Oil Well	Gas Well D Other			1
2. Name of Operator	onocoPhillips Company		9. OGRID Number	7817
3. Address of Operator	nocor maps Company		10. Pool name or Wi	
925 N. Eldr	idge Parkway Houston TX 77079		Maljama	r (GB/SA)
4. Well Location				
Unit Letter P :	660feet from theSoutth line and			Eastline
Section 27	Township 17-S Range	33-E	NMPM	County Lea
	11. Elevation (Show whether DR, RKB, RT 4150' GL	, UK, eIC.)		
PERFORM REMEDIAL WORK [ TEMPORARILY ABANDON [ PULL OR ALTER CASING [ DOWNHOLE COMMINGLE [ CLOSED-LOOP SYSTEM [ OTHER: 13. Describe proposed or cor of starting any proposed proposed completion or r MIRU RIH Spot Perf ( PeOD	CHANGE PLANS COMME MULTIPLE COMPL CASING MULTIPLE COMPL CASING OTHER npleted operations. (Clearly state all pertinent c work). SEE RULE 19.15.7.14 NMAC. For Mu ecompletion. J. ND WH, NU BOP. POOH w/ Prod. Equipme WL – Set CIBP @ 4,198' Circ hole w/ MLF. Sp 25sx cmt @ 2805'-2605'. @ 1442' – Sqz 40sx cmt to 1342'. WOC-Tag # 10' – Circ 110sx cmt to surface H. Fill wellbore. Verify cmt @ surface in all and ff WH & anchors. Install DH marker	AL WORK ENCE DRIL S/CEMENT details, and ultiple Com ent bot 40sx cm	LING OPNS. P	TERING CASING
**A closed-loop system	n will be used for all fluids from this wellbore and	disposed of	f required by OCD Rul	e 19.15.17**
Saud Dates	Dis Balance Date			]
Spud Date:	Rig Release Date:			j
I hereby certify that the information	on above is true and complete to the best of my	knowledge	and belief.	
	TITLEP&A Tech - Ba			5/3/19
Type or print nameChris R For State Use Only	omero E-mail address:	<u> </u>	PHONE	:432-563-3355
			•	
APPROVED BY: Kerny	Forther TITLE Compliance	Offic	<u>c A</u> DATE	5-7-19
Conditions of Approval (if ary):	Ŭ	γv		

WELLBORE SKETCH ConocoPhillips Company -- Permian Basin Business Unit

Date: 5/2/2019 RKB @ <u>4150'</u> DF @ <u>4150'</u> GL @ <u>4140'</u> \_ 
 Subarea :
 Buckeye West

 Lease & Well No :
 Philmex 11

 Legal Description :
 Sec 27 P - T 17 S - R- 33 E
KE1 LEA MALJAMAR State : New Mexico 12 County Field : Date Spudded : API Number 8/14/1970 3002523553 Surface B-5/8", 24#/ft to 360' Cmt'd w/ 300 SX TOC - Circ'd to surface Operator Number Lease ID Field Number: See Tubing & Rods Tab for equipment details Production 4-1/2", 11.6#/ft to 4702" Cmt'd w/ 275 SX TOC - 2625' by TS 


 Image: Second state of the second s Grayburg Perfd San Andres Perfd San Andres Perf'd 4654' - 4864'

o:leveryonelwellfile/maljamar/mca/Philmex 011\_current WBD



- ... -----

WELLBORE SKETCH ConocoPhillips Company -- Permian Basin Business Unit

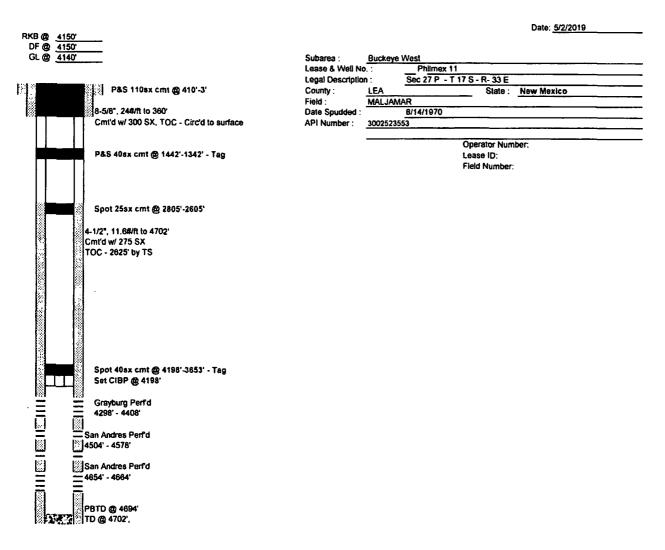

## **GENERAL CONDITIONS OF APPROVAL:**

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. <u>Approved procedures are</u> good for a period of **one year** from approved date, unless otherwise <u>specified on the C103 intent</u>. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'. Plugs should be no more than 3000' apart
- 9) Site remediation due within one year of well plugging completion.